

HAY RANCH PROJECT CONDITIONAL USE PERMIT HYDROLOGIC MONITORING REPORT

FOURTH QUARTER 2017
INYO COUNTY, CALIFORNIA



PREPARED FOR



PREPARED BY

TEAM

ENGINEERING & MANAGEMENT, INC.
Bishop and Mammoth Lakes, California

JANUARY 26, 2018

Dr. Bob Harrington
Inyo County Water Department
135 South Jackson Street
Independence, CA 93526

January 26, 2018

**RE: Hay Ranch Project Conditional Use Permit
Hydrologic Monitoring Report, Fourth Quarter 2017
Inyo County, California**

Dear Dr. Harrington:

TEAM Engineering & Management, Inc. (TEAM), is pleased to present the results of hydrologic monitoring activities, relating to the Hay Ranch Project Conditional Use Permit (#2007-003), conducted in Rose Valley from October to December 2017.


This report, entitled "*Hay Ranch Project Conditional Use Permit Hydrologic Monitoring Report, Fourth Quarter 2017, Inyo County, California*," was produced per the guidelines of the Inyo County Water Department and the Coso Operating Company Hay Ranch Water Extraction and Delivery System Final Environmental Impact Report's Hydrologic Monitoring and Mitigation Plan.

Information provided in this report includes a summary of Rose Valley monitoring activities conducted during Phase 1 of the Hay Ranch Project in 2009. This report also includes hydrologic monitoring data collected during Phase 2 and Phase 4 of the Hay Ranch Project from December 2009 through December 2017. This report presents groundwater elevation, surface flow, water quality, and Hay Ranch North and South production well pumping data, in tabular and graphical form.

If you have any questions or require additional information, please contact TEAM at your convenience.

Sincerely,

TEAM Engineering & Management, Inc.



Greg Foote
Senior Environmental Scientist

Cc: Chris Ellis, Coso Operating Company LLC

S:\Coso.HR CUP_Q4_2017_cl

**HAY RANCH PROJECT CONDITIONAL USE PERMIT
HYDROLOGIC MONITORING REPORT
FOURTH QUARTER 2017
INYO COUNTY, CALIFORNIA**

TABLE OF CONTENTS

| <u>Section</u> | <u>Page</u> |
|--|-------------|
| 1.0 EXECUTIVE SUMMARY | 1 |
| 2.0 INTRODUCTION..... | 2 |
| 2.1 BACKGROUND | 2 |
| 3.0 PHASE 1: MONITORING AND REPORTING | 5 |
| 3.1 ROSE VALLEY MONITORING POINTS | 5 |
| 3.2 PORTUGUESE BENCH MONITORING POINTS | 6 |
| 3.3 LITTLE LAKE RANCH MONITORING POINTS | 6 |
| 3.4 SUPPLEMENTAL DATA COLLECTION | 8 |
| 3.5 BASELINE GROUNDWATER LEVELS..... | 8 |
| 4.0 PHASE 4: ONGOING MONITORING, MITIGATION AND REPORTING | 10 |
| 4.1 MONITORING AND REPORTING | 10 |
| 4.2 GROUNDWATER QUALITY | 12 |
| 4.3 DATA COLLECTION AND PROCESSING | 12 |
| 4.4 OPERATIONAL NOTES | 13 |
| 4.5 ADDITIONAL OBSERVATIONS | 13 |
| 5.0 GENERAL CONDITIONS | 14 |

LIST OF TABLES

| <u>Table</u> | <u>Title</u> |
|---------------------|--|
| TABLE 1 | HAY RANCH PROJECT MONITORING POINT SUMMARY |
| TABLE 2 | HAY RANCH PROJECT GROUNDWATER PUMPING TO DATE |
| TABLE 3 | HAY RANCH PROJECT GROUNDWATER BASELINES AND TRIGGER LEVELS |

LIST OF FIGURES

| <u>Figure</u> | <u>Title</u> |
|----------------------|--|
| FIGURE 1 | OVERVIEW OF ROSE VALLEY HYDROLOGIC MONITORING POINTS |
| FIGURE 2 | LITTLE LAKE RANCH AREA |
| FIGURE 3 | GWE AND HAY RANCH PUMPING: CAL PUMICE, DUNMOVIN, HR 1A AND HR 2A |
| FIGURE 4 | GWE AND HAY RANCH PUMPING: HR 1A, HR 1B AND HR 1C |
| FIGURE 5 | GWE AND HAY RANCH PUMPING: HR 2A, HR 2B AND HR 2C |
| FIGURE 6A | GWE AND HAY RANCH PUMPING: COSO JCT RANCH AND COSO JCT STORE #1 |
| FIGURE 6B | GWE AND HAY RANCH PUMPING: HR 1A, HR 2A, COSO JCT RANCH AND COSO JCT STORE #1 |
| FIGURE 7 | GWE AND HAY RANCH PUMPING: DAVIS RANCH NORTH AND SOUTH |
| FIGURE 8 | GWE AND HAY RANCH PUMPING: RED HILL, LEGO AND G-36 |
| FIGURE 9 | GWE AND HAY RANCH PUMPING: 18-28 AND CINDER ROAD |
| FIGURE 10 | GWE AND HAY RANCH PUMPING: FOSSIL FALLS AND LLR NORTH |
| FIGURE 11 | WATER ELEVATION AND HAY RANCH PUMPING: LLR DOCK, STILLING AND HOTEL |
| FIGURE 12 | WATER ELEVATION AND LITTLE LAKE OUTFLOW: LLR DOCK AND LLR STILLING |
| FIGURE 13 | LLR FLOW AND HAY RANCH PUMPING: NORTH CULVERT, COSO SPRINGS, AND LITTLE LAKE OUTFLOW |
| FIGURE 14 | TDS AND HAY RANCH PUMPING: HR 1A, HR 1B, AND HR 1C |
| FIGURE 15 | TDS AND HAY RANCH PUMPING: HR 2A, HR 2B, AND HR 2C |
| FIGURE 16 | TDS AND HAY RANCH PUMPING: RED HILL AND LLR NORTH |
| FIGURE 17 | ACTUAL AND MAXIMUM ALLOWABLE TOTAL PUMPING AMOUNTS FOR HAY RANCH PROJECT |

LIST OF APPENDIXES

| <u>Appendix</u> | <u>Title</u> |
|------------------------|--|
| APPENDIX A | HAY RANCH PROJECT CUP HYDROGRAPHS, FOURTH QUARTER 2017 |

**HAY RANCH PROJECT CONDITIONAL USE PERMIT
HYDROLOGIC MONITORING REPORT
FOURTH QUARTER 2017
INYO COUNTY, CALIFORNIA**

1.0 EXECUTIVE SUMMARY

The following summarizes hydrologic monitoring activities during Fourth Quarter 2017, related to the Coso Operating Company's Hay Ranch Project Conditional Use Permit (CUP):

- Hay Ranch Project CUP pumping was initiated on December 25, 2009. A total of approximately 5.57 billion gallons of groundwater (17,103 acre-feet) have been pumped from the Hay Ranch North and South production wells through December 13, 2017. Approximately 400 acre-feet of groundwater were pumped from the Hay Ranch wells from September 13 to December 13, 2017. The cumulative total of pumped groundwater from 2009 through 2017 complies with Inyo County Water Department's (ICWD) allotment for the Hay Ranch Conditional Use Permit.
- During Fourth Quarter 2017, monthly groundwater and surface water data were collected from monitoring points throughout Rose Valley as per the schedule set forth in the Hay Ranch Project CUP's Hydrologic Monitoring and Mitigation Plan.
- Based on Fourth Quarter 2017 groundwater monitoring data and using the updated Maximum Allowable Pumping amounts and Trigger Levels, the water level at Little Lake Ranch (LLR) North was measured in exceedance of its revised Trigger Level in October 2017. There were no other Trigger Levels exceeded in project wells during the fourth quarter and none of the Maximum Acceptable Drawdown levels were exceeded, based on the Trigger Levels which were effective June 1, 2017.
- Quarterly groundwater samples were collected from the Coso Junction Store #2 and Little Lake Ranch North wells. These samples were analyzed for Total Dissolved Solids. None of these samples exceeded "Threshold Requiring Action" levels.
- Quarterly hydrographs, which compare Rose Valley groundwater elevations, surface flow amounts, and Total Dissolved Solid data to Hay Ranch Project CUP pumping amounts over time, are included in this report.
- TEAM provided monthly data, including groundwater and surface water hydrographs, to ICWD. Monthly update letters and groundwater and surface water hydrographs have been posted on the ICWD's public website: www.inyowater.org

2.0 INTRODUCTION

The Coso Operating Company, LLC (COC) operates a geothermal electric generating plant located to the east of Rose Valley in the Coso Mountains in Inyo County, California. COC proposed a project to pump water into the Coso geothermal field from groundwater wells located on the COC Hay Ranch Property in the Rose Valley Basin. Inyo County, as lead agency, approved the Final Environmental Impact Report (FEIR) associated with this project in 2009, issuing a Conditional Use Permit (CUP) for the project: Hay Ranch Water Extraction Project CUP #2007-03 (Hay Ranch Project). The FEIR includes a Hydrologic Monitoring and Mitigation Plan (HMMP) which stipulates monitoring and mitigation requirements associated with the project. The primary objective of the HMMP is to protect the groundwater and surface water quality and availability in Rose Valley. In May 2009, Inyo County Water Department (ICWD) approved TEAM Engineering & Management, Inc. (TEAM) as the objective, third-party groundwater monitor with respect to the monitoring requirements stipulated in the HMMP.

2.1 BACKGROUND

The Rose Valley hydrologic system has been the subject of sporadic research since the early 1900s. Recent, more intensive study includes work by C. M. Bauer in 1996, and numerous studies from 2000 to the present related to the proposed Hay Ranch Project. COC has conducted groundwater monitoring since 2002 at a number of the monitoring wells specified in the HMMP. In addition to being used as an irrigation water supply well in the 1980s, the Hay Ranch South Well, the primary production well for the Hay Ranch Project, underwent two recent pump tests. In 2003, a 24-hour pump test was conducted, and groundwater elevation data was collected during this test. Then, from November to December 2007, a 14-day constant discharge aquifer test was conducted to evaluate potential impacts of the Hay Ranch Project. Groundwater elevation data was collected during this test both by data-logging pressure transducers and manual measurements taken with a depth-to-water (DTW) sounder in various Rose Valley wells.

As part of the California Environmental Quality Act (CEQA) process for the Hay Ranch Project, a Draft Environmental Impact Report (DEIR) and FEIR were produced from 2004 to 2009 with the creation of a numerical groundwater model for Rose Valley and a proposed HMMP for the project. The HMMP specifies which sites are to be included in the monitoring plan for the Hay Ranch Project, how often those sites will be monitored, the types of data to be collected, and the procedures for presenting the monitoring data to Inyo County.

The goal of the HMMP is to prevent potential off-site impacts of the Hay Ranch Project on groundwater and surface water users in Rose Valley. The HMMP is designed to monitor changes in groundwater levels throughout Rose Valley and compare the observed changes to groundwater-model predicted changes in order to predict and prevent potential impacts related to project pumping. The HMMP is broken into four phases: Phase 1 is Monitoring System Setup and Supplemental Data Collection; Phase 2 is Startup Monitoring and Reporting; Phase 3 is Model Recalibration and Redefinition of Pumping Rates and Durations; and Phase 4 is Ongoing Monitoring, Mitigation and Reporting.

In 2009, Phase 1 work was conducted by COC, TEAM and ICWD. On December 25, 2009 Phase 2 began with initiation of project pumping from the Hay Ranch South Well. In April 2010, work on Phase 3: Model Recalibration and Redefinition of Pumping Rates and Duration was initiated

with ICWD retaining Daniel B. Stephens & Associates (DBS&A). Phase 3 work included groundwater model recalibration based on Phase 1 data and also on Phase 2 data collected at project monitoring points from December 2009 through September 2010. In January 2011, DBS&A submitted its “Revised Groundwater Flow Model and Predictive Simulation Results, Coso Operating Company Hay Ranch Water Extraction Delivery System Conditional Use Permit (CUP 2007-003).” Based on results of the groundwater model recalibration, on April 1, 2011 ICWD issued an “Addendum to the HMMP for CUP#2007-003/Coso Operating Company, LLC” (2011 ICWD Addendum). This addendum set revised project pumping rates, durations, Trigger Levels and Maximum Acceptable Drawdowns for the Hay Ranch Project. With the 2011 ICWD Addendum, the project entered Phase 4: Ongoing Monitoring, Mitigation and Reporting. During Third Quarter 2013, DBS&A and ICWD conducted additional Phase 3 work resulting in new project pumping rates, pumping duration, groundwater Triggers Levels and Maximum Acceptable Drawdowns for project monitoring points as formalized in the August 30, 2013 Letter to Coso Operating Company.

In October 2013, COC paid for a proactive mitigation event at the Dunmovin well to install a new pump at greater depth in the existing domestic well. Because of the new in-well infrastructure associated with this event, groundwater sampling at Dunmovin was discontinued.

During Second Quarter 2014, DBS&A and ICWD conducted additional Phase 3 work resulting in new project pumping rates, pumping duration, groundwater Triggers Levels and Maximum Acceptable Drawdowns for project monitoring points, as described in the June 27, 2014 ICWD Letter to Coso Operating Company.

In First Quarter 2015, at the request of COC, and in association with ICWD, TEAM conducted a Pressure Transducer Assessment which reviewed the operational status and necessity of the numerous pressure transducers currently installed in the monitoring system. As of January 2015, the project was in its seventh year of monitoring. Sections 3.3.1 and 3.3.3 of the project’s HMMP discuss ongoing data collection procedures during Phase 4, and allow for minor changes to the monitoring plan provided those changes do not reduce the efficacy of the monitoring system. Based on the HMMP’s stipulations and by reviewing the existing database, TEAM identified several pressure transducers deployed in the monitoring system that no longer provided critical data for the project. Therefore, pressure transducers in the following wells will not be repaired or replaced as they reach the end of their serviceable life: HR 1C, HR 2C, Coso Junction Ranch, Davis Ranch Flow, Red Hill, 18-28, LLR Dock and LLR Hotel wells. These wells will continue to have monthly manual depth-to-water reads taken. As of the Fourth Quarter 2016, transducers have been removed from HR 1C, HR 2C, Coso Junction Ranch, Davis Ranch Flow, 18-28, LLR Dock and LLR Hotel wells.

In the Second Quarter 2016, COC requested to be allowed to pump up to 50 AF of water from the original 1,614 AFY they were allotted for July 1, 2015 to June 30, 2016 under CUP #2007-03. In a June 20, 2016 letter, the ICWD outlined their assessment of COC’s request for an extension of the pumping period and allowed for COC to pump the volume remaining of the 1,614 AF that was allotted for July 1, 2015 to June 30, 2016. The letter also stated that COC pumping totals were not to exceed 1,614 AF from July 1, 2015 to September 30, 2016 and trigger and maximum acceptable drawdown levels were to remain in force and unchanged from the June 27, 2014 model recalibration values.

During the period of September 2016 through May 2017, COC ceased export and entered into a water recovery phase. Groundwater level monitoring continued in Rose Valley during this period to track changes in groundwater levels (both recovery and/or decline) and to continue to monitor the Little Lake system.

In mid-2017, re-evaluation of pumping rates based on recalibration of the model, was conducted by DBS&A. A new pumping rate, which is not to exceed 1,611 acre-feet annually beginning on June 1, 2017, was approved in ICWD's July 27, 2017 letter to COC regarding Conditional Use Permit #2007-003/Coso. Revised Maximum Acceptable Drawdown and Drawdown at Cessation of Pumping values were provided in the DBS&A report titled "Third Updated Groundwater Flow Model and Predictive Simulation Results, Coso Operating Company, Hay Ranch Water Extraction and Delivery System" dated August 24, 2017. These Drawdown at Cessation of Pumping values were confirmed by ICWD to be the new Trigger Levels effective June 1, 2017.

3.0 PHASE 1: MONITORING AND REPORTING

The purpose of the Phase 1 Monitoring and Reporting period was to install the hydrologic monitoring system in Rose Valley and collect background data to establish prevailing hydrologic conditions prior to any potential impacts caused by Phase 2 and Phase 4 project implementation. From May to December 2009, 30 monitoring points were completed in Rose Valley from the Enchanted Village area in the north to the Little Lake Gap area in the south (Figure 1). These monitoring points include 25 wells and five surface water measuring points. Data logging pressure transducers were installed in 18 wells and five surface water measuring points to record hourly changes in water levels.

During Phase 1, two clusters of monitoring wells were completed on the Hay Ranch Property near the Hay Ranch South Well (the Hay Ranch Cluster 1 and 2 Wells). An additional monitoring well was completed north of the Red Hill Cinder Cone. Surface flow measuring devices (flumes) were installed at Davis Ranch and Little Lake Ranch (LLR). The Stilling Well was installed in the north end of Little Lake to measure lake level (stage).

Access agreements were finalized between COC and Rose Valley land owners to collect hydrologic data at numerous points in Rose Valley. Security systems were installed at Rose Valley monitoring points where necessary. Monitoring points were surveyed for northing, easting and elevation data.

Also during Phase 1, monthly field events were conducted to collect DTW and surface flow data from Rose Valley monitoring points. Background hydrologic data was collected from May to December 2009, and a data processing and transfer system was established between TEAM and ICWD. Monthly data packages, update letters and groundwater and surface flow hydrographs were produced. At least six months of groundwater elevation data was collected from wells specified by the HMMP to be used as “Trigger Wells” in the monitoring system.

3.1 ROSE VALLEY MONITORING POINTS

The hydrologic monitoring points throughout Rose Valley vary from active supply wells, to newly constructed monitoring wells, to inactive/former supply wells, to a hand-pumped campground well. Monitoring point locations range from the Enchanted Village area in the north to the Little Lake Hotel Well in the south, and from the Lego Well in the east to the Davis Ranch Wells in the west. Monitoring locations are on private and/or gated property as well as open, remote areas in Rose Valley. Some wells are locked in structures or behind gates, some have locked construction job boxes installed over the casings, and others have security installed on or around the well casing itself. Well owners include private individuals, the U.S. Navy, the Bureau of Land Management (BLM), the Los Angeles Department of Water and Power (LADWP), and Coso Operating Company. A summary table is included in this report (Table 1) which standardizes the names of the Rose Valley monitoring points and provides a reference to the names used in the HMMP for each monitoring point.

Important features of Rose Valley monitoring wells are as follows:

The Hay Ranch Cluster Wells feature shallow (1A and 2A), intermediate (1C and 2C) and deep (1B and 2B) screened intervals at each location to provide enhanced groundwater and upper aquifer data. These cluster wells provide data on groundwater drawdown on the Hay Ranch property itself.

With their specific screened intervals, each cluster grouping also has the potential to provide additional information on groundwater drawdown at specific depths. This data can be assessed to deduce upper aquifer parameters such as hydraulic conductivity and specific yield.

The Enchanted Village and Dunmovin Wells are active domestic supply wells. The Coso Junction Store #1 Well is located 20 yards north of an active business supply well: Coso Junction Store #2 Well. The Fossil Falls Well is a hand-operated well that supplies water for campers. At these locations, data collection procedures are in place to recognize and minimize the effects of in-well pumping. However, DTW readings from these wells can potentially be affected by significant, recent pumping of these wells.

The Cal Pumice, Coso Junction Ranch, Lego, G-36, Red Hill, 18-28 and Cinder Road Wells are not actively pumped wells, and are currently used for groundwater elevation monitoring only.

3.2 PORTUGUESE BENCH MONITORING POINTS

On Portuguese Bench to the west of US 395, there are three monitoring points located at the Davis Ranch. Two of the monitoring points are supply wells for the property: Davis Ranch North and South Wells, respectively. A third monitoring point, Davis Ranch South Flow, captures outflow from the Davis Ranch South Well.

Davis Ranch North and South Wells are located just below ground surface and are artesian at the top of each well casing. Groundwater from these two wells flows into PVC supply pipes for use at Davis Ranch. At the Davis Ranch North Well, water from the PVC pipe flows downhill into a complicated, gravity-powered water-delivery system. Water from this North Well is used for domestic consumption and irrigation. At the Davis Ranch South Well, since July 2015, water is actively pumped (solar pump) from the well for domestic consumption or as water supply for a pond. As a result of pumping, the correlation of groundwater levels to the pressure transducer measurements in the Davis Ranch South Well may be inaccurate.

At the Davis Ranch North and South Wells, pressure transducers have been installed to record well head levels. A small change in head in these wells (e.g. hundredths of a foot) will result in increased or decreased flow. A flow metering system consisting of a trapezoidal flume and stilling well with a data-logging pressure transducer was also installed (Davis Ranch South Flow) in the PVC outflow pipe.

In July 2015, a water supply pump was installed in the Davis Ranch South Well diverting water either to the pond or a holding tank. Monthly manual flow measurements are no longer recorded at the Davis Ranch South Flow flume as the data is no longer required by the ICWD.

3.3 LITTLE LAKE RANCH MONITORING POINTS

The Little Lake Ranch (LLR) area of Rose Valley (Figure 2) extends northwards to the mouth of the Fossil Falls Canyon, east along the volcanic scarp, west to US 395 with some property on the west side of the highway, and south through Little Lake Gap into the lower Little Lake area. As currently understood, Little Lake is fed by groundwater springs; there is no surface water flow into the lake. The surface elevation of Little Lake is controlled by a pair of weirs located in the lake's southwest corner. From these weirs a system of trenches moves surface water from Little Lake south to Pond 1 and Pond 2. Surface water exiting the Little Lake Weirs flows southeast via a

trench system toward Pond 1. Coso Springs, located to the northeast of Pond 1, provides surface water to Pond 1. The Siphon Well, located between the Little Lake Weirs and Pond 1, is a siphon well which provides additional surface flow via an outlet pipe to Pond 2. Trenches connect surface flow between Little Lake Weir, Coso Springs, Pond 1 and Pond 2. These trenches ultimately converge, and all surface water exiting the property flows through the North Culvert, located south of Pond 2, and through the Little Lake Gap area where it can be diverted by LLR staff to various ponds and irrigation trenches in the lower Little Lake area for growth of avian forage.

At the northeast end of the property is the LLR North Well. The LLR North Well is approximately 0.75 miles north of Little Lake and has no pumping infrastructure installed. Located to the southwest of LLR North Well is the LLR 395 Well. This is the primary groundwater supply well for the property. To the southeast is the LLR Ranch House Well. This is a reserve groundwater supply well that is also pumped for irrigation purposes. The LLR Dock Well is located approximately 100 feet northwest of Little Lake itself north of the Boat House, and has a gasoline-engine powered pumping system in place that is rarely used. The LLR Stilling Well is located southeast of the Boat House in the north end of Little Lake, and measures the water level (stage) of the lake.

The Little Lake surface level can be manually controlled by two weirs located at the southwest corner of the lake during certain times of the year. These concrete weirs have a slat system in place and a pair of three-inch diameter holes which can be plugged to retain water, or opened to release water. Surface water flowing from the Little Lake weir trench system flows through the LLR Lake Outflow flume and then is diverted into the northwest corner of Pond 1. Water from Coso Springs flows through the LLR Coso Springs Flow flume and then enters the northeast corner of Pond 1. Water leaves Pond 1 at a concrete weir in the southwest corner, and the pond's surface level can be controlled by a slat system at this weir. Water from Pond 1 flows by trench to the northwest corner of Pond 2. The LLR Siphon Well draws groundwater to the surface via a siphon pipe that discharges into Pond 2. Pond 2 has a concrete weir in the west corner and the pond's surface level can be controlled by a slat system. Water flows from Pond 2 into a trench system that runs south through the LLR North Culvert Flow flume. LLR North Culvert Flow captures surface flow from Little Lake, Coso Springs, Ponds 1 and 2, and the Siphon Well.

The LLR Hotel Well is located west of US 395 and south of Little Lake. It is a seasonally artesian well which is not directly connected to the LLR surface water transport system.

The LLR surface water system is managed by LLR staff to direct water to parts of the property as needed for wildlife and vegetation management. A typical water management practice by LLR staff can have the following effects, for example:

In order to supply water to the lower Little Lake area, boards may be removed from the weirs at Little Lake, Pond 1 and Pond 2. Water will flow from Little Lake to the south. The resulting surface water level decline in Little Lake can be measured at the LLR Stilling Well. The LLR Lake Outflow flume will register an increase in flow. Outflow from Little Lake, Pond 1 and Pond 2, will register as increased flow at LLR North Culvert Flow. When the boards are replaced at Little Lake, at Pond 1 and at Pond 2, lake and pond levels will slowly rise. Flows will decrease at LLR Lake Outflow and LLR North Culvert Flow. Throughout this water movement event, flow from Coso Springs and the Siphon Well (if actively producing groundwater) will continue to supply water to

the Ponds and, once the water levels in the Ponds have recovered, flow through North Culvert Flow.

In addition to active water management by LLR staff, wind and weather events can cause wave action that produces flow over the Little Lake Weirs. Also, if groundwater flow into Little Lake exceeds losses due to percolation and evapotranspiration, Little Lake surface level will rise, causing overflow at the lake weirs.

A spike in the LLR Lake Outflow hydrograph is typically indicative of water movement (removal of boards at the Little Lake Weirs) by LLR staff. After a time lag, increased outflow from Little Lake will also cause a spike in the LLR North Culvert Flow. A spike in the LLR North Culvert may also be caused by removal of boards at Pond 1 or 2; when only Pond boards are removed, the LLR Lake Outflow flume will not record increased flow, but the LLR North Culvert Flow will record a flow spike. Wind or weather events will cause a less dramatic increase in Lake Outflow and North Culvert Flow readings.

3.4 SUPPLEMENTAL DATA COLLECTION

In addition to setting up the monitoring system and conducting monthly DTW and surface flow measurements, supplemental data was collected during the Phase 1 period.

In September 2009, a field event was conducted to evaluate groundwater levels beneath Little Lake. Temporary drive-point piezometers were installed and then removed at four locations around Little Lake to depths of four or more feet beneath the lake bottom. At all four locations, the measurements indicated a downward hydraulic gradient from Little Lake to groundwater beneath Little Lake.

A bathymetric survey was conducted in August 2009 at 21 points across Little Lake. Depth to bottom was measured and location was recorded using a hand held GPS unit. The maximum depth measured was 4.8 feet in the central section of the lake, with average depths between 3.0-4.5 feet throughout most of the lake. The lake level was approximately one foot below the top of the east weir when this bathymetry survey was conducted.

In October and December of 2009, groundwater samples were collected from three wells: Hay Ranch South, Coso Junction Store #2, and LLR North wells. These groundwater samples were lab-analyzed for Total Dissolved Solids (TDS) to establish background water quality conditions. During sample collection, a hand-held field instrument recorded specific conductivity and computed TDS data. In addition to groundwater sample collection, pressure transducers in the Hay Ranch Cluster (1A-1C and 2A-2C), Red Hill, LLR North, LLR Dock and LLR Stilling wells recorded specific conductivity and computed TDS values hourly.

Data gaps regarding various details of monitoring points were closed where possible. In active supply wells which also serve as monitoring wells, total depth and pump depths were collected from owners. Precipitation gauges were identified in Rose Valley and in the Sierra to the north and southwest of Rose Valley to provide additional information for future groundwater modeling.

3.5 BASELINE GROUNDWATER LEVELS

At the conclusion of Phase 1, data from 2002 through 2009 was used to establish preliminary baseline groundwater elevations (GWEs). Steve Brooks, Professional Geologist and Principal

Hydrogeologist/Senior Project Manager of Schlumberger Water Services, conducted a Rose Valley Baseline Water Level Analysis. ICWD accepted these preliminary baseline levels in January 2010, as summarized in Table 3.

4.0 PHASE 4: ONGOING MONITORING, MITIGATION AND REPORTING

The Hay Ranch Project is currently in “Phase 4 Ongoing Monitoring, Mitigation and Reporting”, as outlined in the HMMP. Phase 2 and 3 were conducted from 2009 through 2013, as described above. The objective of Phase 4 is to document the ongoing response of the Rose Valley aquifer to pumping at the Hay Ranch and to monitor later-stage groundwater and potential Little Lake level changes as pumping continues and for recovery monitoring. Monthly groundwater and surface water data continues to be collected from project monitoring points in Rose Valley.

4.1 MONITORING AND REPORTING

During Fourth Quarter 2017, monthly data collection occurred at monitoring points in Rose Valley.

As required by the project’s HMMP, GWE drawdown Trigger Levels have been established for certain Rose Valley monitoring wells. Revised Maximum Acceptable Drawdown and Drawdown at Cessation of Pumping values were provided in the DBS&A report titled “Third Updated Groundwater Flow Model and Predictive Simulation Results, Coso Operating Company, Hay Ranch Water Extraction and Delivery System” dated August 24, 2017. Trigger Levels were set based on the maximum annual groundwater extraction rate of 1,611 acre-feet per year (APY) effective June 1, 2017 to May 31, 2019.

Based on the manual depth to water (DTW) data collected by TEAM in October 2017, the water levels at the Little Lake Ranch North Well (LLR North) was measured in exceedance of the revised Trigger Level.

During the Fourth Quarter 2017, groundwater elevations were measured to be within Trigger Levels at all other Hay Ranch Project monitoring wells which have baseline and Trigger Levels established. There were no Maximum Acceptable Drawdowns exceeded in project wells during the Fourth Quarter 2017, or throughout the project thus far.

Table 3 of this report compares December 2017 GWEs with pre-pumping baseline GWEs and the Trigger Levels and Maximum Acceptable Drawdowns Levels” for Hay Ranch Project monitoring points established in the DBS&A report titled “Third Updated Groundwater Flow Model and Predictive Simulation Results, Coso Operating Company, Hay Ranch Water Extraction and Delivery System” dated August 24, 2017.

Hydrographs from the latest Fourth Quarter 2017 monthly field event were submitted to ICWD. These monthly hydrographs featuring the full suite of Rose Valley monitoring points were uploaded to the ICWD website: www.inyowater.org. These hydrographs along with monthly letter reports can be viewed on-line at <http://www.inyowater.org/projects/groundwater/coso-hay-ranch-project/>. The December 2017 monthly hydrographs are included in this report as Appendix A.

Monthly readings from the Hay Ranch North and South Production Well totalizers, documenting groundwater extraction amounts, are included in this report as Table 2. The combined groundwater extraction amounts from these two production wells represent the total groundwater extracted by the Hay Ranch Project.

Hydrographs which present various Rose Valley monitoring points comparing GWEs to Hay Ranch Project pumping amounts over time are included in this report as Figures 3 through 10.

Groundwater elevations, in feet above mean sea level, are listed on the left axis. Hay Ranch Project average daily pumping amounts, in acre-feet per day, are listed on the right axis in inverse order. In these figures, Rose Valley monitoring points have been grouped along similar GWE ranges.

A hydrograph which compares groundwater and surface water elevations in the Little Lake area to Hay Ranch Project pumping amounts over time is included in this report as Figure 11. Groundwater and surface water elevations at the LLR Dock, LRR Stilling Well (lake surface level) and LLR Hotel Well are listed, in feet above mean sea level, on the left axis. Hay Ranch Project average daily pumping amounts, in acre-feet per day, are listed on the right axis in inverse order.

A hydrograph which compares groundwater and surface water elevations in the immediate vicinity of Little Lake to LLR Lake Outflow amounts over time is included in this report as Figure 12. Groundwater and surface water elevations at the LLR Dock and LLR Stilling Well (Little Lake surface level) are listed, in feet above mean sea level, on the left axis. Surface water outflow from Little Lake, captured by the LLR Lake Outflow flume in cubic feet per second, is listed on the right axis in inverse order.

A hydrograph which compares surface water flows in the Little Lake Ranch area to Hay Ranch Project pumping rates over time is also included in this report as Figure 13. Surface water flows from Lake Outflow, Coso Springs Flow and North Culvert Flow are listed on the left axis, in cubic feet per second. Hay Ranch Project average daily pumping amounts, in acre-feet per day, are listed on the right axis in inverse order. As noted in Section 3.3, surface flow captured by the North Culvert Flow flume represents an accumulation of surface flows from Little Lake, Coso Springs and the Siphon Well flow.

Groundwater quality graphs are presented in Figures 14 through 16, comparing TDS levels in Rose Valley monitoring wells with Hay Ranch Project pumping amounts over time. This data is being collected by the in-well, data-logging transducers. The transducers are converting hourly specific conductivity measurements to computed TDS values. TDS values, in parts per million (equivalent to mg/L) are listed on the left axis. Hay Ranch Project average daily pumping rates are listed on the right axis, in average acre-feet per day.

A hydrograph which compares the actual amount of groundwater pumped from the Hay Ranch Project in acre-feet (AF) with the maximum allowable amount is included in this report as Figure 17. The total amount of groundwater extracted from the Hay Ranch property from December 25, 2009 to December 13, 2017 was approximately 17,104 AF, including on site use. The maximum allowable pumping amount in Figure 17 assumes a pumping rate of approximately 3,000 acre-feet per year (AFY) for December 25, 2009 through December 31, 2010, a rate of approximately 4,839 AFY from January 1, 2011 through August 30, 2013, a rate of 3,040 AFY from September 1, 2013 to June 30, 2014, a rate of approximately 1,614 AFY from July 1, 2014 through June 30, 2016 and a rate of 1611 AFY from June 1, 2017 through May 31, 2019. The pumping rates on Figure 17 represent the maximum allowable pumping amounts for the 2010-2017 periods, respectively. Coso Operating Company has pumped less than the maximum allowable amounts throughout the project.

Tabular data, in digital format, of groundwater elevations and flow amounts from Rose Valley monitoring points can be obtained by contacting ICWD in writing at PO Box 337, 135 South Jackson St., Independence, CA, 93526 or by phone at (760) 878-0001.

4.2 GROUNDWATER QUALITY

As part of the quarterly monitoring activities specified in the HMMP, groundwater samples were collected from two wells in the Fourth Quarter 2017. On December 14, 2017 groundwater samples were collected from the Coso Junction Store #2 (CJS#2) and Little Lake Ranch North Well (LLR North). These groundwater samples were analyzed for TDS by TestAmerica, Inc., a California-Certified Analytical Laboratory. Prior to sample collection, groundwater was purged from each well until groundwater physical parameters stabilized, as monitored by a Horiba U52 hand-held unit.

At CJS#2, the groundwater sample was collected from the groundwater holding tank located 20 yards north of this active supply well. Water was purged from the holding tank's sample port until groundwater physical parameters stabilized; approximately 15 gallons of water were purged. The CJS#2 groundwater sample was collected from the holding tank's sample port on December 14, 2017 at a time of 1:57 p.m. The laboratory analytical result from CJS was 510 mg/L of TDS. The previous laboratory TDS value for CJS#2 from Third Quarter 2017 was 530 mg/L. The physical parameters, as measured by a Horiba U52 unit, of the groundwater from CJS#2 holding tank immediately prior to sampling were as follows: time 1:55 p.m.; temperature 18.4° C; TDS 559 mg/L.

At LLR North, approximately 8 gallons of groundwater were purged from the well preceding sample collection. Well purging was conducted with a submersible pump and generally following EPA Low-flow methodology. The groundwater sample was collected on December 14, 2017 at 12:10 a.m. The laboratory analytical result from LLR North was 590 mg/L of TDS. The previous laboratory TDS value for LLR North from Third Quarter 2017 was 560 mg/L. The physical parameters, as measured by a Horiba U52 unit, of the groundwater from LLR North immediately prior to sampling with a portable submersible pump were as follows: time 12:09 a.m.; temperature 22.0° C; TDS 690 mg/L.

At CJS#2 and LLR North wells, the TDS values from the Fourth Quarter 2017 groundwater sampling events were below "Threshold Requiring Action" values as specified in Table 3-2 of the HMMP (1,500 mg/L for Coso Junction Store #2 and Little Lake Ranch North, and 2,000 mg/L for Hay Ranch South Well). The Hay Ranch South Well was not sampled as it was not operating during any Fourth Quarter 2017 monitoring event.

4.3 DATA COLLECTION AND PROCESSING

A protocol for measuring and sampling the Rose Valley monitoring sites has been defined and instituted by TEAM with the oversight of ICWD. Transducer hanging points, flow and DTW measuring points have been marked, surveyed and standardized (where feasible). Groundwater levels are measured by lowering a sounding probe into a well and obtaining two successive readings that agree to within 0.01 feet. These measurements are referenced to a mark at the top of the casing. The results of the measurements are then recorded on field sheets.

Field sheets are copied and archived at TEAM. Data from these sheets is input into the project database program and checked against the field sheets. Data from the Coso database is then graphed in flow and groundwater hydrographs. TEAM performs internal quality control and quality assurance checks on this data and then transmits the draft hydrographs to ICWD. After

review and/or discussion with ICWD, the draft hydrographs are finalized and uploaded to the ICWD server for public posting on www.inyowater.org.

4.4 OPERATIONAL NOTES

The transducer for the Davis Ranch South well became inoperable and was removed from the monitoring well in October. The Cinder Road well was damaged by vandals in October. The transducer was missing and a blockage in the well prevented water level collection. COC personnel cleared the blockage, and water levels were collected in subsequent months, the transducer was not replaced. The transducer for the Lego well became inoperable and was removed from the monitoring well in November. As directed by ICWD staff, it was not replaced, however monthly depth to water readings will continue to be collected. There were no other significant operational issues observed during the reporting period.

4.5 ADDITIONAL OBSERVATIONS

During Fourth Quarter 2017, LLR continued seasonal water management on the LLR property which included primarily a “water holding” pattern where the lake weirs were boarded up and less flow was released from the lake itself (see Figures 12 and 13).

Precipitation data collected at the South Haiwee Reservoir weather station monitored by LADWP and presented by the National Weather Service in conjunction with the California-Nevada River Forecast Center is as follows: for water year 2017-18 (October 2017 through September 2018) the Haiwee station recorded 0.06 inches of precipitation, 0.8 % of water year long-term average as of December 31, 2017. Prior to the 2017-18 water year, for the seven complete water years during project pumping (2009-10 to 2016-17), precipitation at the South Haiwee station has been 111%, 114%, 41%, 11%, 38%, 54%, 47% and 169%, of the long-term average, respectively.

5.0 GENERAL CONDITIONS

This report has been prepared according to generally accepted standards of environmental practice at the time this assessment was performed. TEAM Engineering & Management, Inc. (TEAM) does not assume responsibility for conditions that did not come to its attention or for conditions not generally recognized as environmentally acceptable at the time this report was prepared. Professional judgments contained in this report are based upon our education and experiences on similar projects. Services performed for this project by TEAM are in accordance with professional standards for surface and groundwater data collection, no guarantees are either expressed or implied.

TABLES

TABLE 1
HAY RANCH PROJECT MONITORING POINT SUMMARY

| Well ID | Well Name | Hay Ranch Project FEIR HMMP reference names from HMMP Tables 3-1 and 3-2 | Monitoring Role | Current Well Use | Transducer Installed | Data Logging Frequency |
|---------|-------------------------|--|--------------------------|-------------------------------------|----------------------|------------------------|
| RV-10 | Enchanted Village | Wells located west of Haiwee Reservoir | Observation | Active Supply | No | NA |
| RV-20 | LADWP V816 | LADWP V816 | Observation | Inactive | No | NA |
| RV-30 | Cal Pumice | Pumice Mine Well | Observation ¹ | Inactive | No | NA |
| RV-40 | Dunmovin | Same or Dunmovin Area well | Inactive | Active Supply | No | NA |
| RV-50 | Hay Ranch North | Hay Ranch North | Production/GWQ | Production | Flow Meter | NA |
| RV-60 | HR 1A | Six New Hay Ranch Observation wells | Observation | Inactive | Yes | Hourly |
| RV-61 | HR 1B | Six New Hay Ranch Observation wells | Observation | Inactive | Yes | Hourly |
| RV-62 | HR 1C | Six New Hay Ranch Observation wells | Observation | Inactive | No | NA |
| RV-70 | Hay Ranch South | Hay Ranch South | Production/GWQ | Production | Flow Meter | NA |
| RV-80 | HR 2A | Six New Hay Ranch Observation wells | Trigger ² | Inactive | Yes | Hourly |
| RV-81 | HR 2B | Six New Hay Ranch Observation wells | Observation | Inactive | Yes | Hourly |
| RV-82 | HR 2C | Six New Hay Ranch Observation wells | Observation | Inactive | No | NA |
| RV-90 | Coso Jct Ranch | Coso Ranch North | Trigger | Inactive | No | NA |
| RV-100 | Coso Jct Store #1 | Coso Junction #1 | Trigger/GWQ (#2) | Inactive/Active Supply ³ | Yes | Hourly |
| RV-110 | Davis Ranch North | Not Mentioned | Observation | Artesian | Yes | Hourly |
| RV-111 | Davis Ranch South | Not Mentioned | Observation | Artesian | No | NA |
| RV-112 | Davis Ranch South Flow | Not Mentioned | Observation | Flume | No | NA |
| RV-120 | Red Hill (BLM) | New well located between Coso Jnc and Cinder Road Red Hill | Trigger ² | Inactive | Yes | Hourly |
| RV-130 | Well G36 | Well G-36 or Navy G-36 Well | Trigger | Inactive | No | NA |
| RV-140 | Lego | Same or Navy Lego Well | Trigger | Inactive | No | NA |
| RV-150 | Cinder Road | Cinder Road, Red Hill | Trigger | Inactive | No | NA |
| RV-160 | Well 18-28 GTH | Well 18-28 or Navy 18-28 Well | Trigger | Inactive | No | NA |
| RV-170 | Fossil Falls Campground | Fossil Falls Campground | Observation | Active Supply | No | NA |
| RV-180 | LLR North | Little Lake Ranch North Well | Trigger/GWQ | Inactive | Yes | Hourly |
| RV-190 | LLR 395 | Little Lake Major Operational Changes | Observation | Active Supply | No | NA |
| RV-200 | LLR Ranch | Little Lake Major Operational Changes | Observation | Active Supply | No | NA |
| RV-210 | LLR Dock | Little Lake North Dock Well | Observation | Inactive | No | NA |
| RV-220 | LLR Lake Stilling | Little Lake | Observation | Actively Managed | Yes | Hourly |
| RV-230 | LLR Lake Outflow | Little Lake Weir | Observation | Actively Managed Flume | Yes | Hourly |
| RV-240 | LLR Coso Springs | Coso Springs | Observation | Flume | Yes | Hourly |
| RV-245 | LLR North Culvert | Little Lake North Culvert Weir | Observation | Actively Managed Flume | Yes | Hourly |
| RV-250 | LLR Siphon | Pond P1 Siphon Well ⁴ | Observation | Active Siphon | No | NA |
| RV-260 | LLR Hotel | Little Lake Hotel Well | Observation | Inactive | No | NA |

GWQ- Groundwater Quality monitoring well

1: Due to an anomalous drop in groundwater elevation in December 2009 before Hay Ranch Project pumping started, Cal Pumice Well was removed from project Trigger use by ICWD on April 1, 2011.

2: Trigger Levels for RV-80 and RV-120 were not set in HMMP Table 3-1. However, preliminary baseline levels were set, and Trigger levels were set in ICWD's April 1, 2011 Addendum.

3: RV-100 Coso Jct Store #1 Well is an inactive well located approximately 20 yards north of Coso Jct Store #2 well which is an active supply well where groundwater quality is being recorded.

4: RV-250 LLR Siphon Well supplies water directly to LLR Pond 2, not LLR Pond 1 as erroneously stated in the HMMP.

TABLE 2
HAY RANCH PROJECT GROUNDWATER PUMPING TO DATE

| Hay Ranch North and South Well Groundwater Extraction Amounts | | | |
|---|--------------------------------------|--|--------|
| Time period | Groundwater Production Well | Groundwater Extracted (Gallons) (Acre Feet) | |
| Date: 12/25/09 to 12/13/17 | Hay Ranch South Well Project Totals: | 2,037,805,530 | 6,254 |
| Date: 9/13/17 to 12/13/17 | Hay Ranch South Well Recent Period: | 351,747 | 1 |
| Date: 12/25/09 to 12/13/17 | Hay Ranch North Well Project Totals: | 3,535,397,654 | 10,850 |
| Date: 9/13/17 to 12/13/17 | Hay Ranch North Well Recent Period: | 129,944,715 | 399 |

| Total Groundwater Extraction Amounts at Hay Ranch Property (Combined Totals of Hay Ranch North and South Wells) | | | | | | | | | |
|---|------------|--------------------|---------------------------------------|---|----------------|---------------------------------|-----------------------------|---|------|
| Date Numeric | Date Short | Total Days Elapsed | Total Gallons Pumped Since 12/25/2009 | Total Acre Feet Pumped Since 12/25/2009 | Days in Period | Total Gallons Pumped for period | Acre Feet Pumped for period | Average Daily Acre Feet Pumped for period | |
| 40172 | 12/25/09 | 0 | - | 0 | 0 | 0 | 0 | 0 | 0 |
| 40196 | 01/18/10 | 24.5 | 24,009,000 | 73.7 | 24 | 5,908,000 | 18.1 | 2.6 | 2.6 |
| 40254 | 03/17/10 | 82.5 | 120,024,000 | 368.3 | 58 | 5,786,000 | 17.8 | 8.9 | 8.9 |
| 40312 | 05/14/10 | 140.5 | 248,524,000 | 762.7 | 58 | 57,698,000 | 177.1 | 5.7 | 5.7 |
| 40380 | 07/21/10 | 208.5 | 384,977,000 | 1181.5 | 68 | 59,458,000 | 182.5 | 5.5 | 5.5 |
| 40436 | 09/15/10 | 264.5 | 569,767,000 | 1748.6 | 56 | 108,283,000 | 332.3 | 11.9 | 11.9 |
| 40499 | 11/17/10 | 327.5 | 843,610,000 | 2588.9 | 63 | 123,692,000 | 379.6 | 13.6 | 13.6 |
| 40535 | 12/23/10 | 363.5 | 969,708,000 | 2975.9 | 36 | 27,212,000 | 83.5 | 10.4 | 10.4 |
| 40557 | 1/14/11 | 385.5 | 1,051,742,000 | 3227.7 | 22.0 | 82,034,000 | 251.8 | 11.4 | 11.4 |
| 40618 | 3/16/11 | 446.0 | 1,297,555,396 | 3982.1 | 61.0 | 245,813,396 | 754.4 | 12.4 | 12.4 |
| 40679 | 5/16/11 | 507.0 | 1,480,298,532 | 4542.9 | 61.0 | 182,743,136 | 560.8 | 9.2 | 9.2 |
| 40744 | 7/20/11 | 572.0 | 1,718,358,135 | 5273.4 | 65.0 | 238,059,603 | 730.6 | 11.2 | 11.2 |
| 40808 | 9/22/11 | 636.0 | 1,913,288,042 | 5871.7 | 74.0 | 194,929,907 | 598.2 | 8.1 | 8.1 |
| 40863 | 11/16/11 | 691.0 | 2,107,009,325 | 6466.2 | 55.0 | 193,721,283 | 594.5 | 10.8 | 10.8 |
| 40909 | 1/1/12 | 737.0 | 2,244,015,454 | 6886.6 | 46.0 | 137,006,129 | 420.5 | 9.1 | 9.1 |
| 40926 | 1/18/12 | 754.0 | 2,294,961,279 | 7043.0 | 17.0 | 50,945,825 | 156.3 | 9.2 | 9.2 |
| 40954 | 2/15/12 | 782.0 | 2,379,615,567 | 7302.8 | 28.0 | 84,654,288 | 259.8 | 9.3 | 9.3 |
| 40982 | 3/14/12 | 810.0 | 2,464,852,032 | 7564.4 | 28.0 | 85,236,465 | 261.6 | 9.3 | 9.3 |
| 41017 | 4/18/12 | 845.0 | 2,568,756,136 | 7883.2 | 35.0 | 103,904,104 | 318.9 | 9.1 | 9.1 |
| 41047 | 5/18/12 | 875.0 | 2,648,936,175 | 8129.3 | 30.0 | 80,180,039 | 246.1 | 8.2 | 8.2 |
| 41073 | 6/13/12 | 901.0 | 2,711,863,226 | 8322.4 | 26.0 | 62,927,051 | 193.1 | 7.4 | 7.4 |
| 41101 | 7/11/12 | 929.0 | 2,777,902,728 | 8525.1 | 28.0 | 66,039,502 | 202.7 | 7.2 | 7.2 |
| 41136 | 8/15/12 | 964.0 | 2,863,864,296 | 8788.9 | 35.0 | 85,961,568 | 263.8 | 7.5 | 7.5 |
| 41172 | 9/20/12 | 1000.0 | 2,949,088,794 | 9050.4 | 36.0 | 85,224,498 | 261.5 | 7.3 | 7.3 |
| 41199 | 10/17/12 | 1027.0 | 3,021,454,950 | 9272.5 | 27.0 | 72,366,156 | 222.1 | 8.2 | 8.2 |
| 41227 | 11/14/12 | 1055.0 | 3,096,463,909 | 9502.7 | 28.0 | 75,008,959 | 230.2 | 8.2 | 8.2 |
| 41255 | 12/12/12 | 1083.0 | 3,172,187,028 | 9735.1 | 28.0 | 75,723,119 | 232.4 | 8.3 | 8.3 |
| 41290 | 1/16/13 | 1118.0 | 3,265,225,259 | 10020.6 | 35.0 | 93,038,231 | 285.5 | 8.2 | 8.2 |
| 41318 | 2/13/13 | 1146.0 | 3,342,527,748 | 10257.8 | 28.0 | 77,302,489 | 237.2 | 8.5 | 8.5 |
| 41346 | 3/13/13 | 1174.0 | 3,421,705,247 | 10500.8 | 28.0 | 79,177,499 | 243.0 | 8.7 | 8.7 |
| 41381 | 4/17/13 | 1209.0 | 3,517,213,337 | 10793.9 | 35.0 | 95,508,090 | 293.1 | 8.4 | 8.4 |
| 41409 | 5/15/13 | 1237.0 | 3,594,345,906 | 11030.6 | 28.0 | 77,132,569 | 236.7 | 8.5 | 8.5 |
| 41437 | 6/12/13 | 1265.0 | 3,672,013,949 | 11269.0 | 28.0 | 77,668,043 | 238.4 | 8.5 | 8.5 |
| 41472 | 7/17/13 | 1300.0 | 3,768,453,448 | 11565.0 | 35.0 | 96,439,499 | 296.0 | 8.5 | 8.5 |
| 41507 | 8/21/13 | 1335.0 | 3,864,718,242 | 11860.4 | 35.0 | 96,264,794 | 295.4 | 8.4 | 8.4 |
| 41535 | 9/18/13 | 1363.0 | 3,935,703,228 | 12078.2 | 28.0 | 70,984,986 | 217.8 | 7.8 | 7.8 |
| 41570 | 10/23/13 | 1398.0 | 4,014,592,733 | 12320.3 | 35.0 | 78,889,505 | 242.1 | 6.9 | 6.9 |
| 41598 | 11/20/13 | 1426.0 | 4,066,039,225 | 12478.2 | 28.0 | 51,446,492 | 157.9 | 5.6 | 5.6 |
| 41626 | 12/18/13 | 1454.0 | 4,106,672,296 | 12602.9 | 28.0 | 40,633,071 | 124.7 | 4.5 | 4.5 |
| 41663 | 1/24/14 | 1491.0 | 4,180,236,831 | 12767.3 | 37.0 | 53,564,535 | 164.4 | 4.4 | 4.4 |
| 41690 | 2/20/14 | 1518.0 | 4,199,109,084 | 12886.6 | 27.0 | 38,872,253 | 119.3 | 4.4 | 4.4 |
| 41717 | 3/19/14 | 1545.0 | 4,238,188,704 | 13006.5 | 27.0 | 39,079,620 | 119.9 | 4.4 | 4.4 |
| 41751 | 4/22/14 | 1579.0 | 4,287,133,798 | 13156.7 | 34.0 | 48,945,094 | 150.2 | 4.4 | 4.4 |
| 41780 | 5/21/14 | 1608.0 | 4,328,804,442 | 13284.6 | 29.0 | 41,670,644 | 127.9 | 4.4 | 4.4 |
| 41815 | 6/25/14 | 1643.0 | 4,379,288,623 | 13439.5 | 35.0 | 50,484,181 | 154.9 | 4.4 | 4.4 |
| 41843 | 7/23/14 | 1671.0 | 4,417,985,081 | 13558.3 | 28.0 | 38,696,458 | 118.8 | 4.2 | 4.2 |
| 41871 | 8/20/14 | 1699.0 | 4,458,949,864 | 13684.0 | 28.0 | 40,964,783 | 125.7 | 4.5 | 4.5 |
| 41899 | 9/17/14 | 1727.0 | 4,498,802,460 | 13806.3 | 28.0 | 39,852,596 | 122.3 | 4.4 | 4.4 |
| 41927 | 10/15/14 | 1755.0 | 4,539,112,035 | 13930.0 | 28.0 | 40,309,575 | 123.7 | 4.4 | 4.4 |
| 41955 | 11/12/14 | 1783.0 | 4,579,290,075 | 14053.3 | 28.0 | 40,178,040 | 123.3 | 4.4 | 4.4 |
| 41990 | 12/17/14 | 1818.0 | 4,629,762,924 | 14208.2 | 35.0 | 50,472,849 | 154.9 | 4.4 | 4.4 |
| 42025 | 1/21/15 | 1853.0 | 4,680,088,713 | 14362.7 | 35.0 | 50,325,789 | 154.4 | 4.4 | 4.4 |
| 42058 | 2/23/15 | 1886.0 | 4,727,695,937 | 14508.8 | 33.0 | 47,607,224 | 146.1 | 4.4 | 4.4 |
| 42081 | 3/18/15 | 1909.0 | 4,760,930,221 | 14610.8 | 23.0 | 33,234,284 | 102.0 | 4.4 | 4.4 |
| 42116 | 4/22/15 | 1944.0 | 4,811,310,841 | 14765.4 | 35.0 | 50,380,620 | 154.6 | 4.4 | 4.4 |
| 42144 | 5/20/15 | 1972.0 | 4,851,693,297 | 14889.3 | 28.0 | 40,382,456 | 123.9 | 4.4 | 4.4 |
| 42172 | 6/17/15 | 2000.0 | 4,892,229,845 | 15013.7 | 28.0 | 40,536,548 | 124.4 | 4.4 | 4.4 |
| 42194 | 7/9/15 | 2022.0 | 4,924,156,920 | 15111.7 | 22.0 | 31,927,075 | 98.0 | 4.5 | 4.5 |
| 42235 | 8/19/15 | 2063.0 | 4,983,281,487 | 15293.1 | 41.0 | 59,124,567 | 181.4 | 4.4 | 4.4 |
| 42263 | 9/16/15 | 2091.0 | 5,023,729,536 | 15417.3 | 28.0 | 40,448,049 | 124.1 | 4.4 | 4.4 |
| 42291 | 10/14/15 | 2119.0 | 5,063,572,723 | 15539.5 | 28.0 | 39,843,187 | 122.3 | 4.4 | 4.4 |
| 42326 | 11/18/15 | 2154.0 | 5,114,095,632 | 15694.6 | 35.0 | 50,522,909 | 155.0 | 4.4 | 4.4 |
| 42354 | 12/16/15 | 2182.0 | 5,154,295,108 | 15818.0 | 28.0 | 40,199,476 | 123.4 | 4.4 | 4.4 |
| 42382 | 1/13/16 | 2210.0 | 5,194,797,997 | 15942.2 | 28.0 | 40,502,889 | 124.3 | 4.4 | 4.4 |
| 42417 | 2/17/16 | 2245.0 | 5,244,454,914 | 16094.6 | 35.0 | 49,656,917 | 152.4 | 4.4 | 4.4 |
| 42445 | 3/16/16 | 2273.0 | 5,284,580,093 | 16217.8 | 28.0 | 40,125,179 | 123.1 | 4.4 | 4.4 |
| 42473 | 4/13/16 | 2301.0 | 5,325,136,484 | 16342.2 | 28.0 | 40,286,391 | 123.6 | 4.4 | 4.4 |
| 42501 | 5/11/16 | 2329.0 | 5,362,299,478 | 16456.3 | 28.0 | 37,162,994 | 114.0 | 4.1 | 4.1 |
| 42536 | 6/15/16 | 2364.0 | 5,364,510,242 | 16463.1 | 35.0 | 2,210,764 | 6.8 | 0.2 | 0.2 |
| 42571 | 7/20/16 | 2399.0 | 5,372,143,529 | 16486.5 | 35.0 | 7,633,287 | 23.4 | 0.7 | 0.7 |
| 42599 | 8/17/16 | 2427.0 | 5,377,181,550 | 16502.0 | 28.0 | 5,038,021 | 15.5 | 0.6 | 0.6 |
| 42634 | 9/21/16 | 2462.0 | 5,377,693,220 | 16503.5 | 35.0 | 511,670 | 1.6 | 0.0 | 0.0 |
| 42655 | 10/12/16 | 2483.0 | 5,377,705,716 | 16503.6 | 21.0 | 12,496 | 0.0 | 0.0 | 0.0 |
| 42690 | 11/16/16 | 2518.0 | 5,377,736,985 | 16503.7 | 35.0 | 31,269 | 0.1 | 0.0 | 0.0 |
| 42724 | 12/20/16 | 2552.0 | 5,377,918,844 | 16504.2 | 34.0 | 181,859 | 0.6 | 0.0 | 0.0 |
| 42753 | 1/18/17 | 2581.0 | 5,377,955,932 | 16504.3 | 29.0 | 37,088 | 0.1 | 0.0 | 0.0 |
| 42781 | 2/15/17 | 2609.0 | 5,378,018,362 | 16504.5 | 28.0 | 62,430 | 0.2 | 0.0 | 0.0 |
| 42809 | 3/15/17 | 2637.0 | 5,378,031,670 | 16504.6 | 28.0 | 13,308 | 0.0 | 0.0 | 0.0 |
| 42843 | 4/18/17 | 2671.0 | 5,378,105,877 | 16504.8 | 34.0 | 74,207 | 0.2 | 0.0 | 0.0 |
| 42872 | 5/17/17 | 2700.0 | 5,379,714,803 | 16509.7 | 29.0 | 1,608,926 | 4.9 | 0.2 | 0.2 |
| 42900 | 6/14/17 | 2728.0 | 5,381,019,294 | 16513.7 | 28.0 | 1,304,491 | 4.0 | 0.1 | 0.1 |
| 42928 | 7/12/17 | 2756.0 | 5,389,555,398 | 16539.9 | 28.0 | 8,536,104 | 26.2 | 2.0 | 2.0 |
| 42963 | 8/16/17 | 2791.0 | 5,407,934,741 | 16596.3 | 35.0 | 18,379,343 | 56.4 | 1.6 | 1.6 |
| 42991 | 9/13/17 | 2819.0 | 5,442,906,542 | 16703.7 | 28.0 | 34,971,801 | 107.4 | 3.8 | 3.8 |
| 43026 | 10/18/17 | 2854.0 | 5,493,383,152 | 16858.6 | 35.0 | 50,476,610 | 154.9 | 5.5 | 5.5 |
| 43054 | 11/15/17 | 2882.0 | 5,533,664,042 | 16982.2 | 28.0 | 40,280,890 | 123.6 | 4.4 | 4.4 |
| 43082 | 12/13/17 | 2910.0 | 5,573,203,184 | 17103.5 | 28.0 | 39,539,142 | 121.3 | 4.3 | 4.3 |

Notes:
Data based on manual reads by TEAM of the Hay Ranch North and South Well Totalizers and digital reads from Coso Operating Company.
Hay Ranch Project groundwater pumping was initiated on 12/25/09.

TABLE 3
HAY RANCH PROJECT GROUNDWATER BASELINES AND TRIGGER LEVELS
December 2017

| Well ID | Monitoring Point | Baseline GWE ¹ (feet amsl) | Recent Date of Measurement | Recent GWE (feet amsl) | Recent GWE Compared to Baseline (feet) | Trigger Level ³ (feet) | Recent GWE Compared to Trigger Level (feet) | Recent GWE Above Max DD ² (feet) |
|---------|-------------------|--|-------------------------------|-------------------------------|--|--|---|---|
| RV-80 | HR 2A | 3240.92 | 12/13/17 | 3232.48 | -8.44 | 16.9 | 8.46 | 9.16 |
| RV-90 | Coso Jct Ranch | 3230.65 | 12/13/17 | 3227.63 | -3.02 | 9.60 | 6.58 | 6.68 |
| RV-100 | Coso Jct Store #1 | 3227.59 | 12/13/17 | 3225.47 | -2.12 | 8.60 | 6.48 | 6.58 |
| RV-120 | Red Hill Well | 3200.66 | 12/13/17 | 3199.79 | -0.87 | 3.40 | 2.53 | 3.13 |
| RV-130 | G-36 | 3198.35 | 12/13/17 | 3197.19 | -1.16 | 2.70 | 1.54 | 2.44 |
| RV-140 | Lego | 3199.21 | 12/13/17 | 3198.15 | -1.06 | 1.30 | 0.24 | 1.64 |
| RV-150 | Cinder Road | 3186.92 | 12/13/17 (3) | 3185.90 | -1.02 | 1.50 | 0.48 | 1.38 |
| RV-160 | 18-28 GTH | 3187.67 | 12/13/17 | 3187.68 | 0.01 | 1.20 | 1.21 | 2.31 |
| RV-180 | LLR North Well | 3158.88 | 12/14/17 | 3158.23 | -0.65 | 0.70 | 0.05 | 0.75 |

1) GWE: Groundwater elevation measured in feet above mean sea level. Baseline GWEs set January 2010 and March 2011 and approved by Inyo County Water Department (ICWD)

2) Max DD and Trigger Level: Maximum Acceptable Drawdown and Drawdown Trigger Level from Table 4 of the "Third Updated Groundwater Flow Model and Predictive Simulation Results, Coso Operating Company Hay Ranch Water Extraction and Delivery System, Conditional Use Permit (CUP) 2007-003" Dated August 24, 2017.


3) Cinder Road well damaged in October 2017, surveyed measuring point removed. Accuracy of GWE calculation may be reduced.

FIGURES






FIGURE 3
GROUNDWATER ELEVATION and HAY RANCH PUMPING
 Cal Pumice, Dunmovin, HR 1A and HR 2A

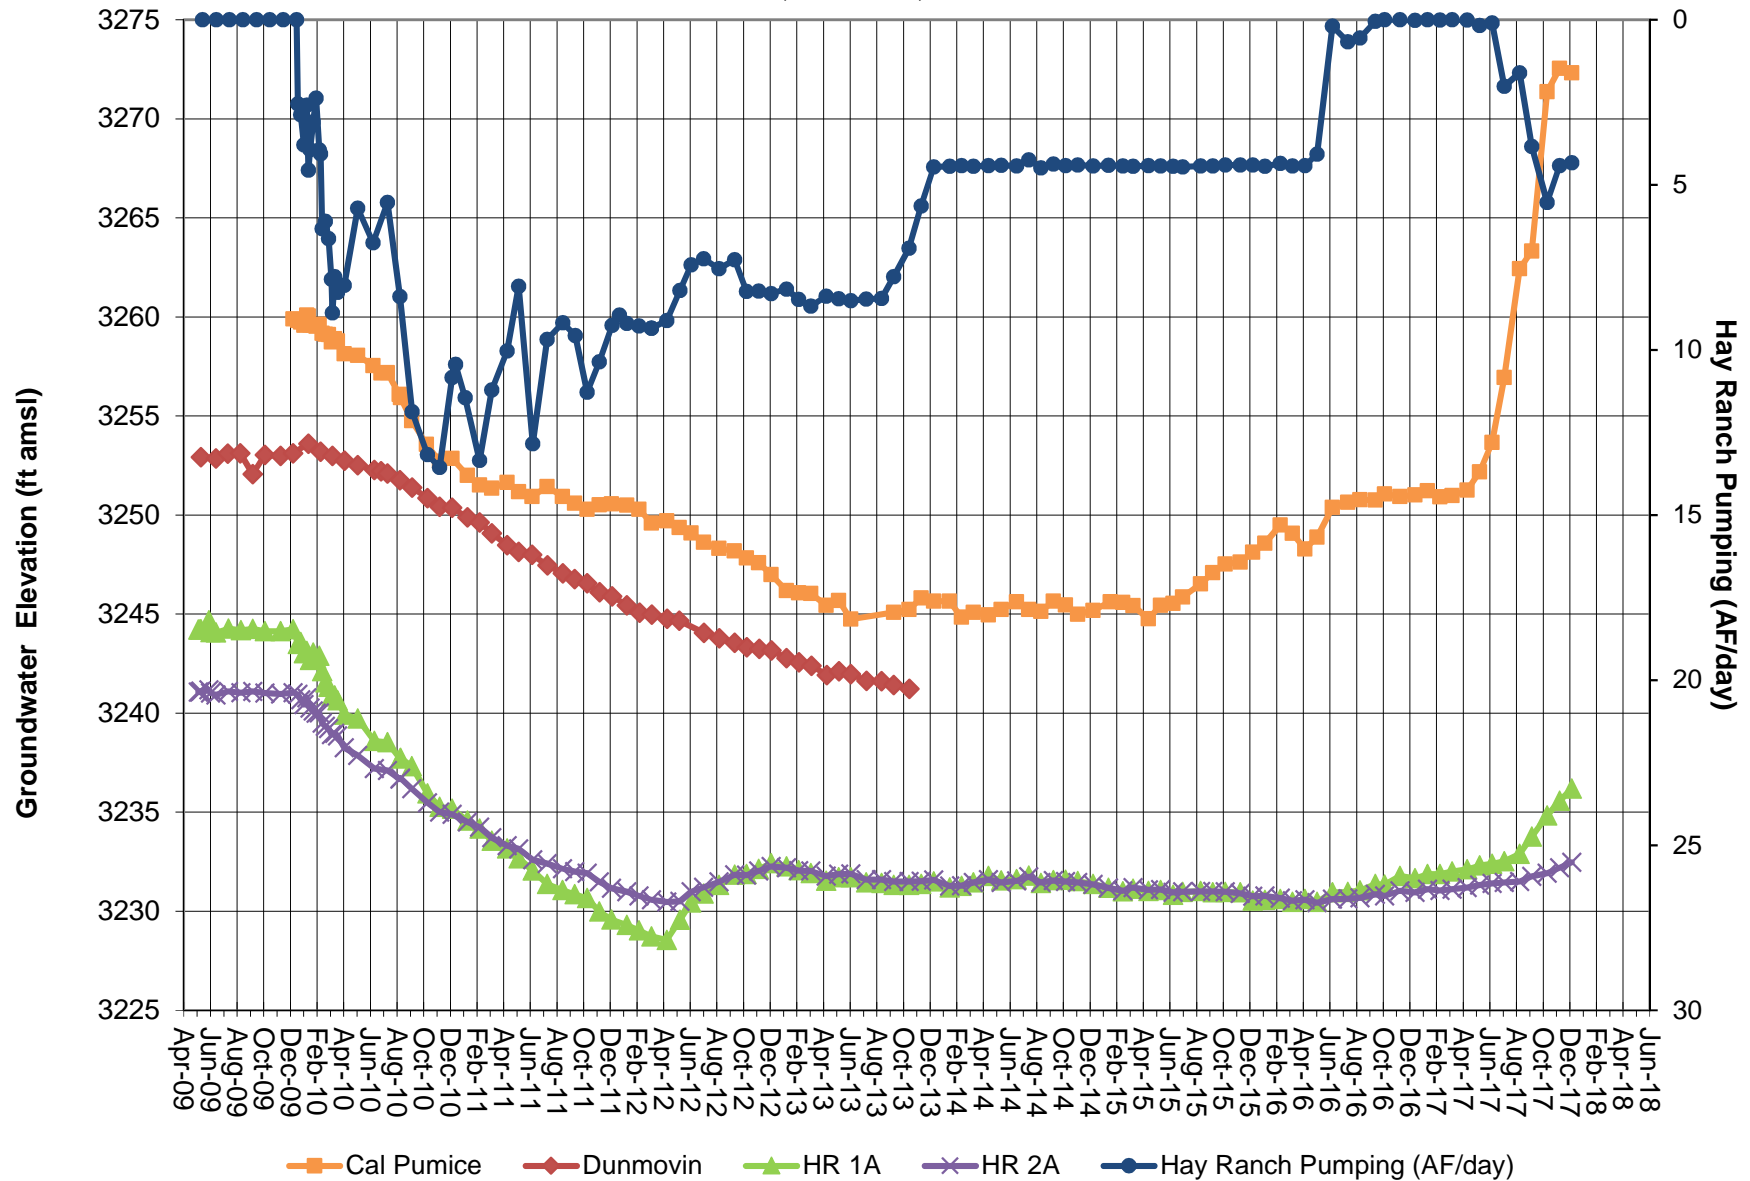


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Hay Ranch pumping is average acre feet per day.
 Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 4
GROUNDWATER ELEVATION and HAY RANCH PUMPING
HR 1A, HR 1B and HR 1C

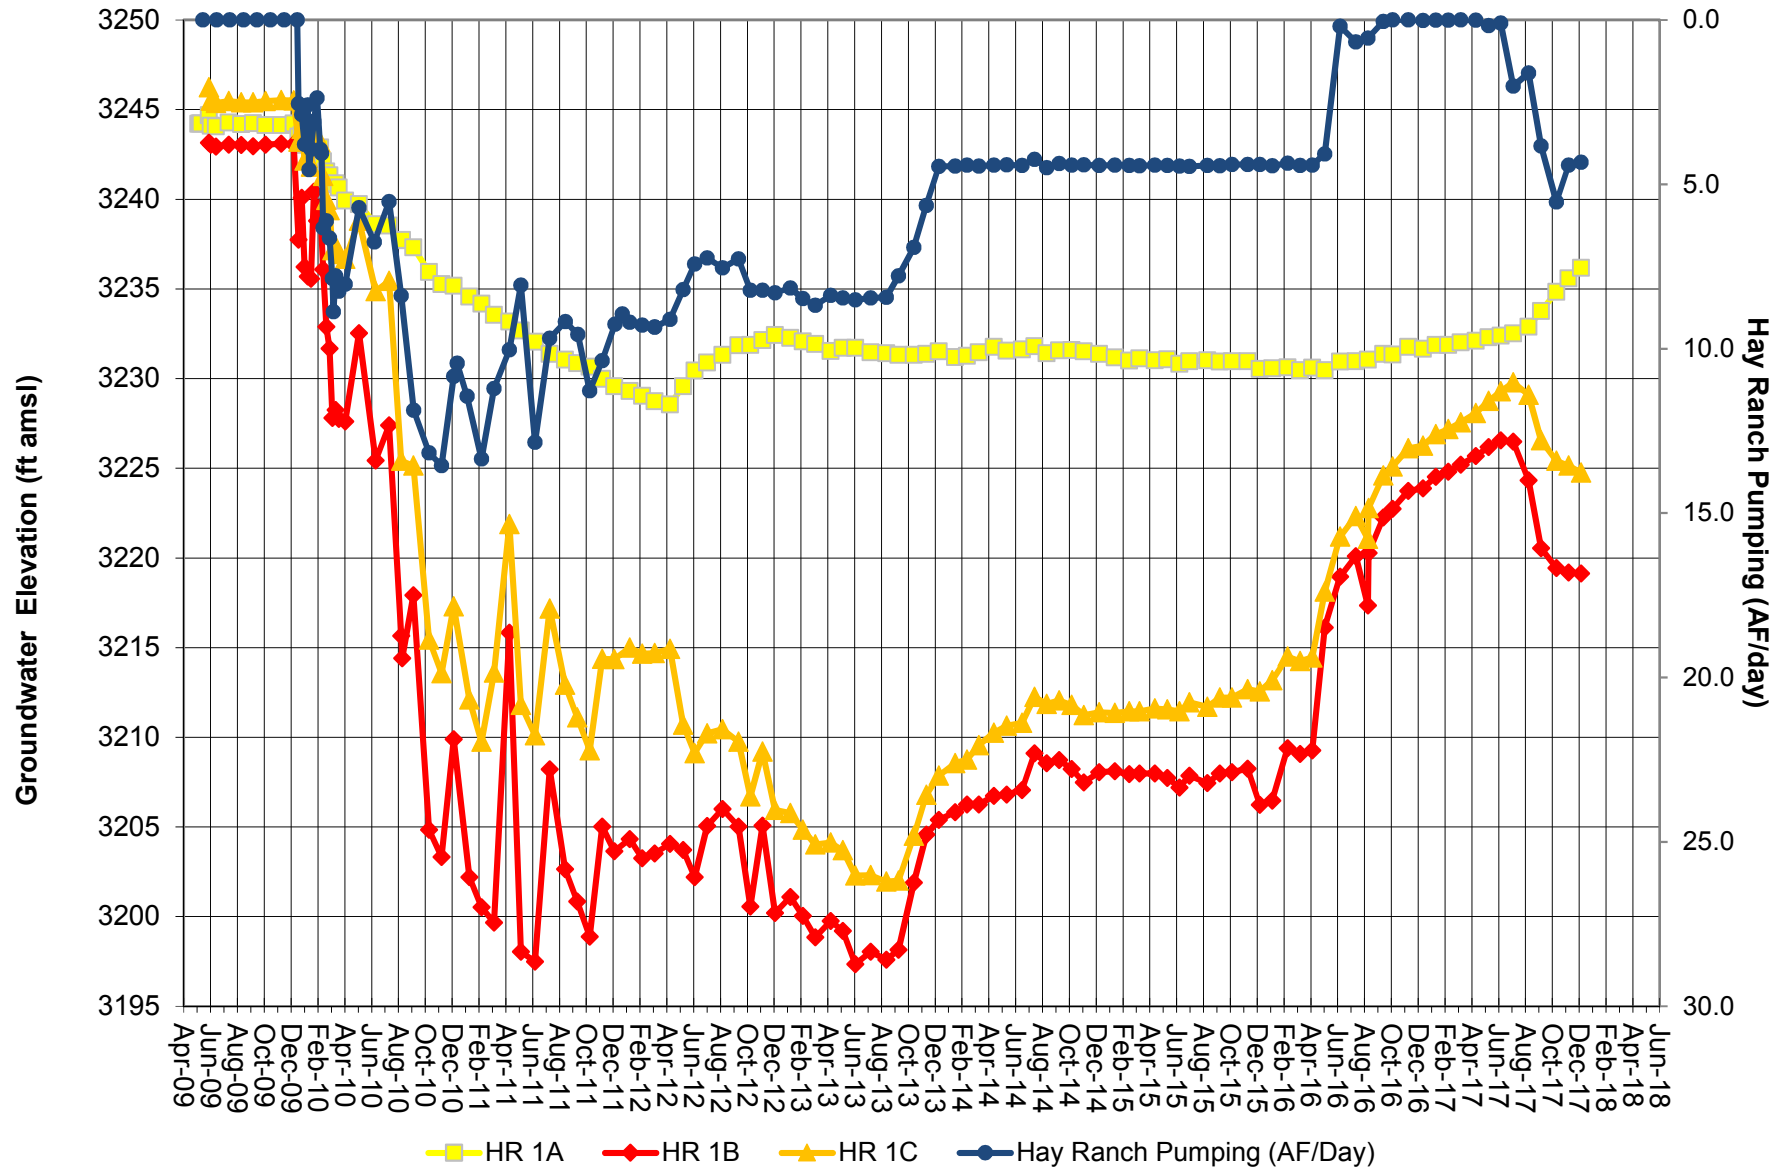


Note: GWE data based on manual DTW measurements. Hay Ranch pumping is average acre feet per day.
Screened intervals: HR 1A 170-260 feet; HR 1B 490-540 feet; HR 1C 340-405 feet.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 5
GROUNDWATER ELEVATION and HAY RANCH PUMPING
HR 2A, HR 2B and HR 2C

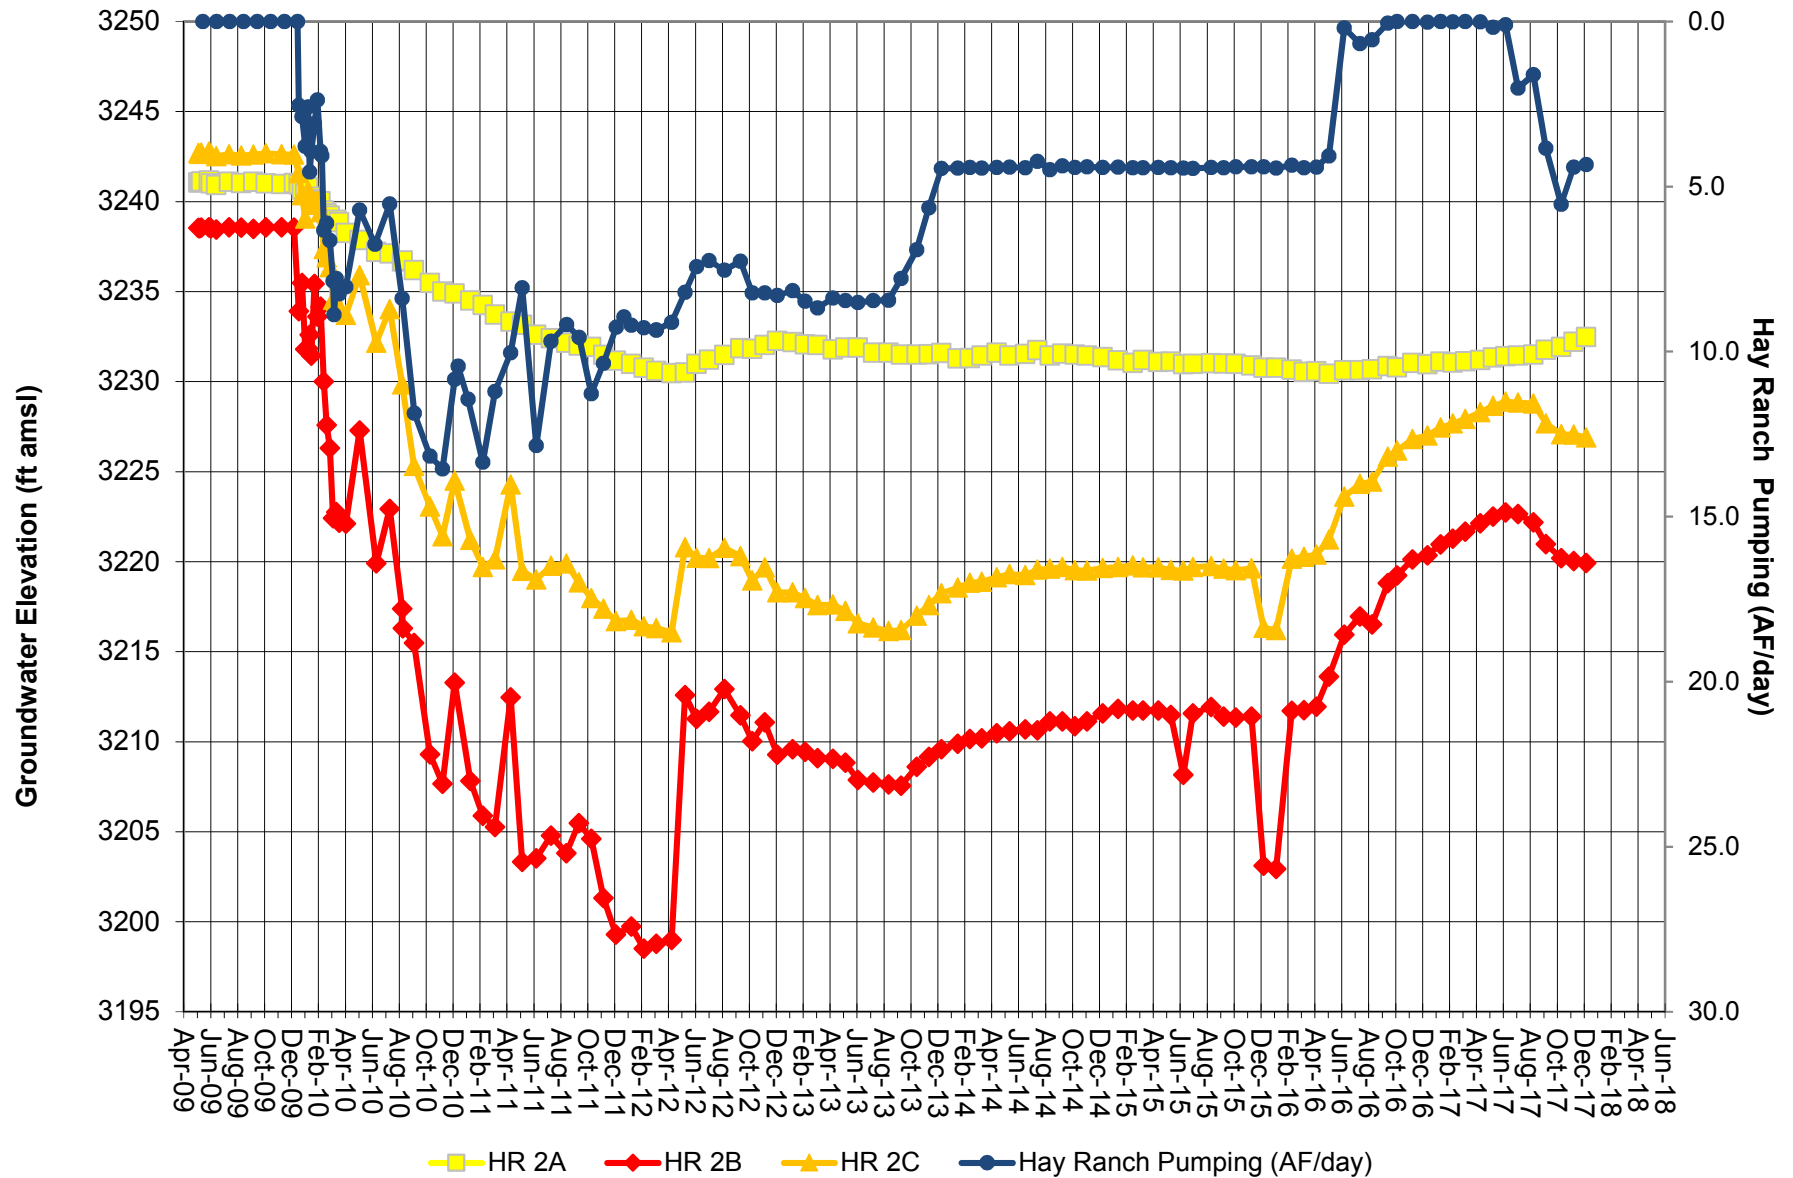


Note: GWE data based on manual DTW measurements. Hay Ranch pumping is average acre feet per day.
Screened intervals: HR 2A 180-300 feet; HR 2B 519-584 feet; HR 2C 370-420 feet.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 6A
GROUNDWATER ELEVATION and HAY RANCH PUMPING
Coso Jct Ranch and Coso Jct Store #1

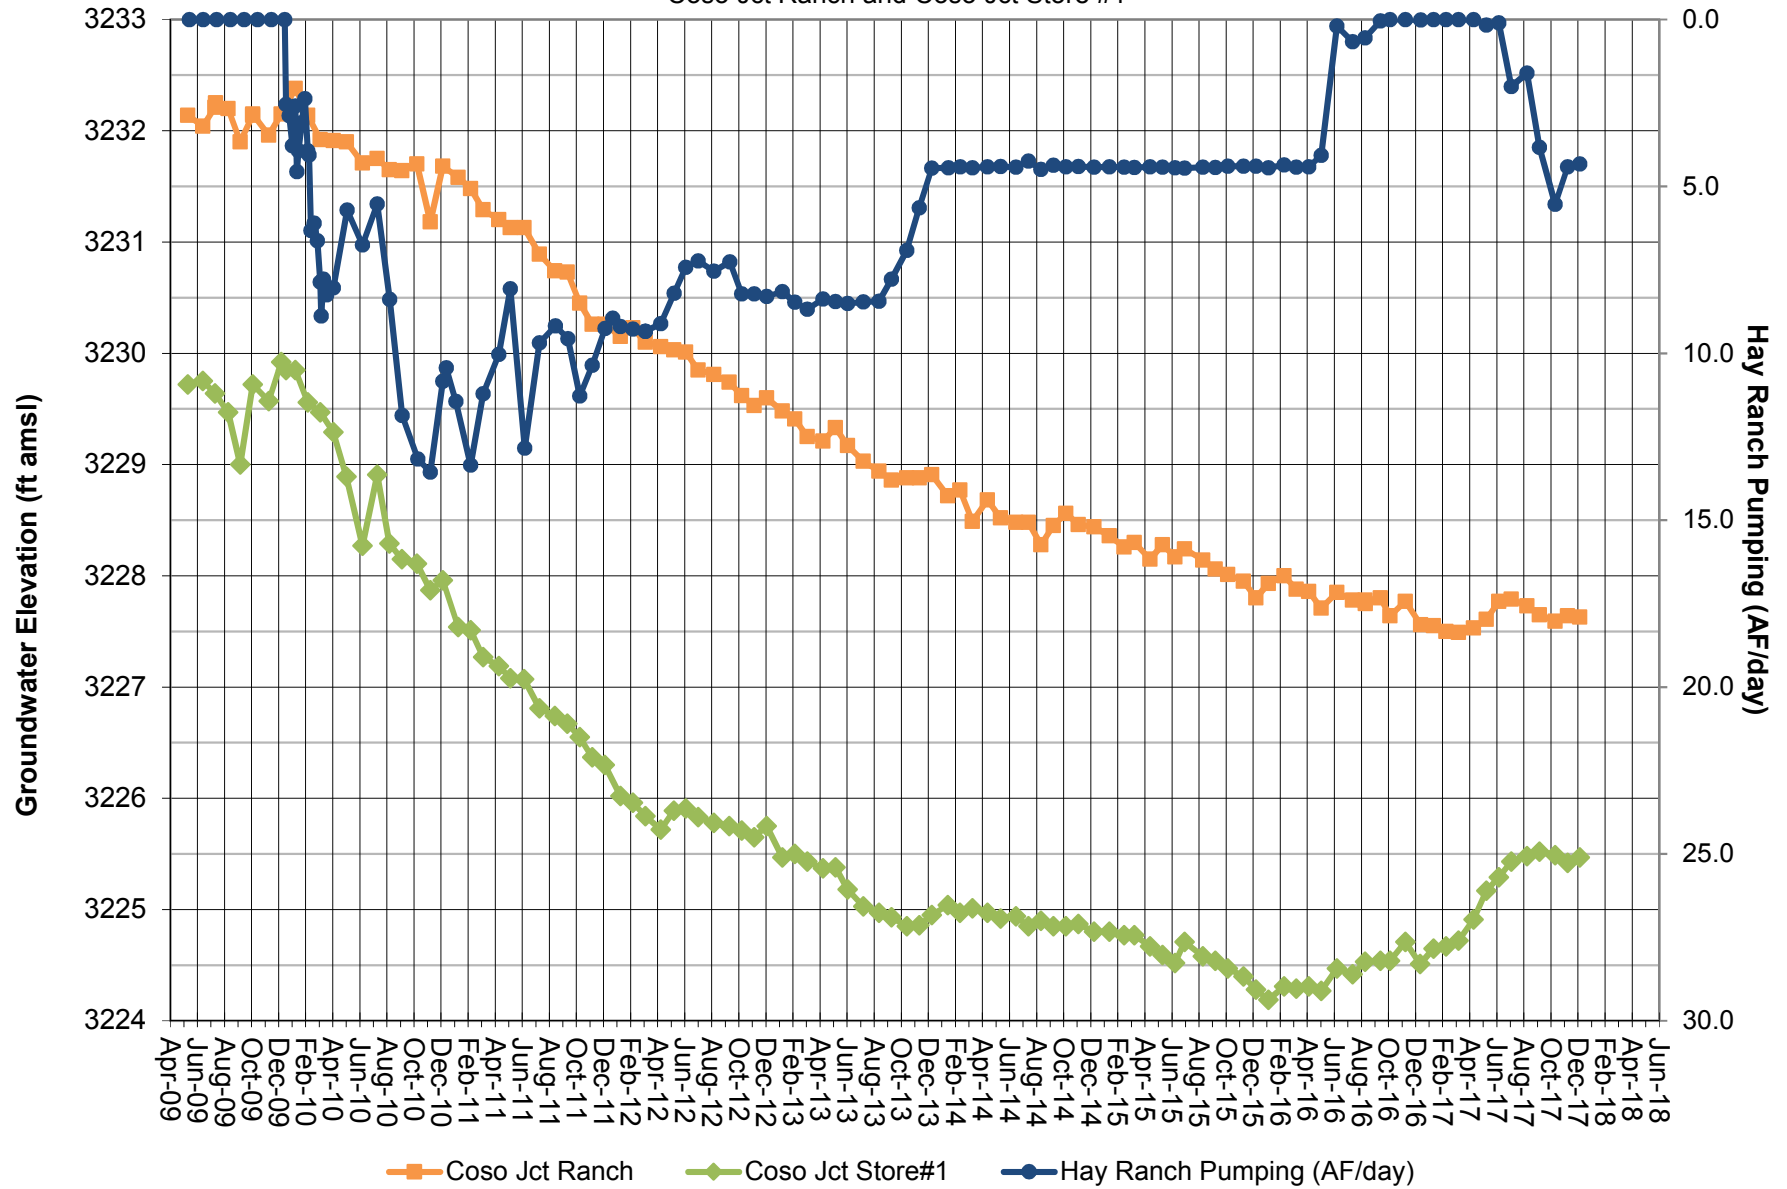


Note: Groundwater elevation data based on manual depth-to-water measurements.
Hay Ranch pumping is average acre feet per day.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 6B
GROUNDWATER ELEVATION and HAY RANCH PUMPING
HR 1A, HR 2A, Coso Jct Ranch and Coso Jct Store #1

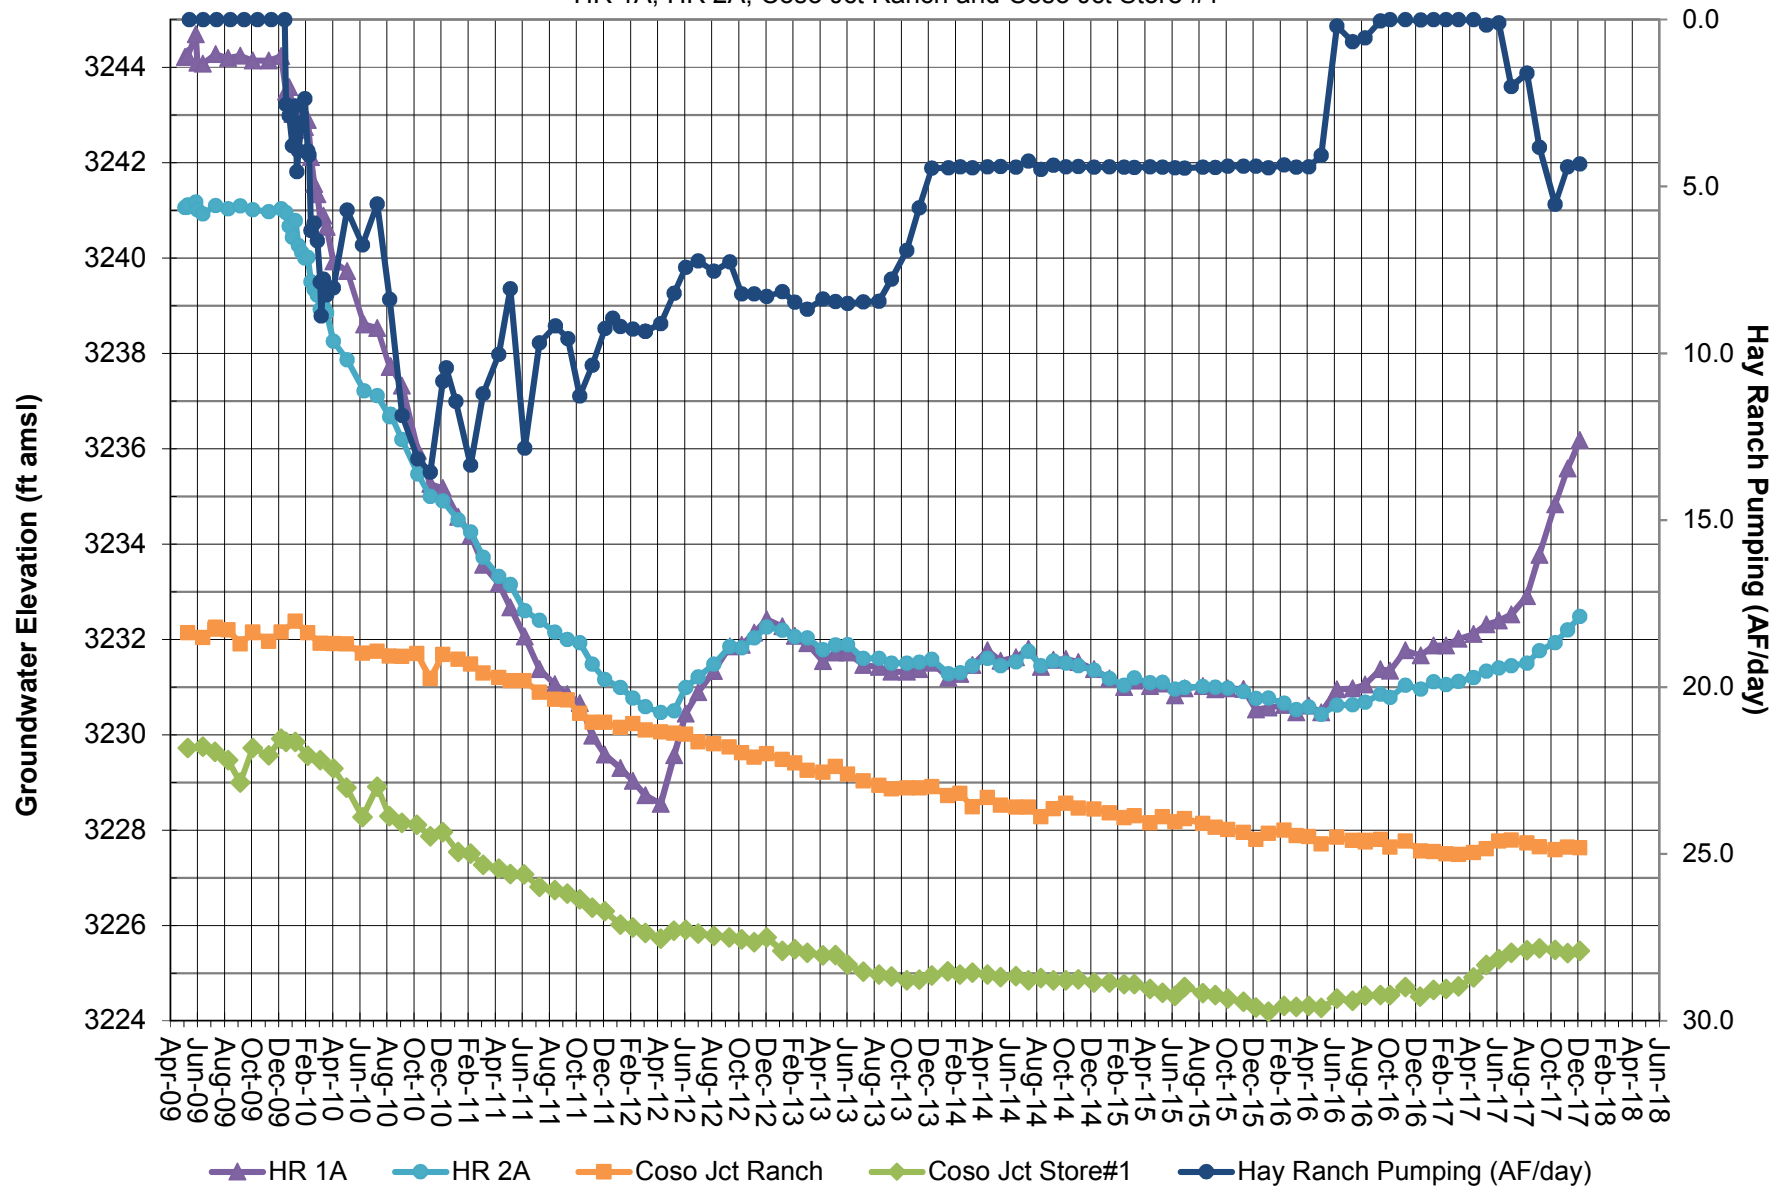


Note: Groundwater elevation data based on manual depth-to-water measurements.
Hay Ranch pumping is average acre feet per day.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 7
GROUNDWATER ELEVATION and HAY RANCH PUMPING
 Davis Ranch North and South

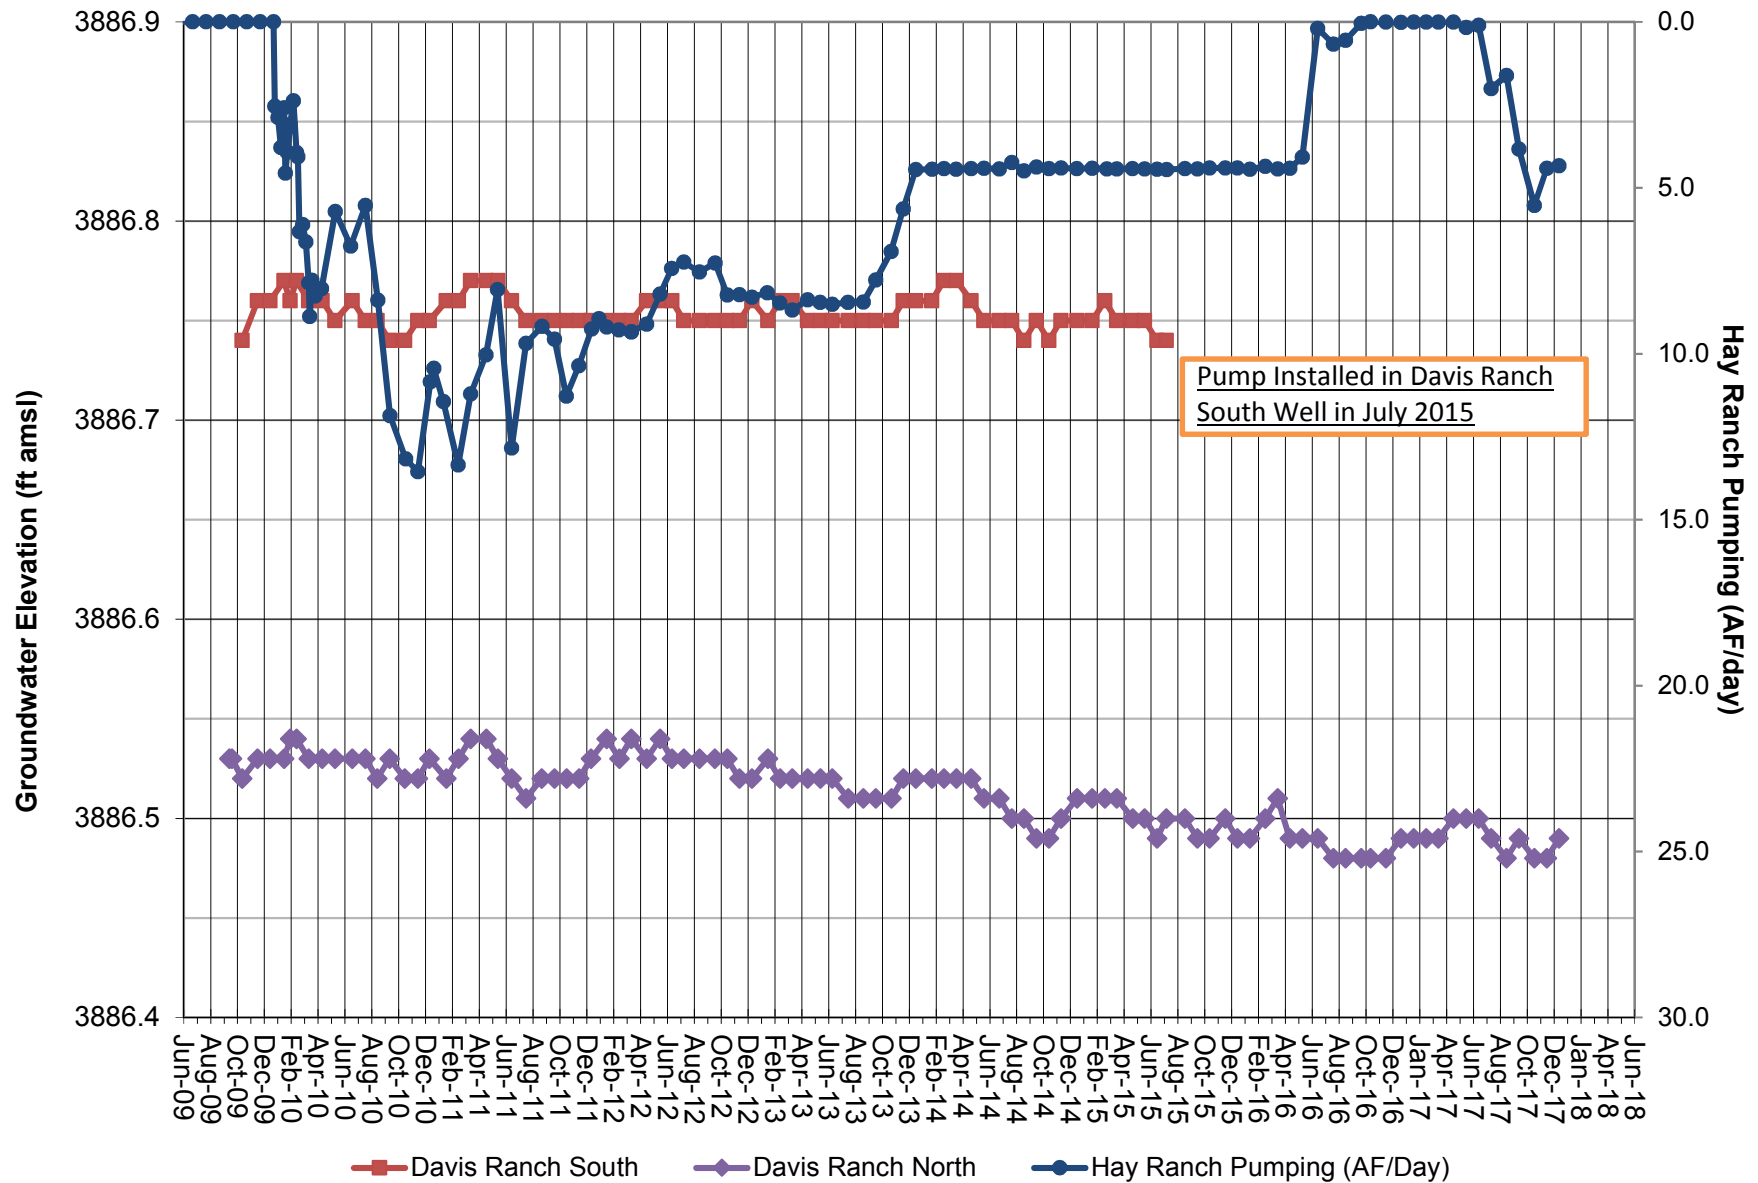


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Hay Ranch pumping is average acre feet per day.
 Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 8
GROUNDWATER ELEVATION and HAY RANCH PUMPING
Red Hill, Lego and G-36

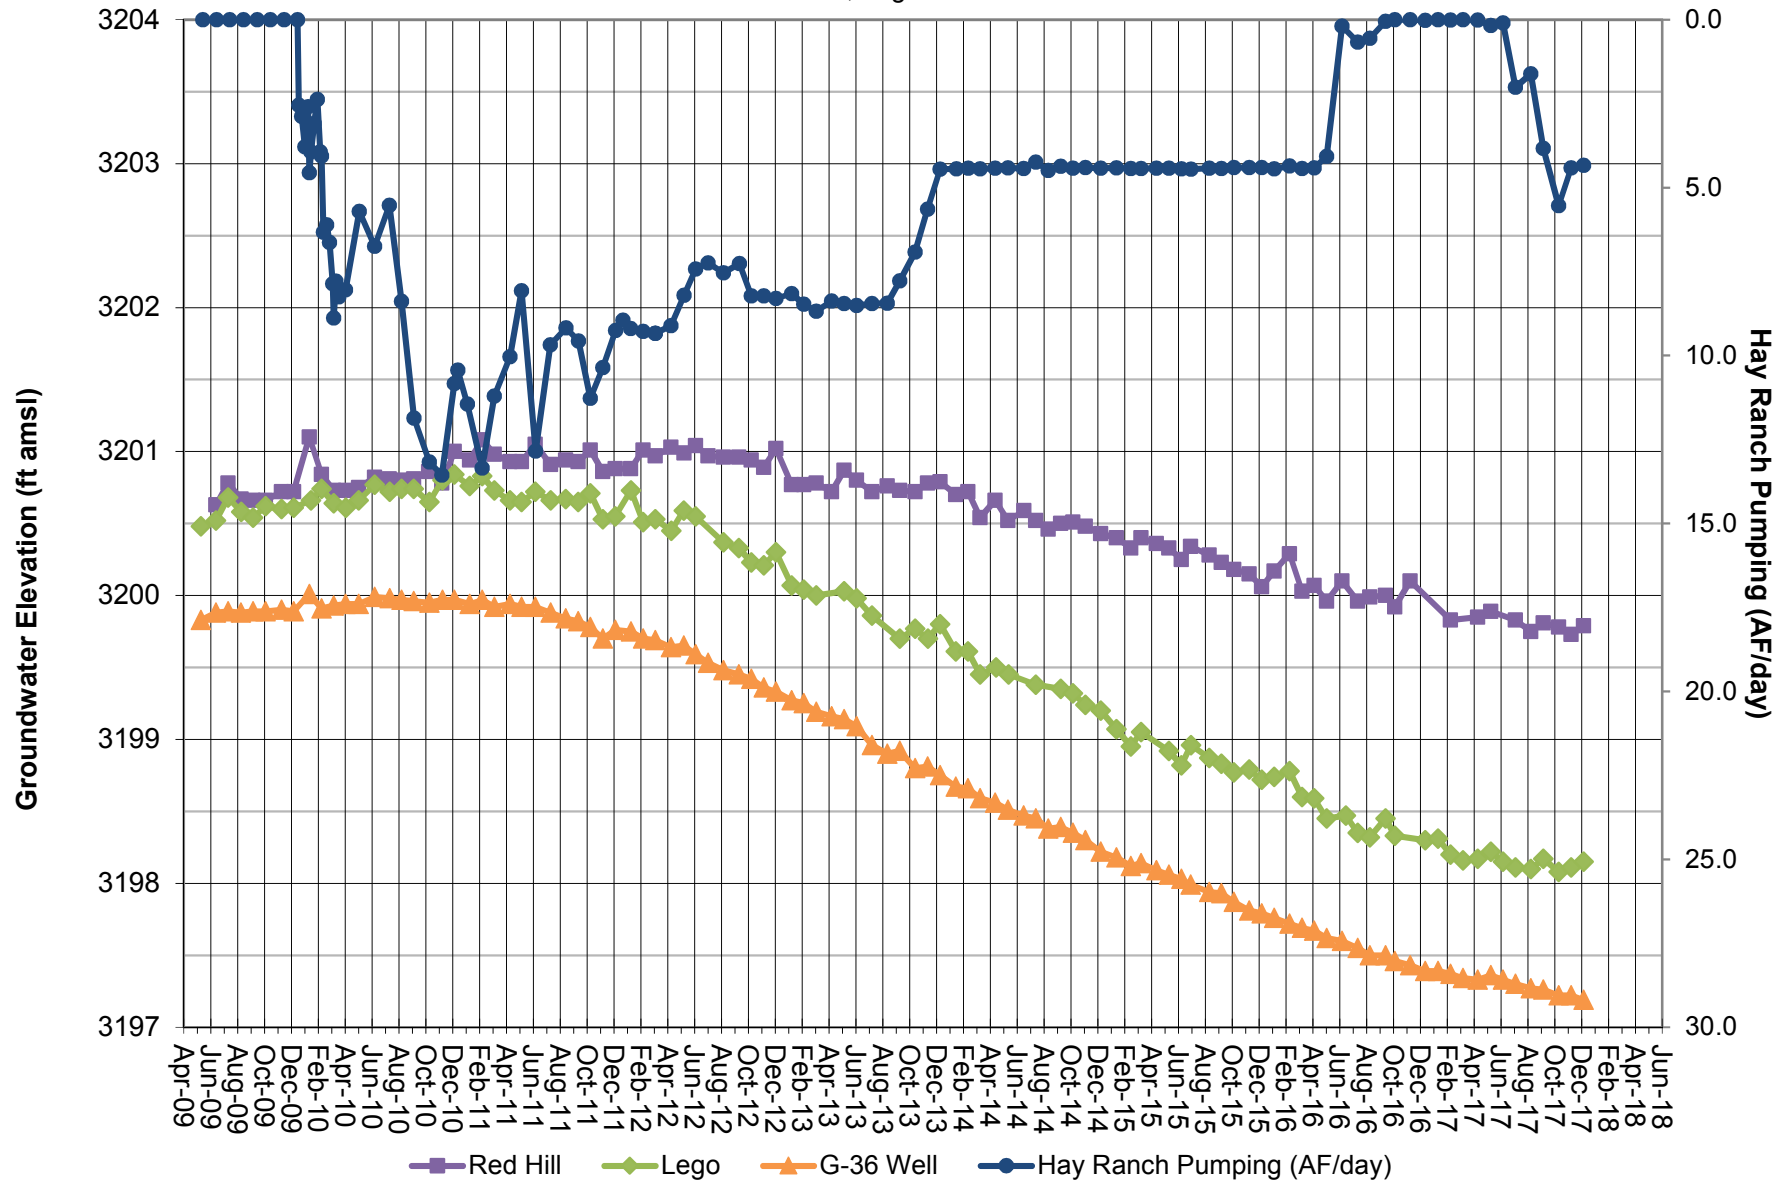


Note: Groundwater elevation data based on manual depth-to-water measurements.
Hay Ranch pumping is average acre feet per day.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 9
GROUNDWATER ELEVATION and HAY RANCH PUMPING
18-28 and Cinder Road

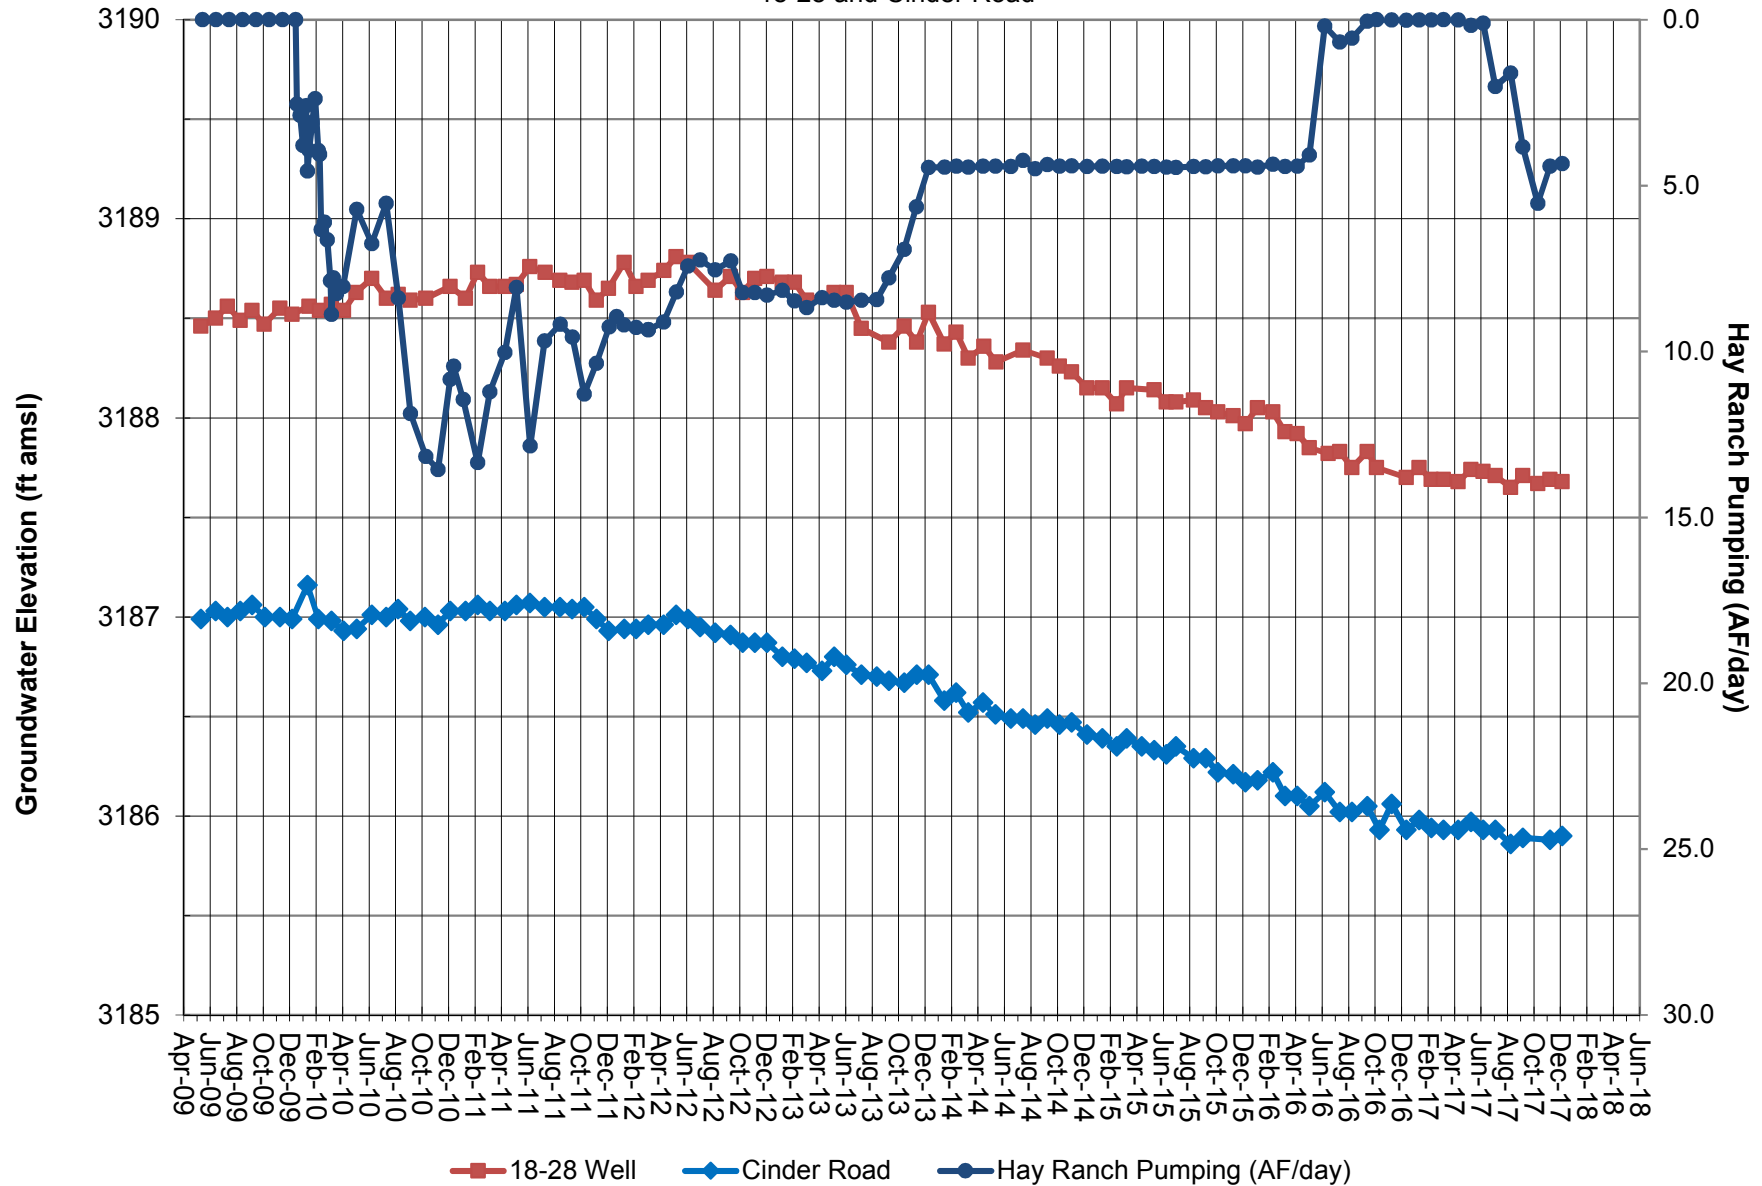


Note: Groundwater elevation data based on manual depth-to-water measurements.
Hay Ranch pumping is average acre feet per day.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 10
GROUNDWATER ELEVATION and HAY RANCH PUMPING
Fossil Falls and LLR North

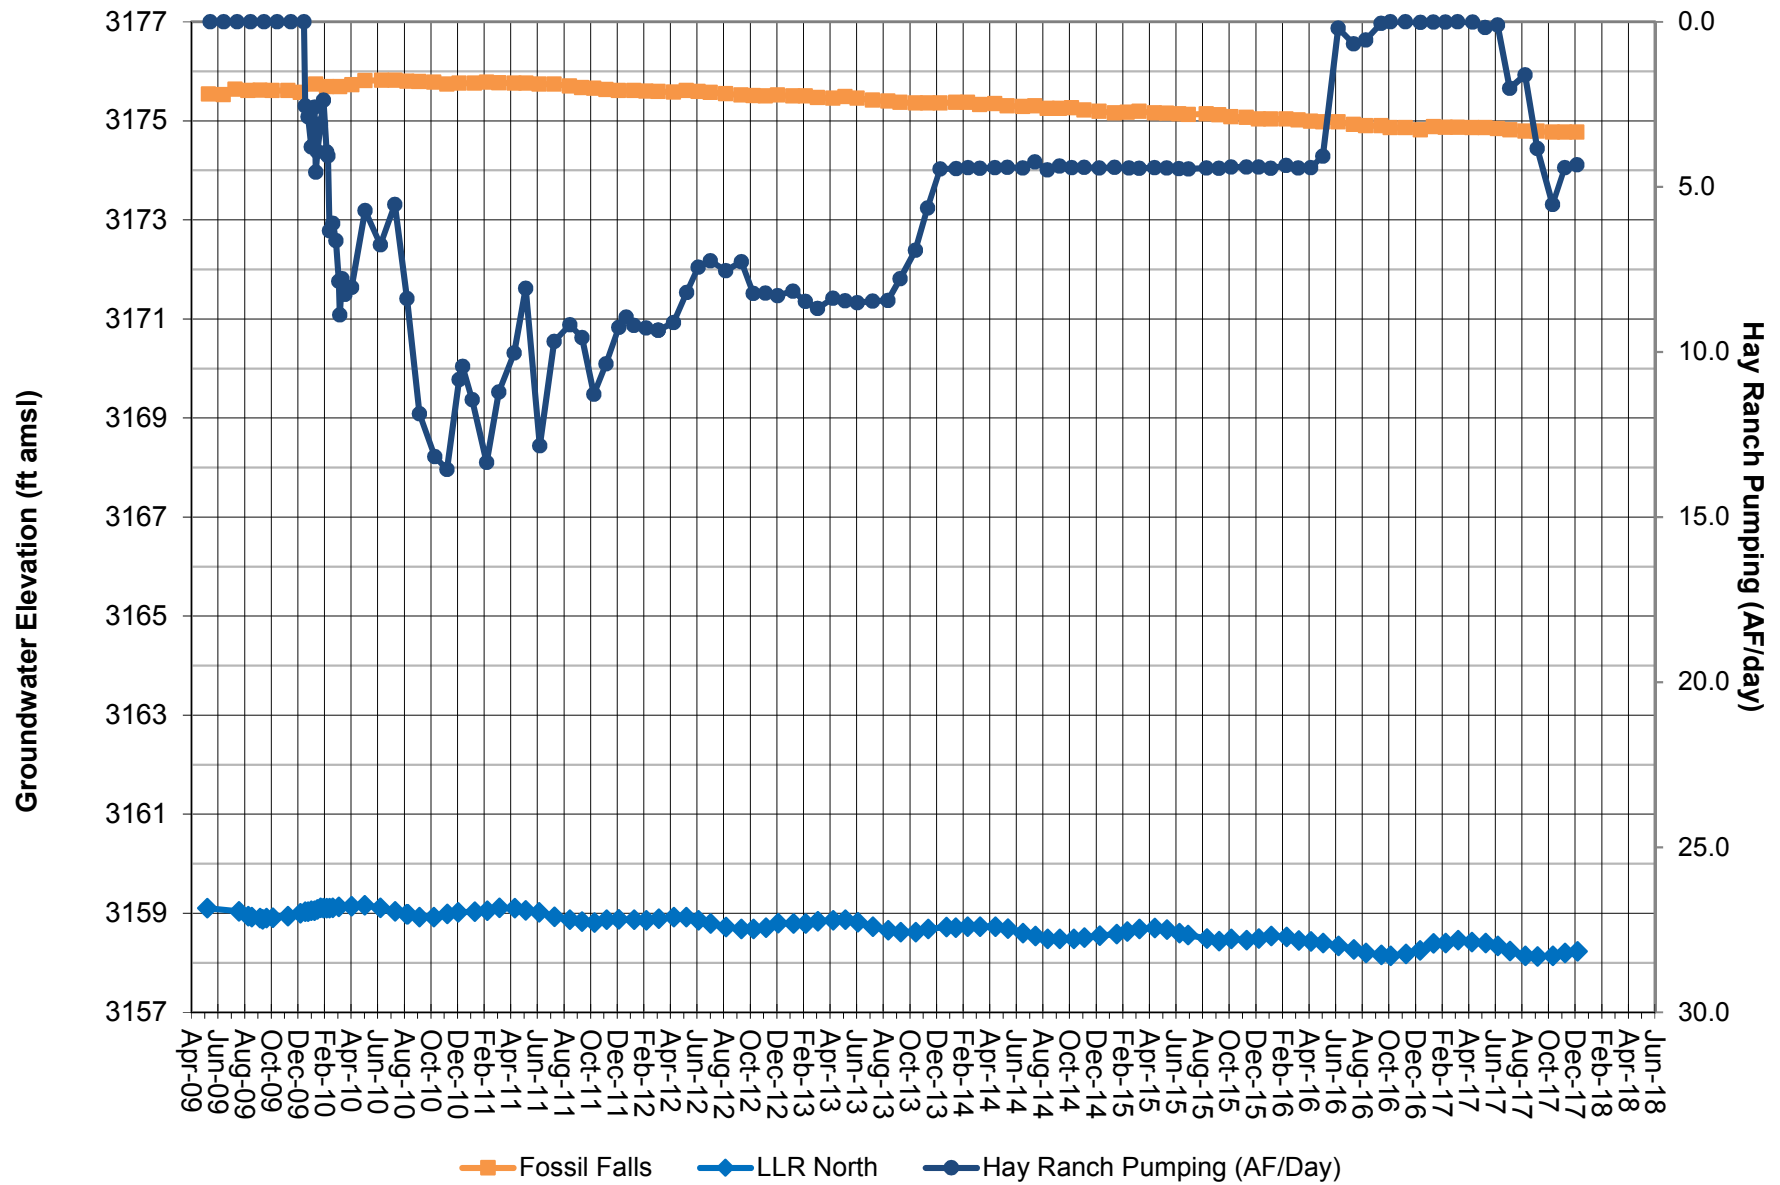


Note: Groundwater elevation data based on manual depth-to-water measurements.
Hay Ranch pumping is average acre feet per day.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

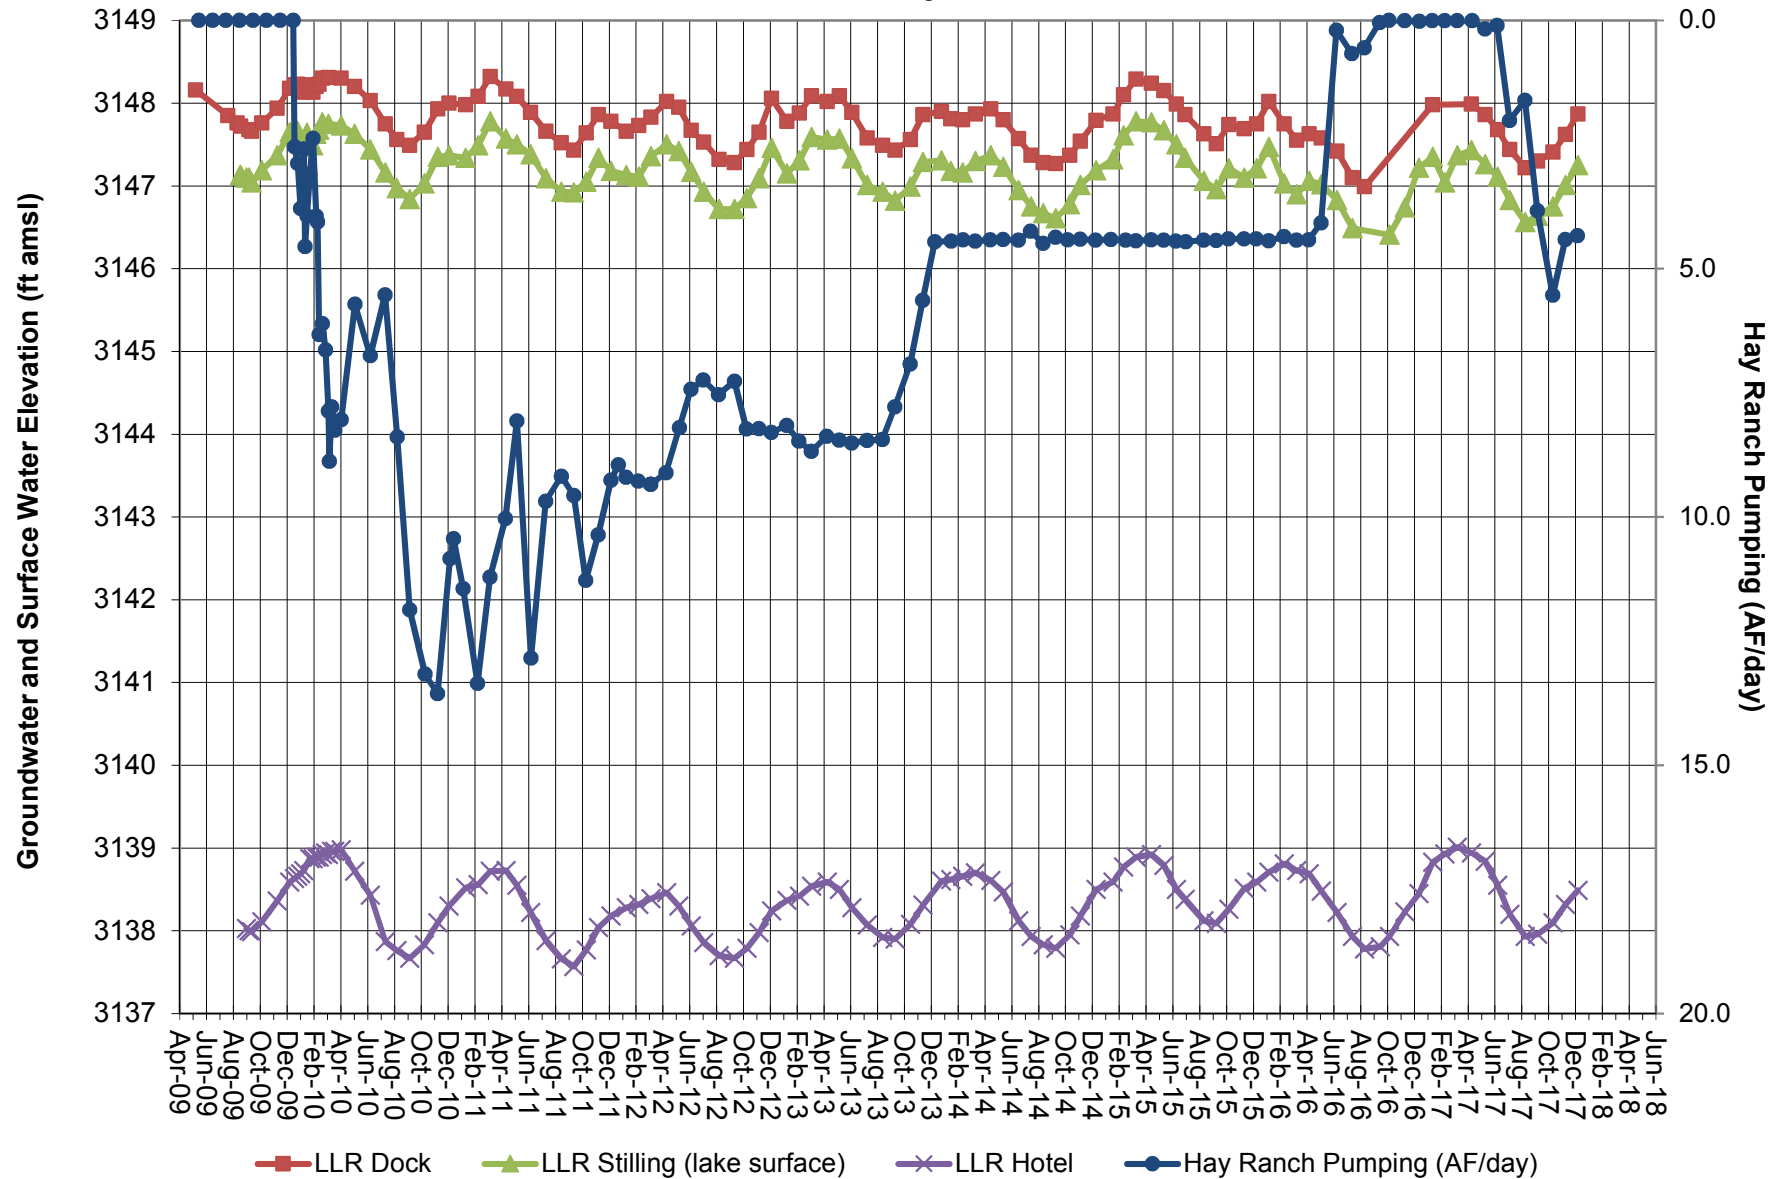FIGURE 11


Note: Groundwater and surface water elevation data based on manual depth-to-water measurements.
Hay Ranch pumping is average acre feet per day.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.

FIGURE 12
WATER ELEVATION and LITTLE LAKE OUTFLOW
LLR Dock and LLR Stilling

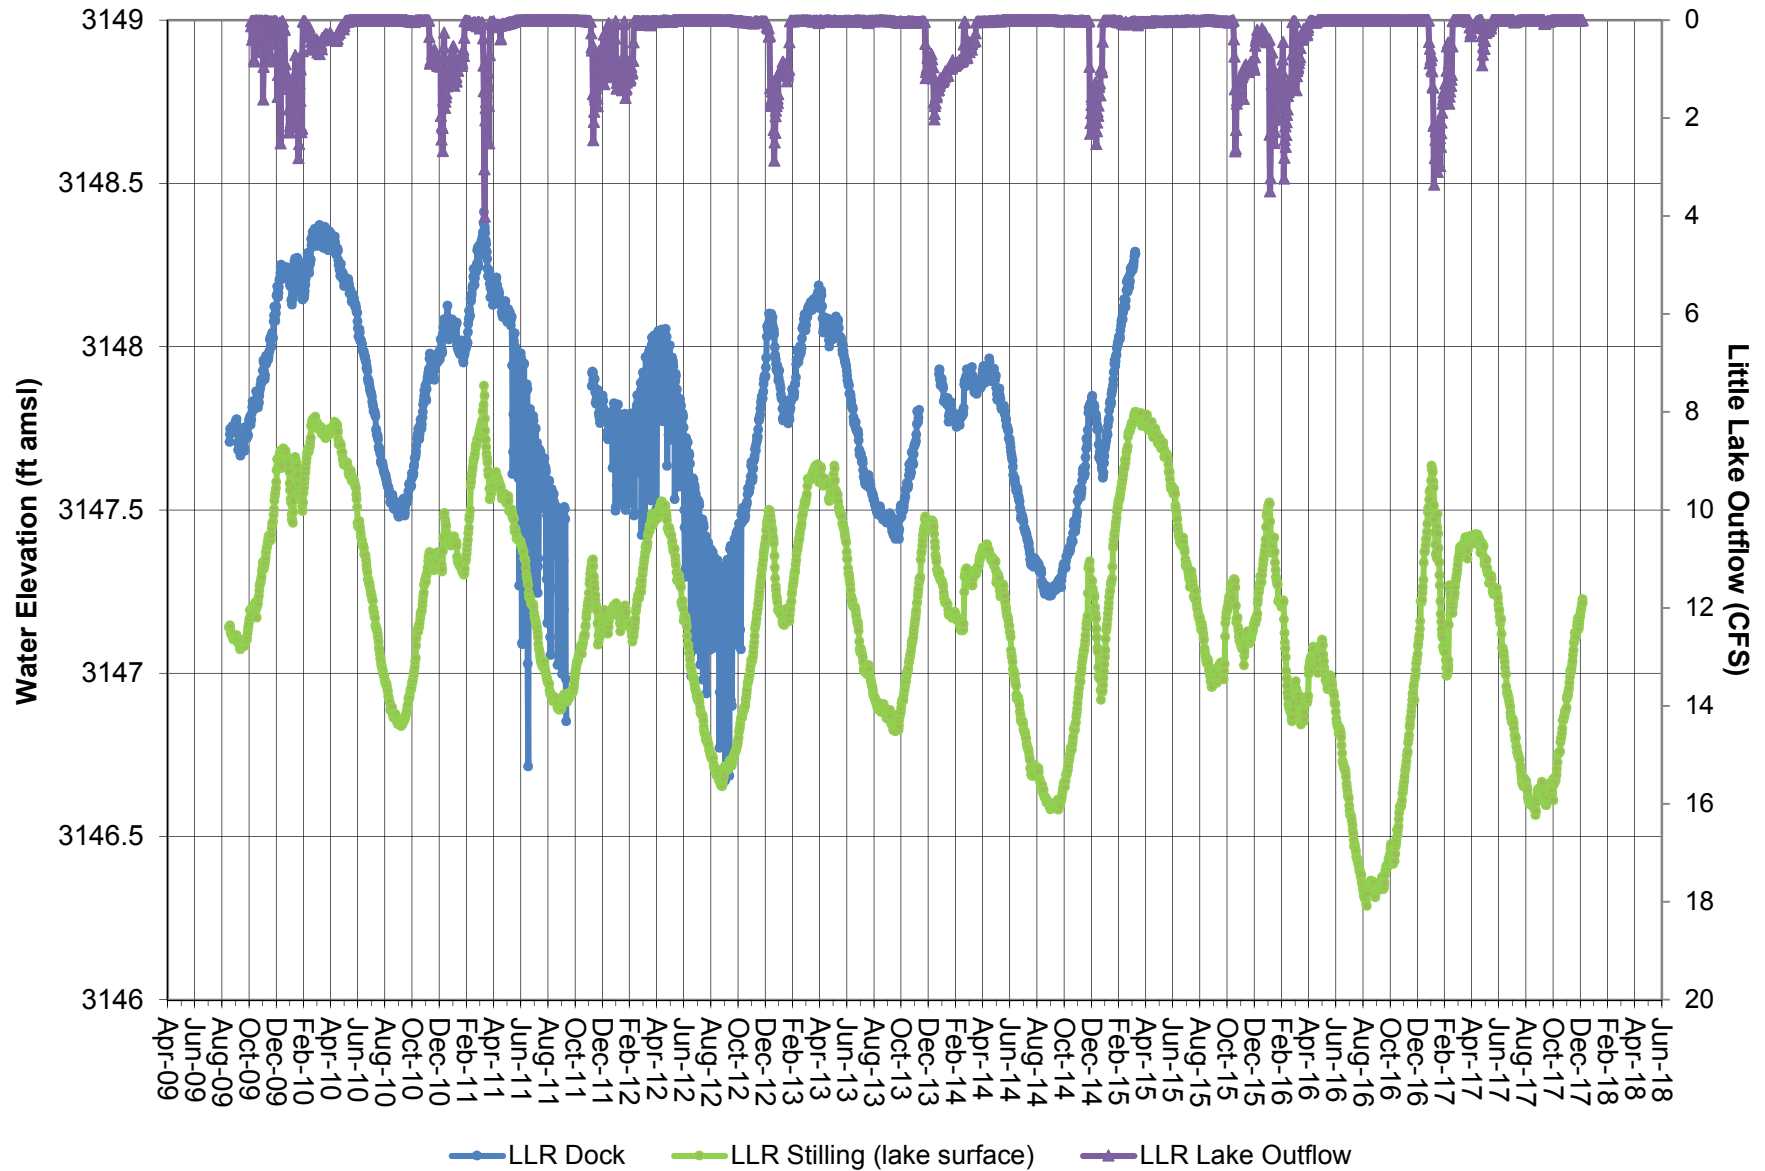

Note: Little Lake Outflow in cubic feet per second.
LLR staff conducted water intermittent pumping from 2011-2012.
Pressure Transducer removed from Dock Well in March 2015.


FIGURE 13
LLR FLOW and HAY RANCH PUMPING
North Culvert, Coso Springs and Little Lake Outflow

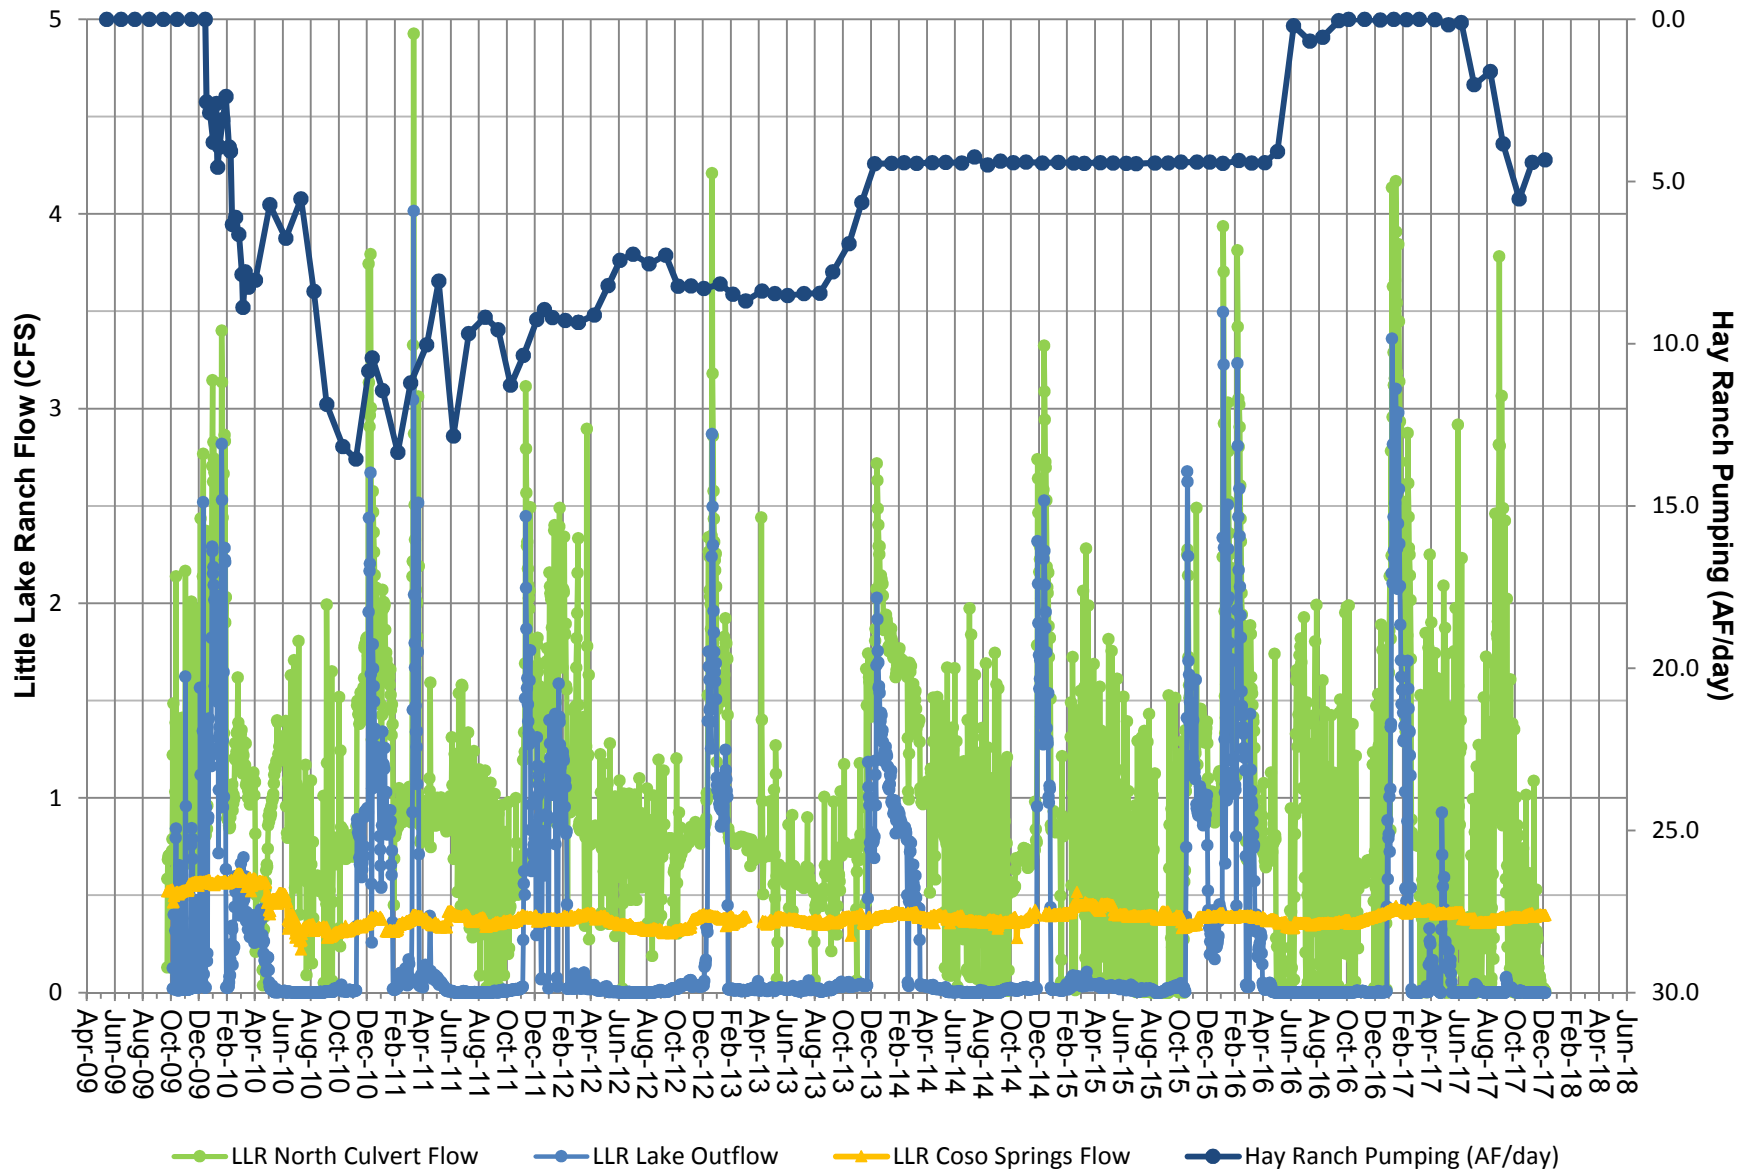

Note: Little Lake Ranch Flows are cubic feet per second.
 Hay Ranch pumping is average acre feet per day.


Flows at Little Lake Outflow and North Culvert are influenced both by natural and water management processes at LLR.

FIGURE 14
TOTAL DISSOLVED SOLIDS (TDS) and HAY RANCH PUMPING
HR 1A, HR 1B and HR 1C

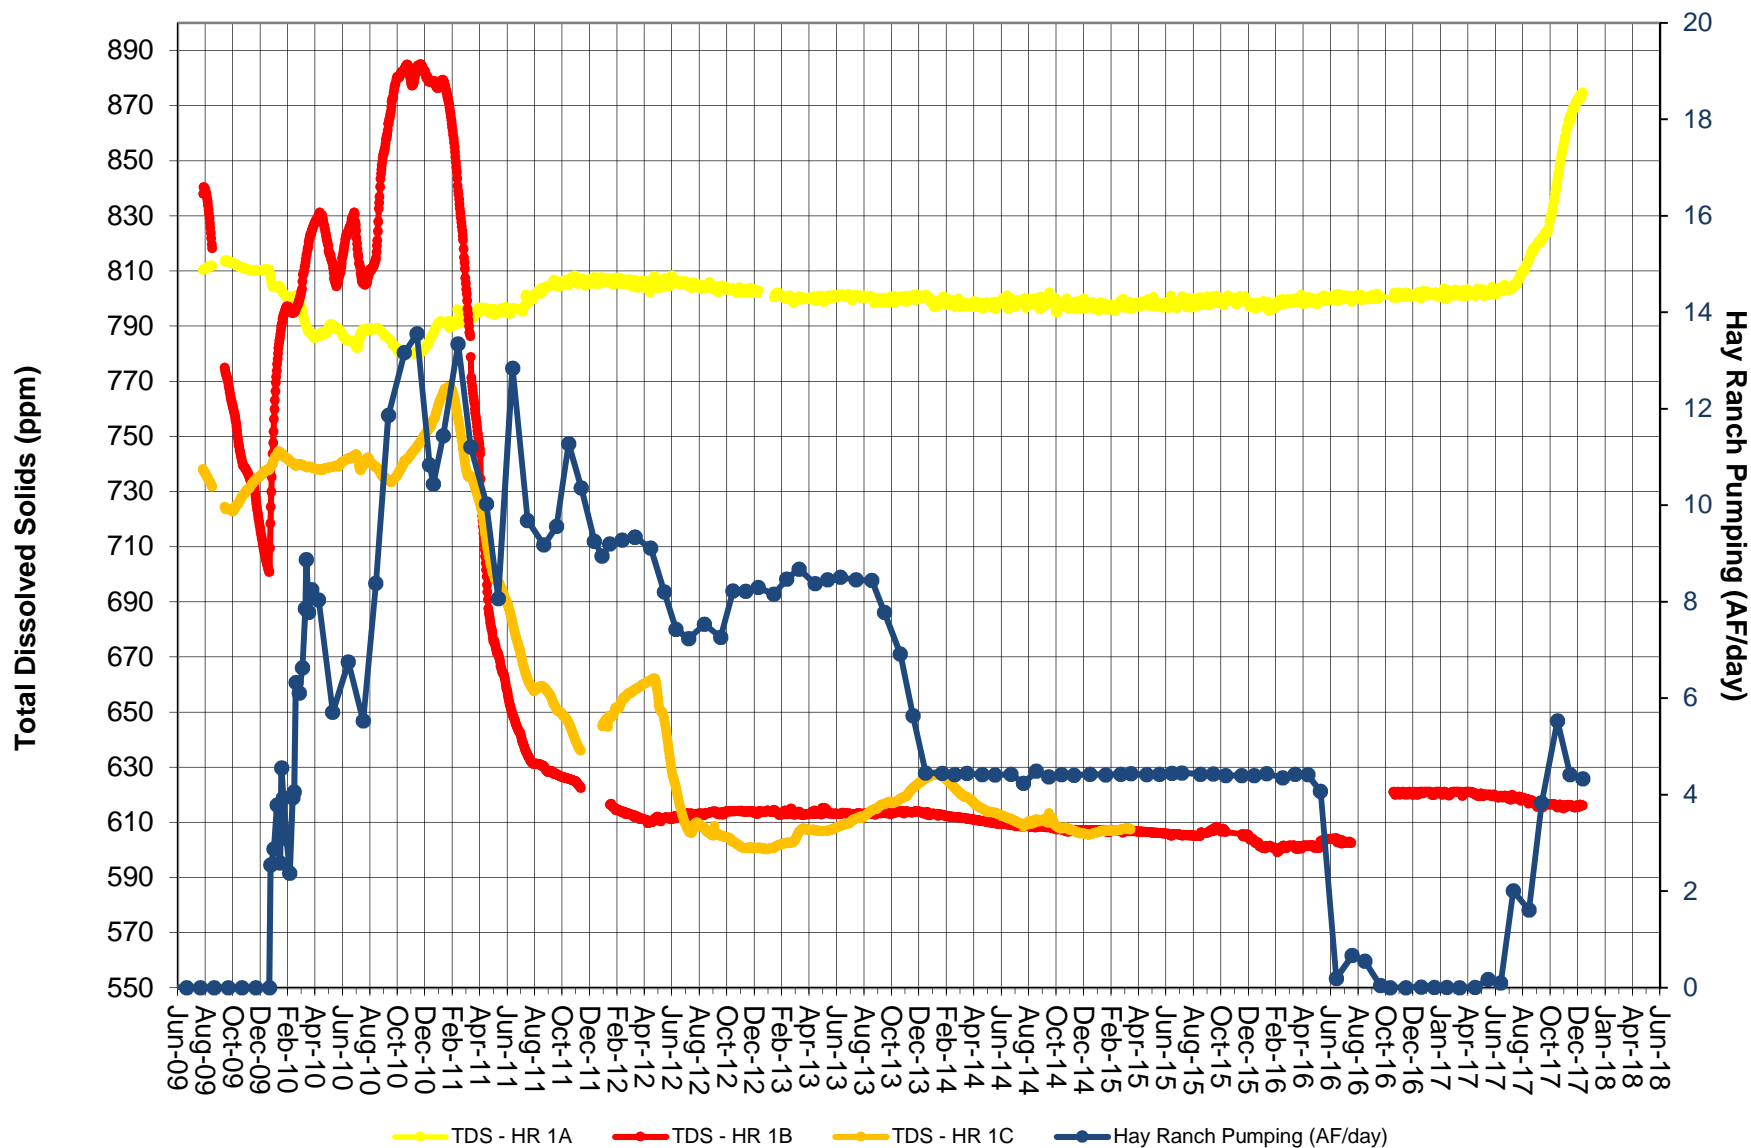


Note:
Screened intervals: HR 1A 170-260 feet; HR 1B 490-540 feet; HR 1C 340-405 feet.
HR 1A, 1B and 1C data gaps due to transducer malfunction or adjustment.
PT removed from HR1C in March 2015.

FIGURE 15
TOTAL DISSOLVED SOLIDS (TDS) and HAY RANCH PUMPING
HR 2A, HR 2B and HR 2C

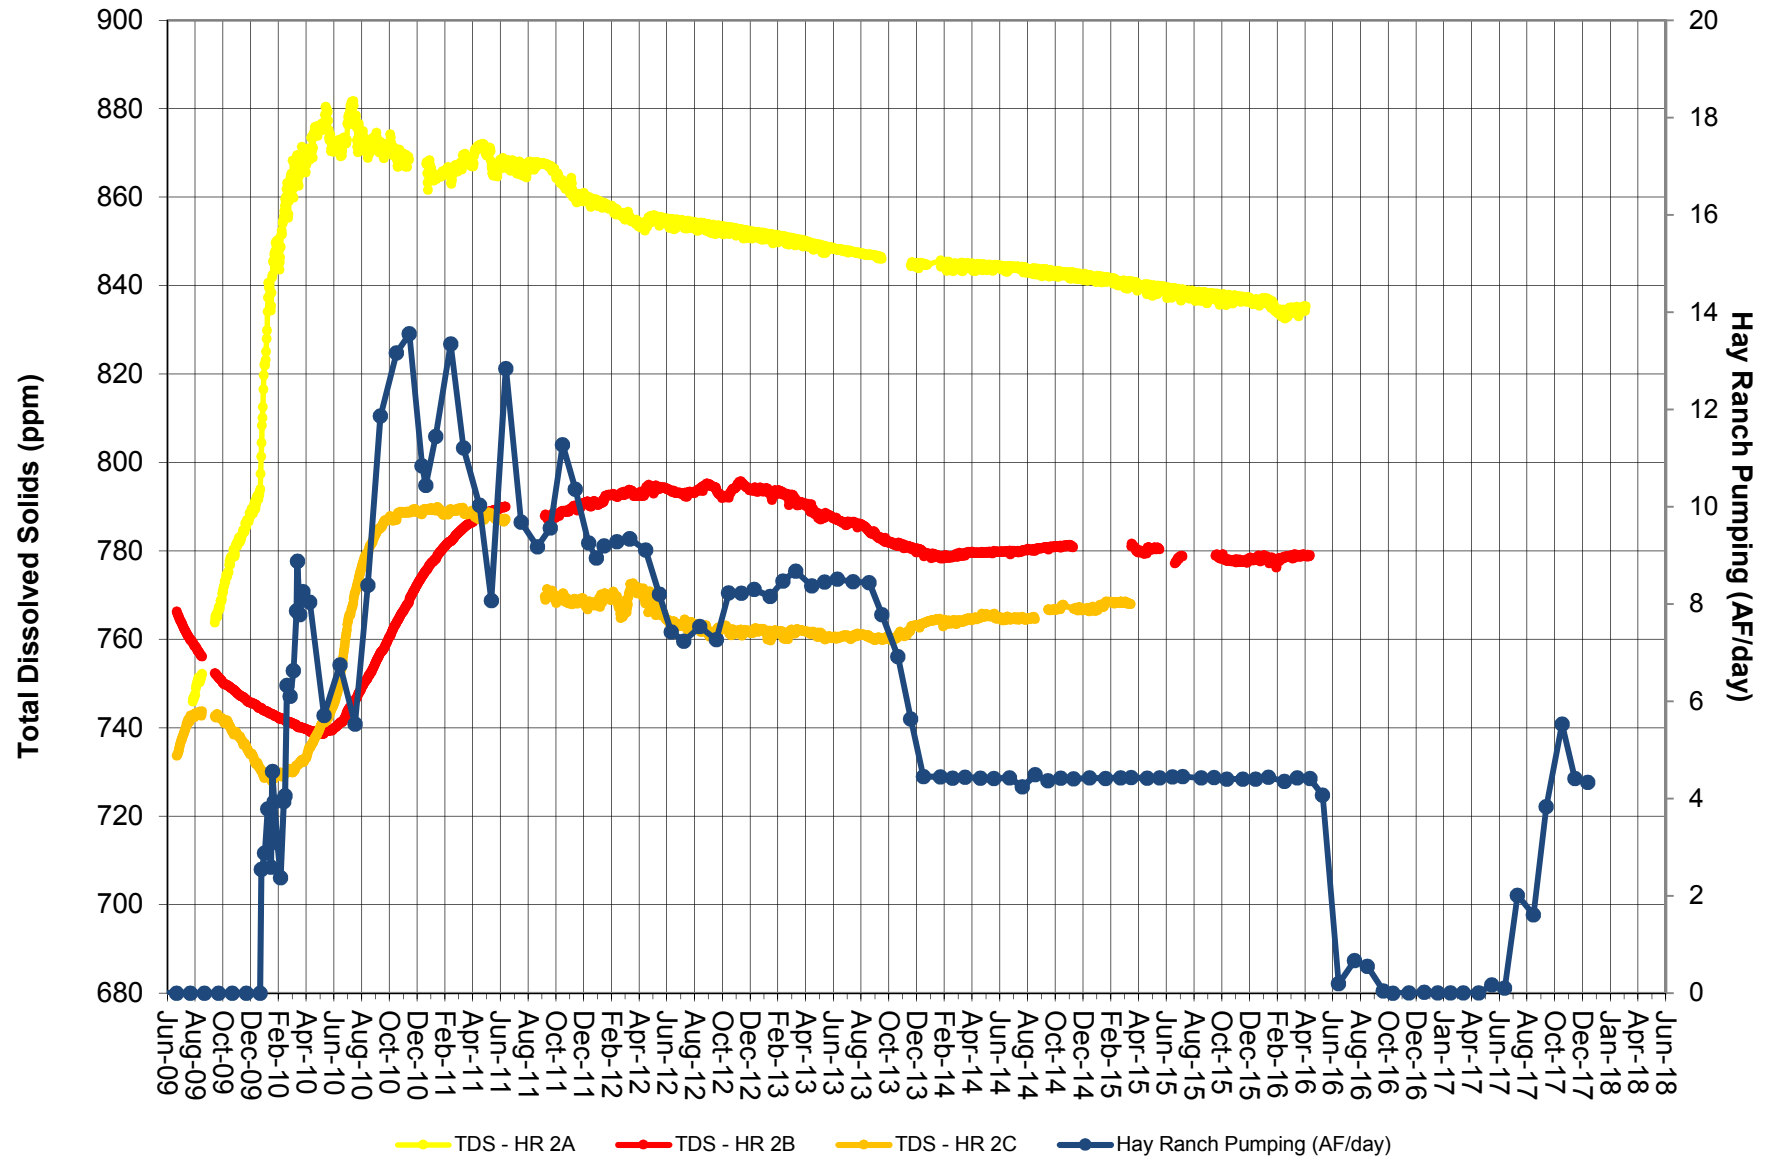


Note: Screened intervals: HR 2A 180-300 feet; HR 2B 519-584 feet; HR 2C 370-420 feet.
HR 2A, and 2B no longer record TDS as of April 2016.
PT removed from HR2C in March 2015.

FIGURE 16
TOTAL DISSOLVED SOLIDS (TDS) and HAY RANCH PUMPING
Red Hill and LLR North

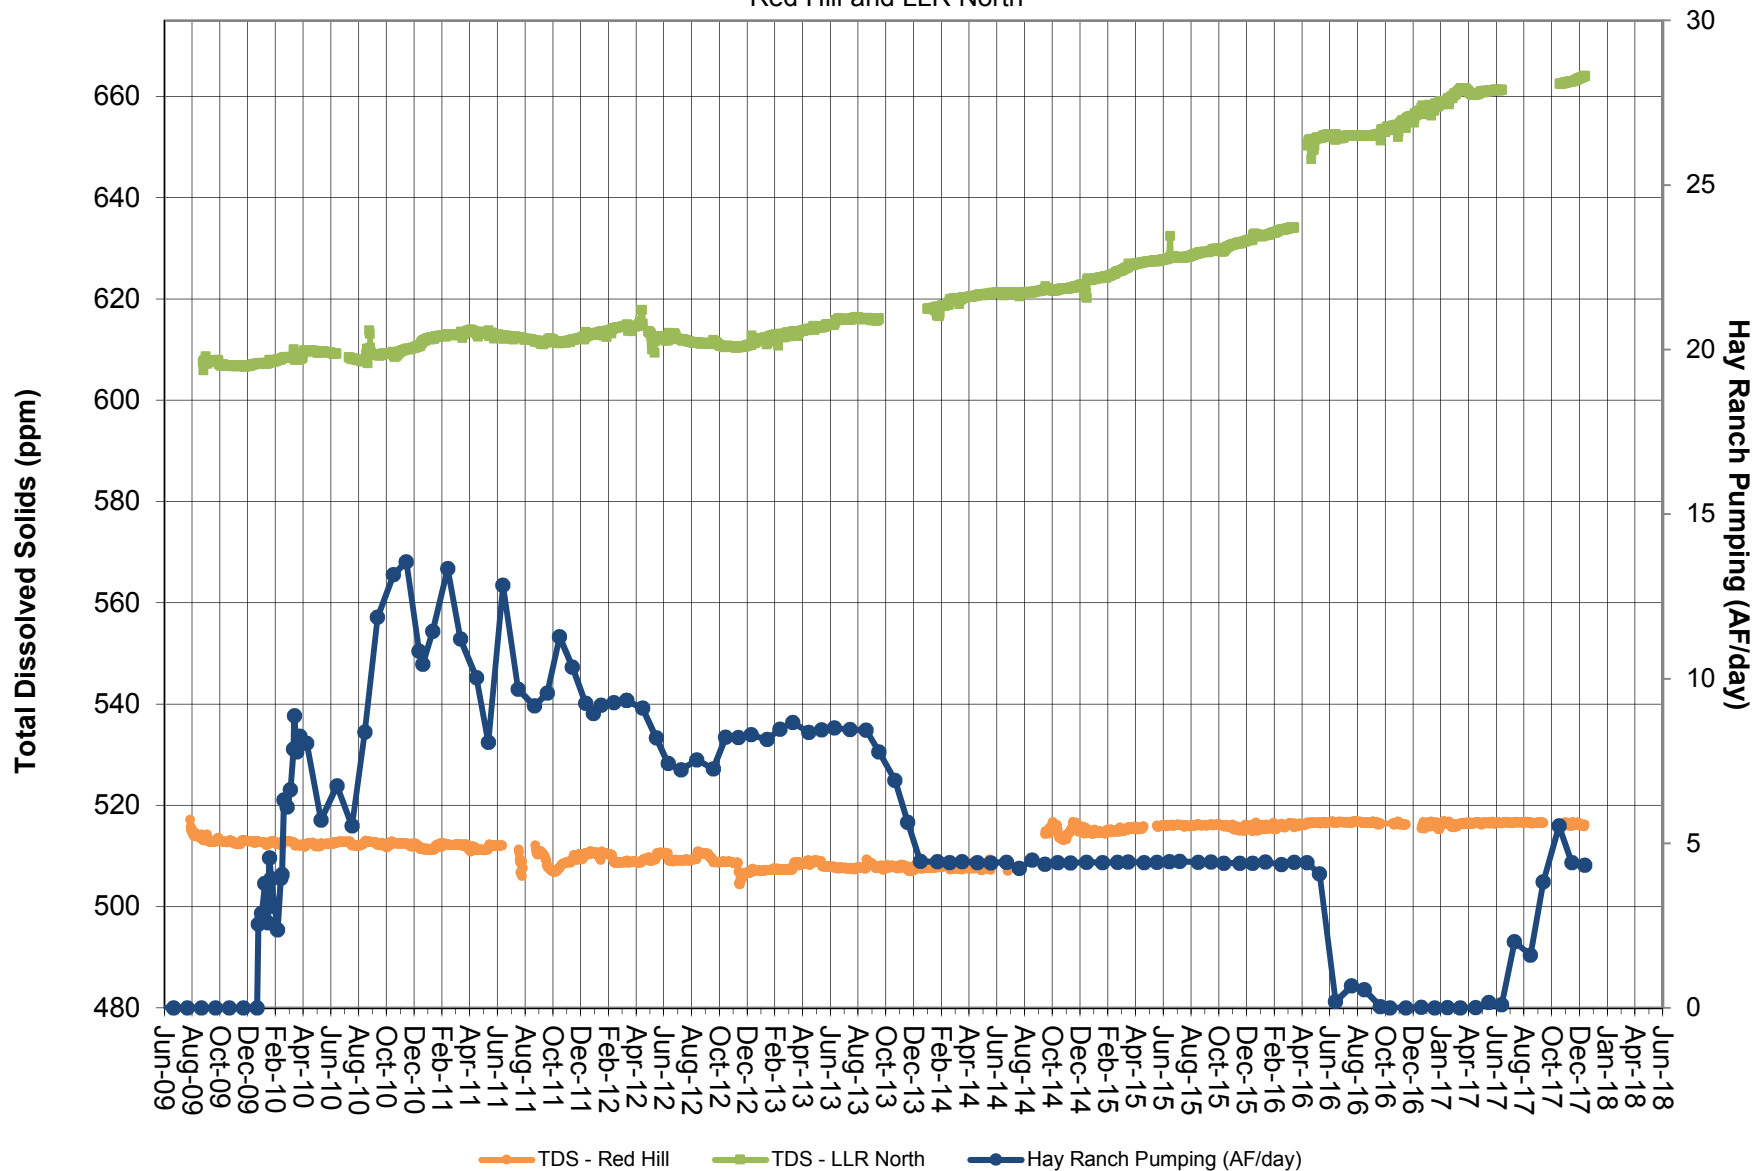

Note: TDS data from in-well transducers. Hay Ranch pumping is average acre feet per day.
Coso Operating initiated Hay Ranch Project pumping on 12/25/09.
Red Hill and LLR North data gaps due to transducer malfunction.

FIGURE 17
ACTUAL AND MAXIMUM ALLOWABLE TOTAL PUMPING AMOUNTS FOR HAY RANCH PROJECT

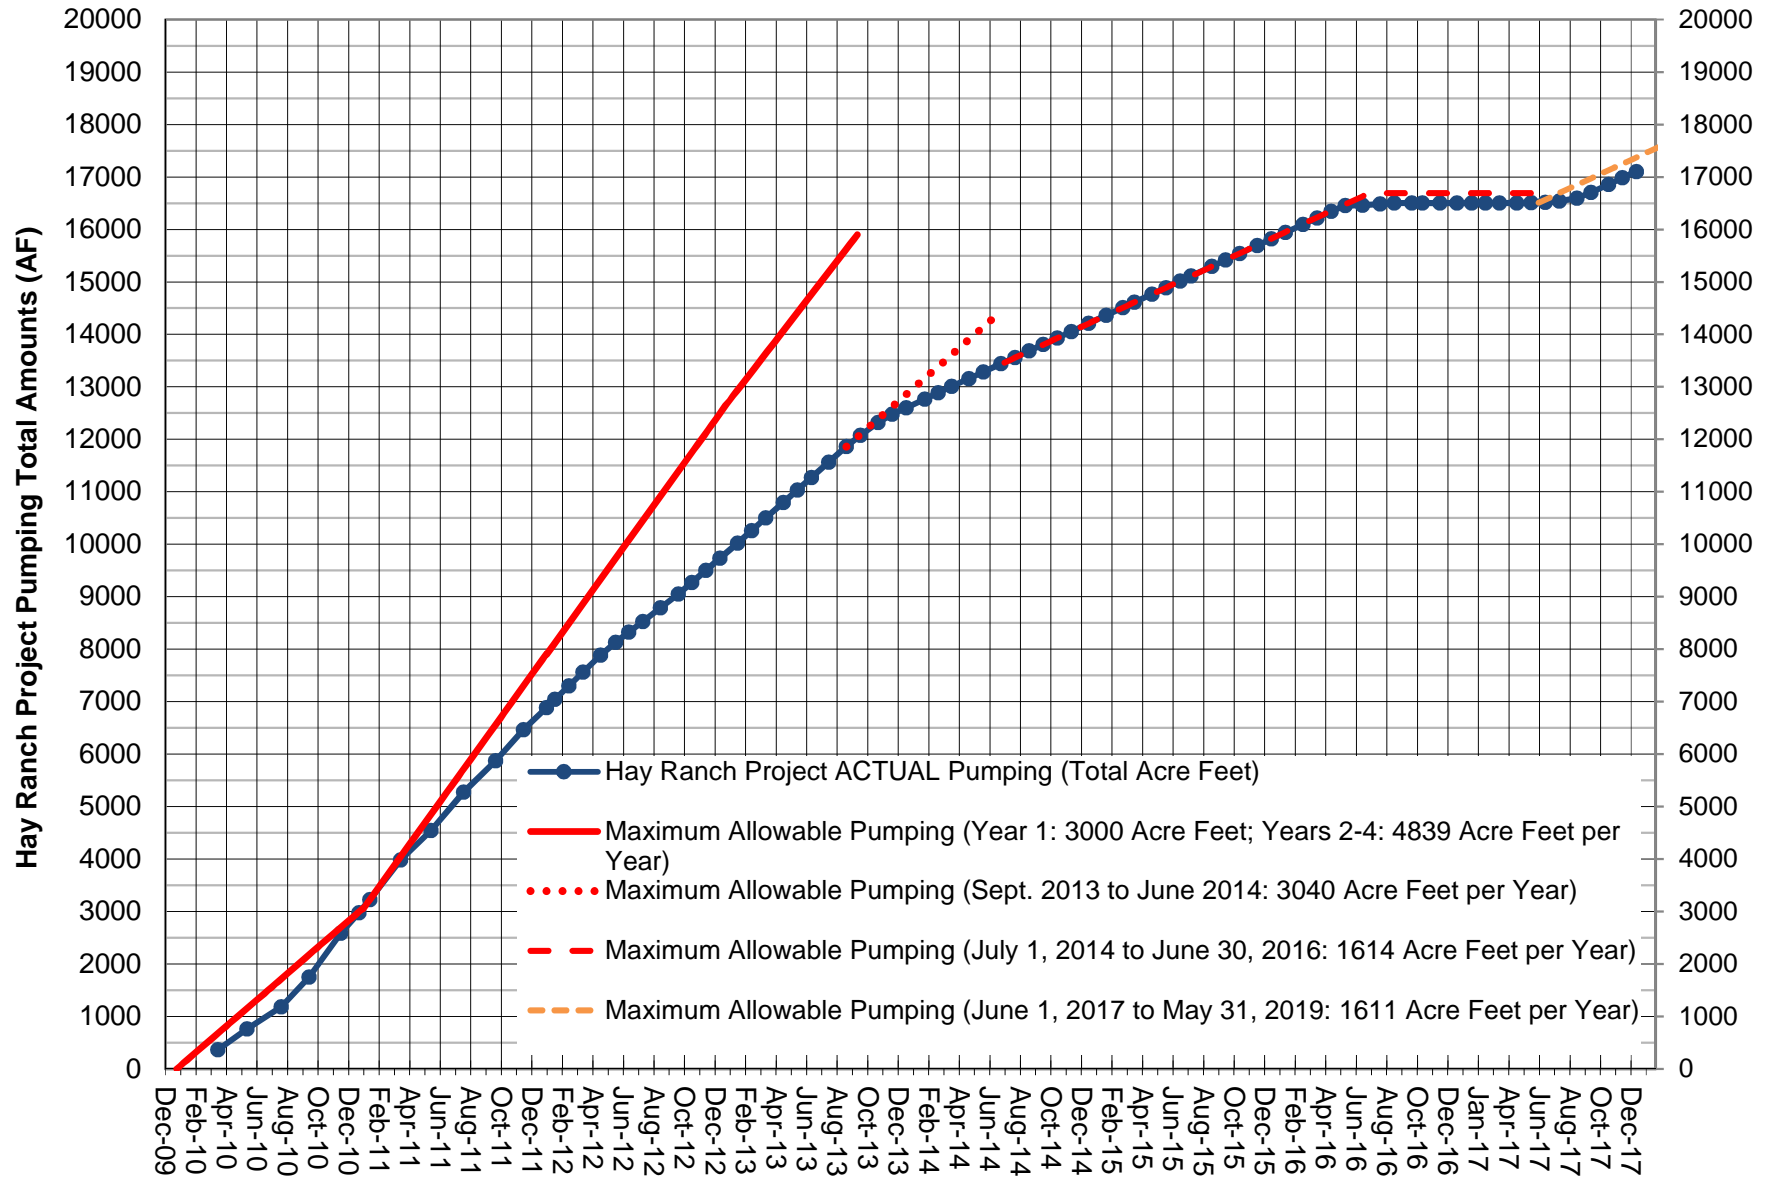

Note: Project pumping initiated 12/25/09. Maximum Allowable pumping rate was 3000 AF/yr for 12/09 to 12/10, 4839 AF/yr for 1/11-8/13, 3040 AF/yr for 9/13 to 6/14, 1614 AF/yr from 7/14 to 6/16 and 1611 AFY for 6/17 to 5/19.


APPENDIX A

HAY RANCH PROJECT CONDITIONAL USE PERMIT HYDROGRAPHS

Fourth Quarter 2017


**GROUNDWATER ELEVATION DATA
LONG-TERM (MANUAL READS)**

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV010 - Enchanted Village Well**

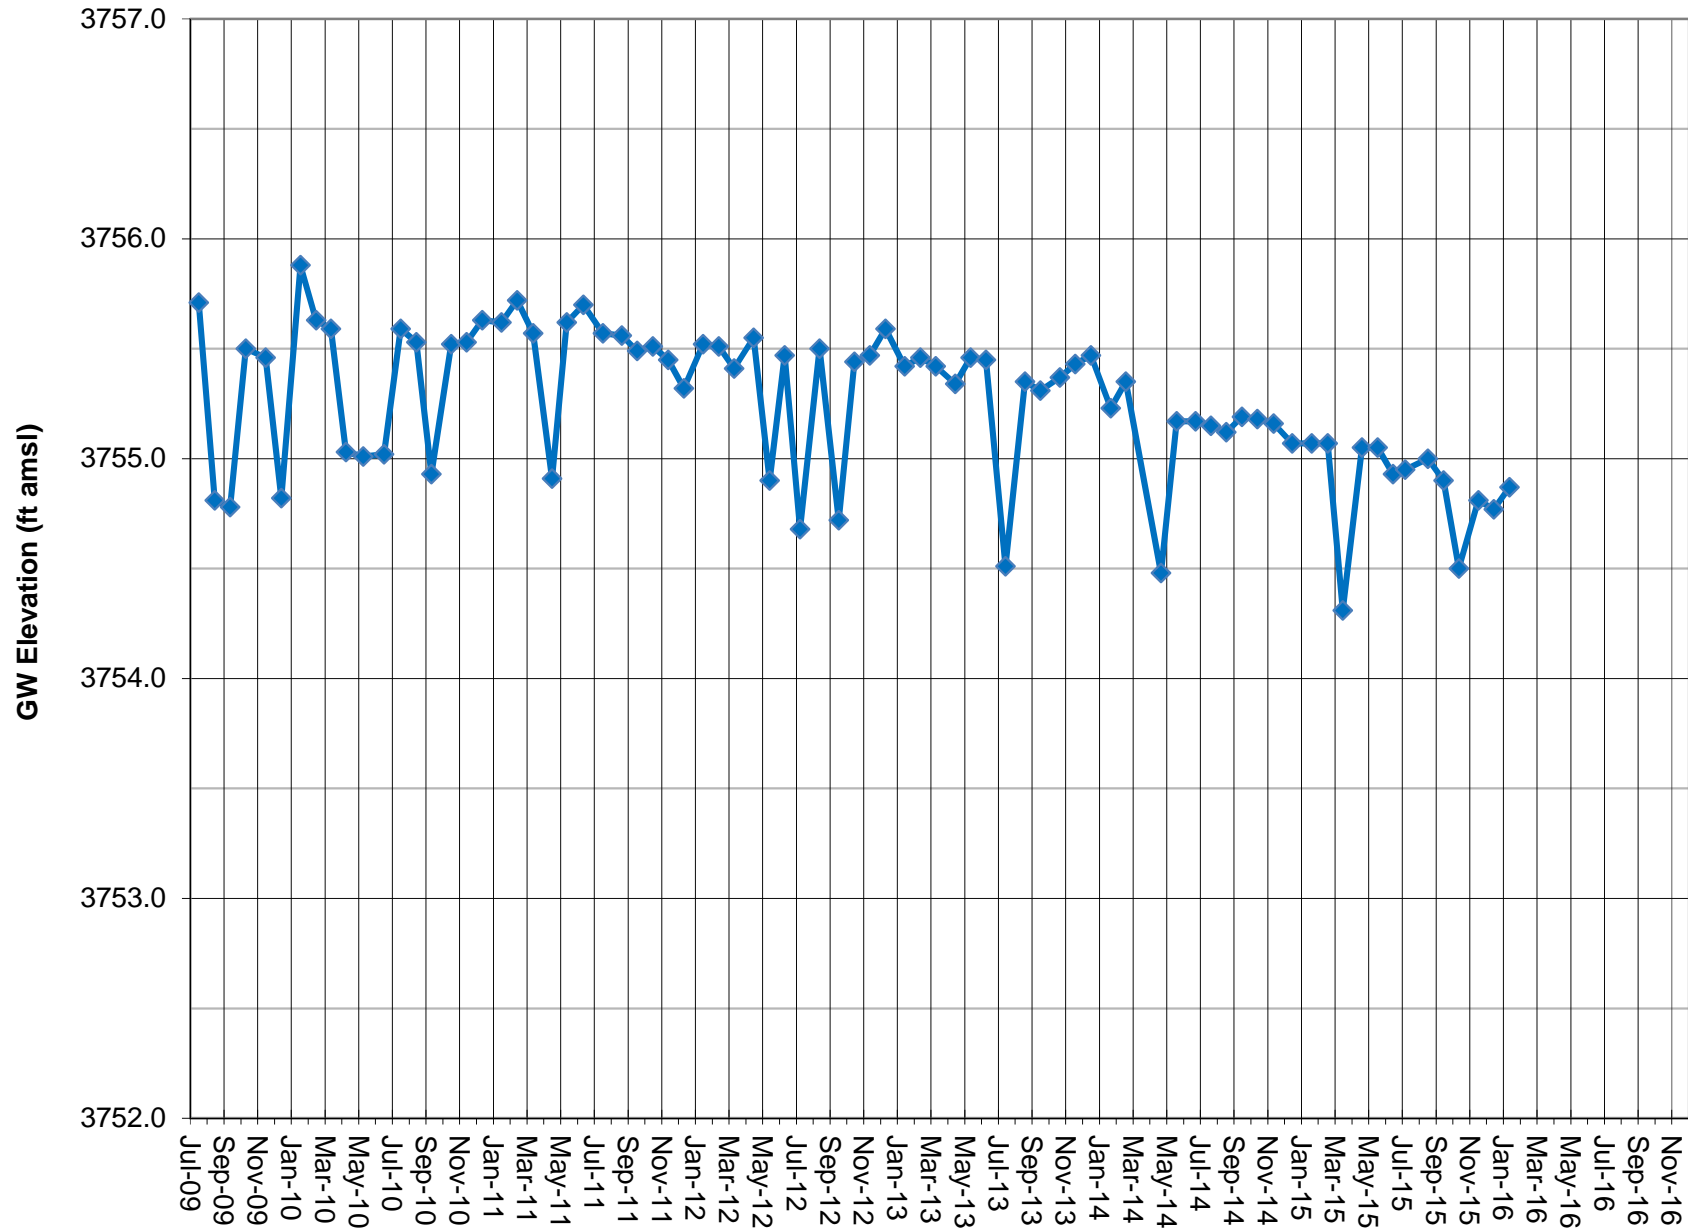


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Enchanted Village Well (Dews) is an actively pumped domestic supply well.
 Monitoring discontinued Feb. 2016 per ICWD

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV020 - LADWP 816 Well**

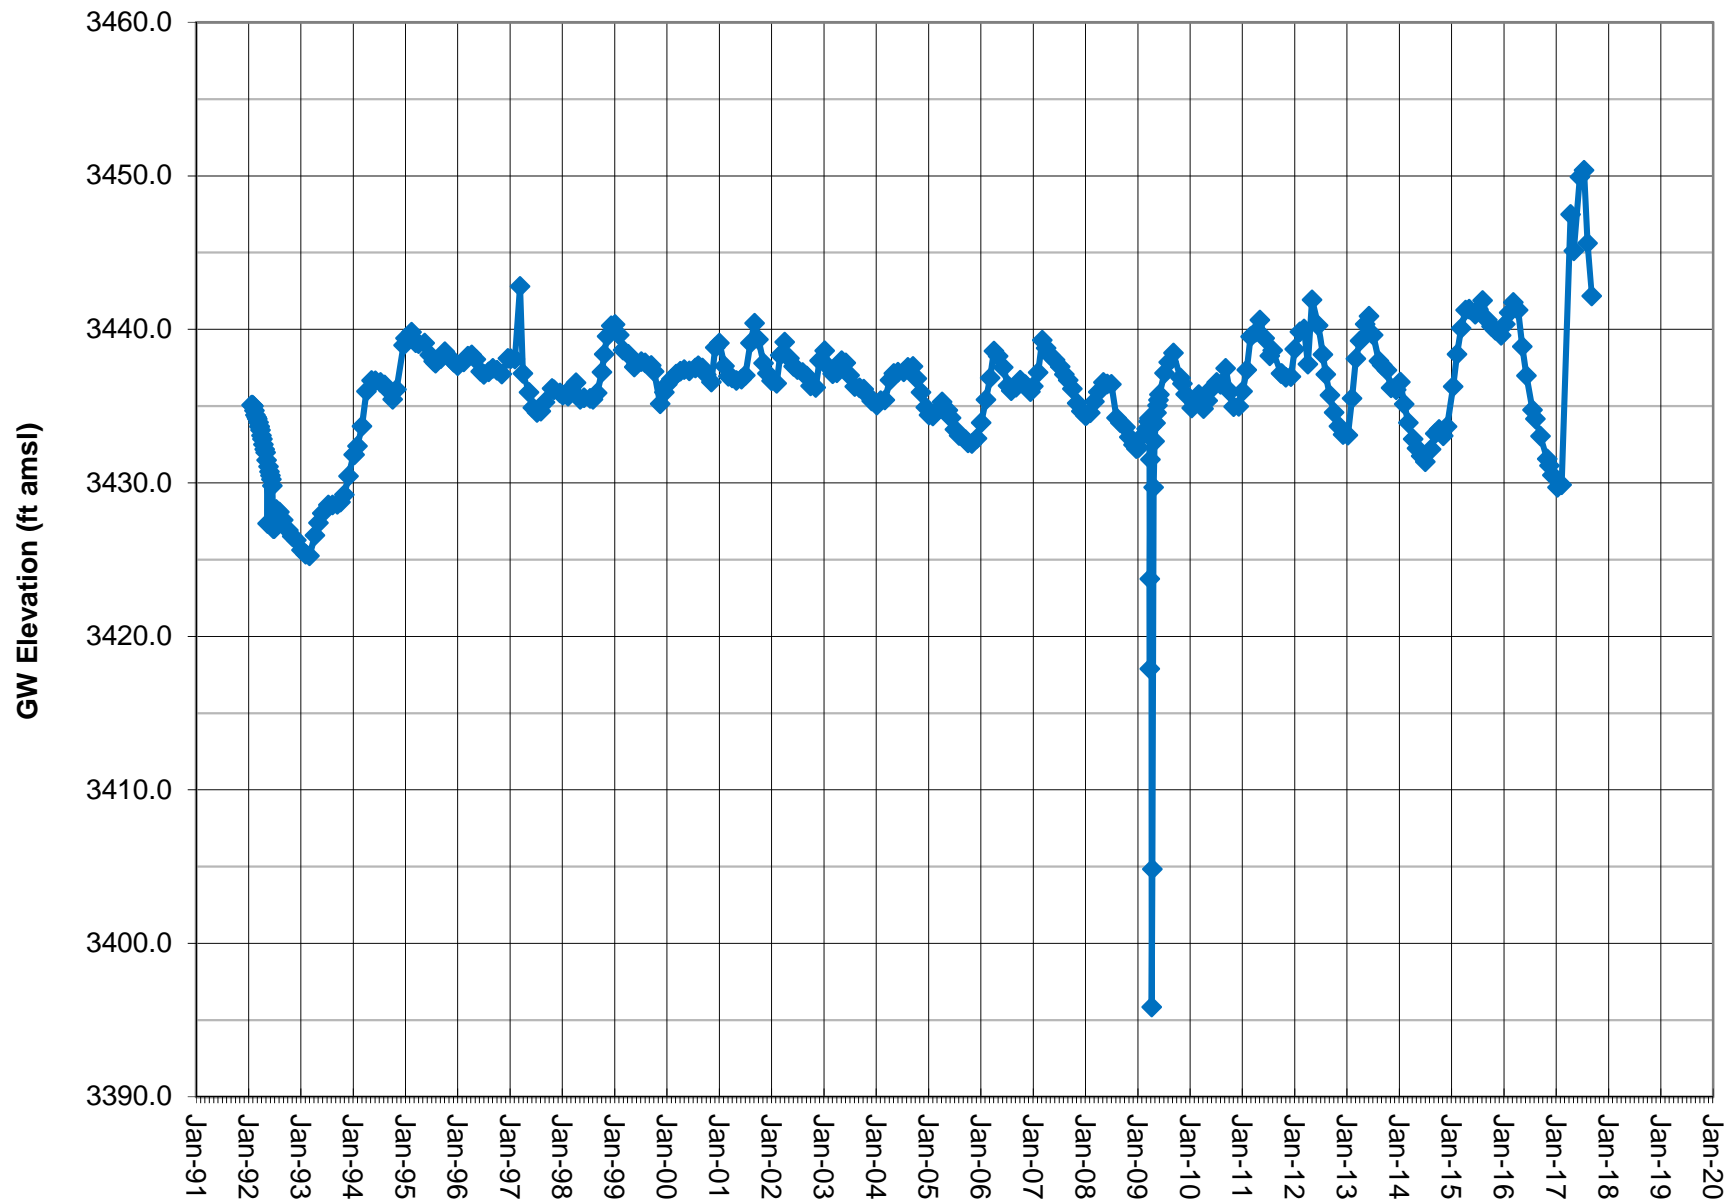


Note: Groundwater elevation data based on manual depth-to-water measurements.
 LADWP conducted a groundwater pump test on a nearby well in the first quarter 2009.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV030 - Cal Pumice Well**

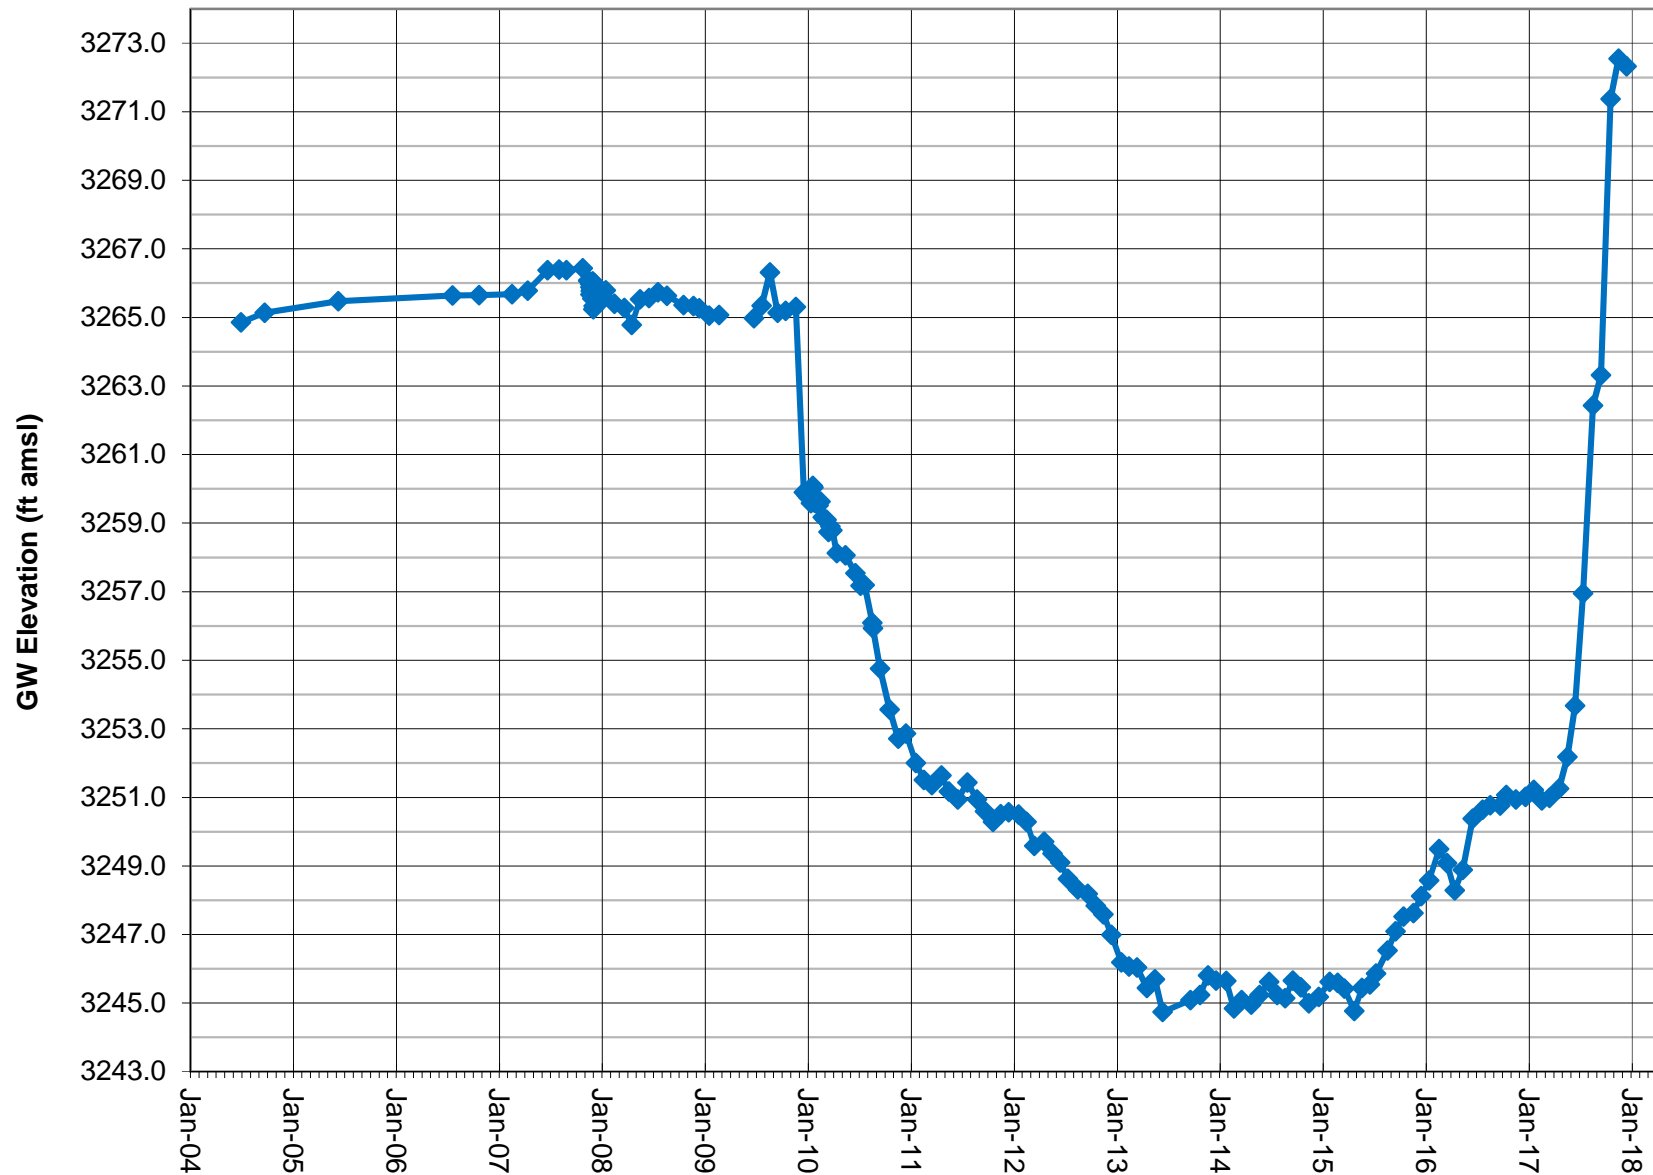


Note: A data gap exists in 2009 during a pump test on a nearby well.
 The notable DTW change in late 2009 was confirmed by in-well PT.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV040 - Dunmovin Well**

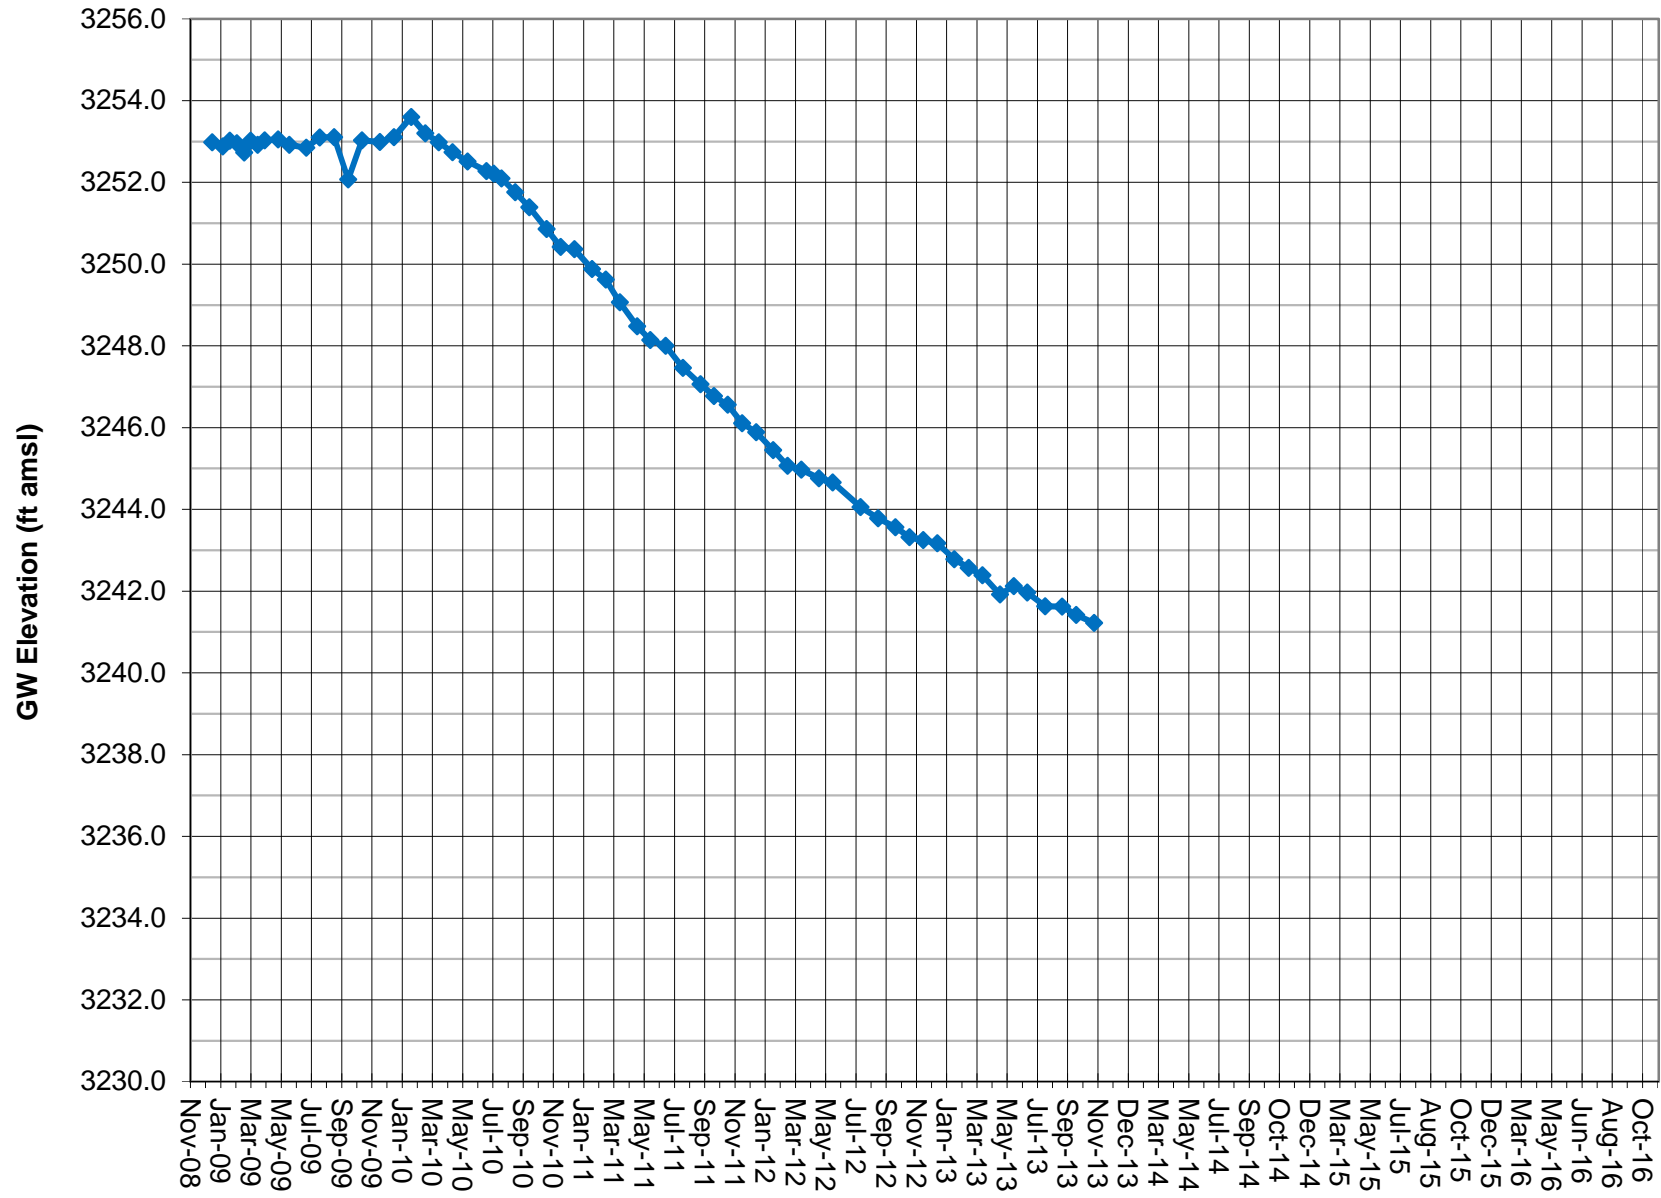


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Dunmovin Well is an active domestic supply well.
 Monitoring discontinued in October 2013 due to new in-well infrastructure.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV060 - Hay Ranch 1A Well**

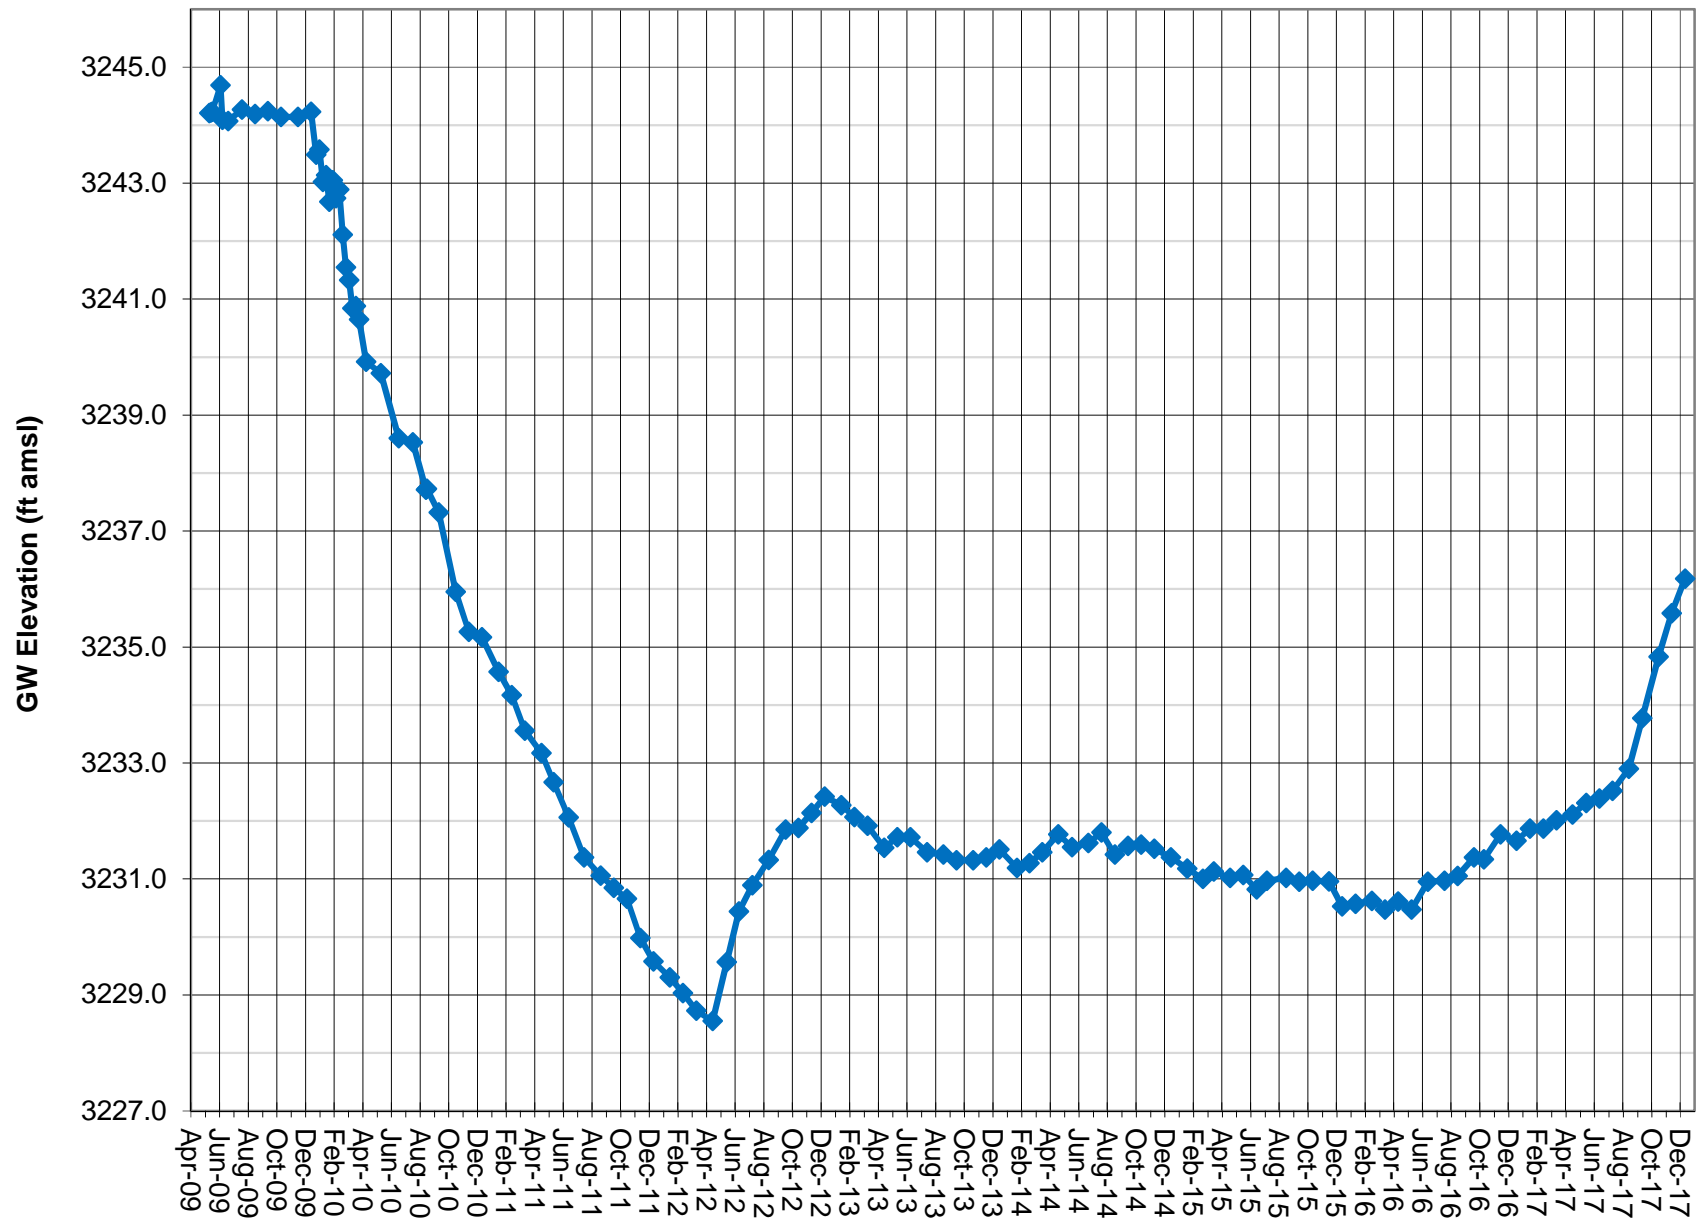


Note: Groundwater elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 Screened interval is 170-260 feet.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV061 - Hay Ranch 1B Well**

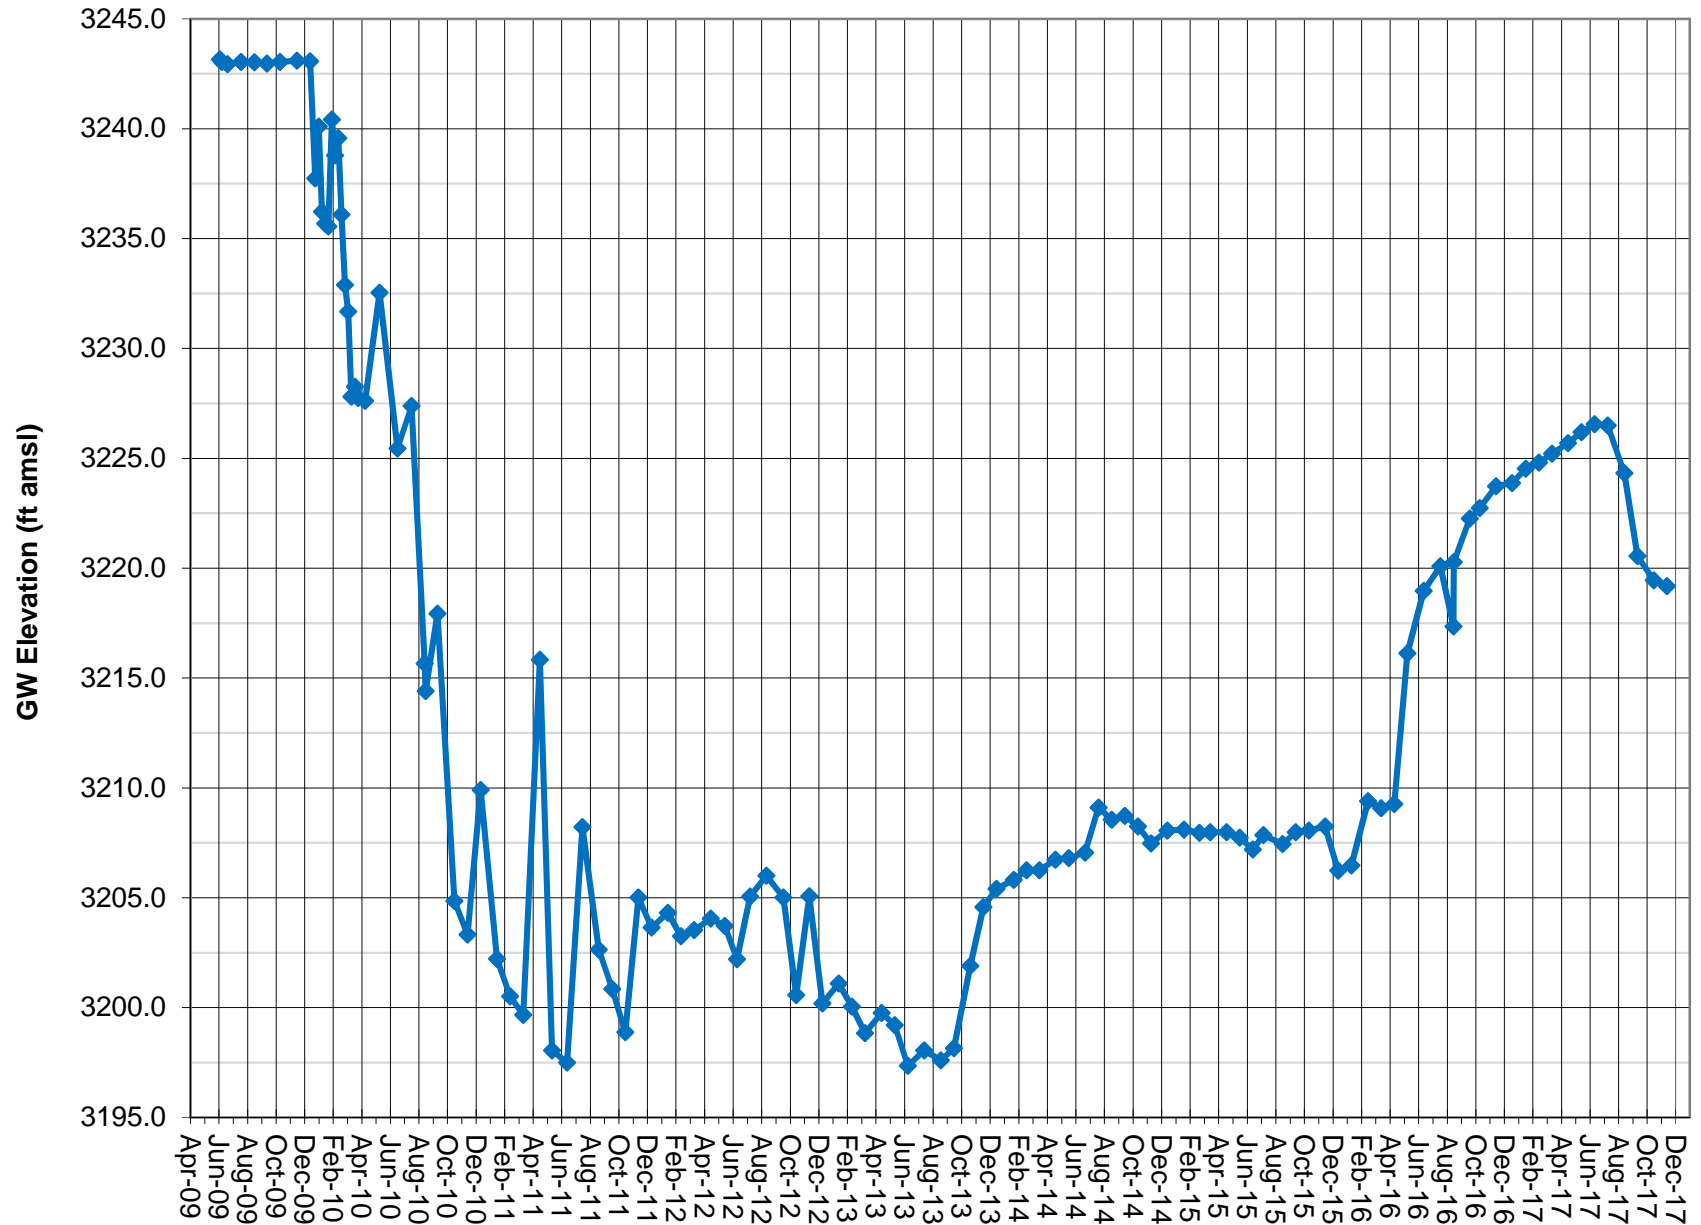


Note: Groundwater elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 Screened interval is 490-540 feet.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV062 - Hay Ranch 1C Well**

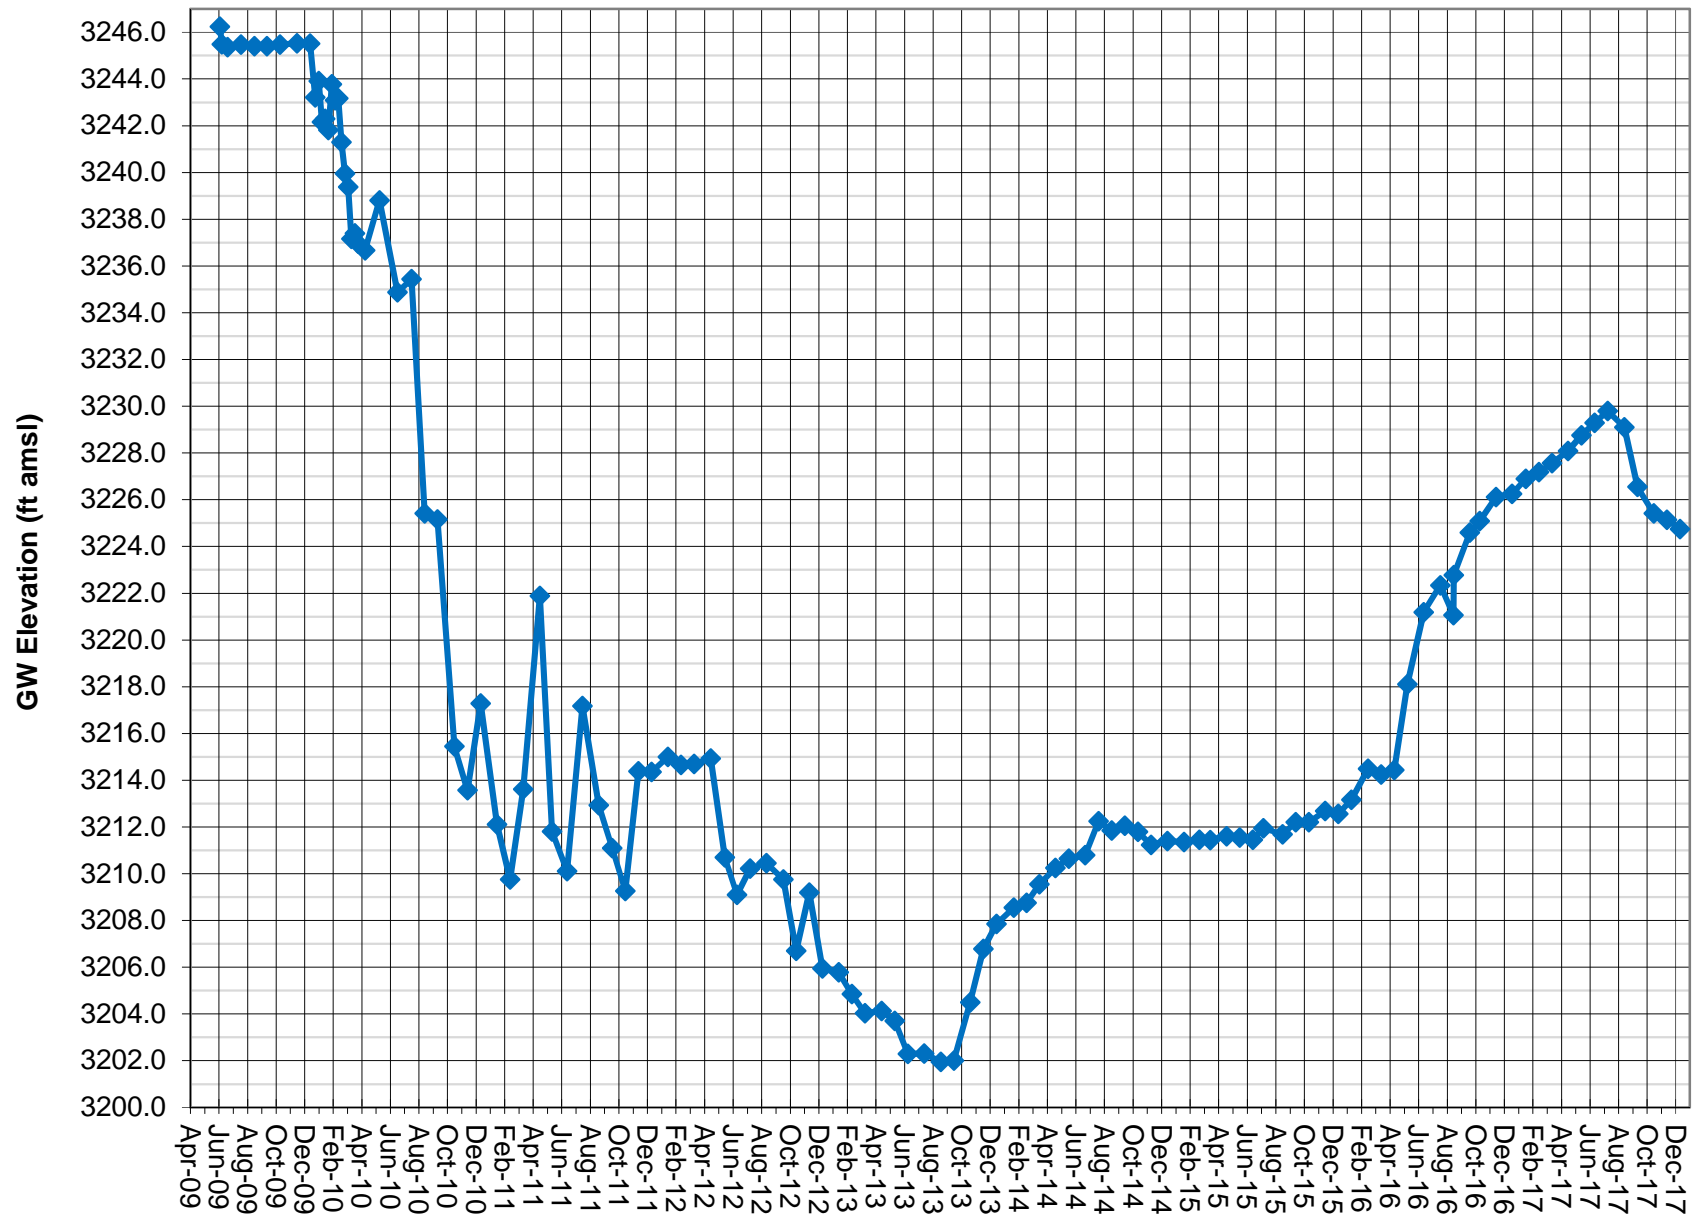


Note: Groundwater elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 Screened interval is 340-405 feet.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV080- Hay Ranch 2A Well**

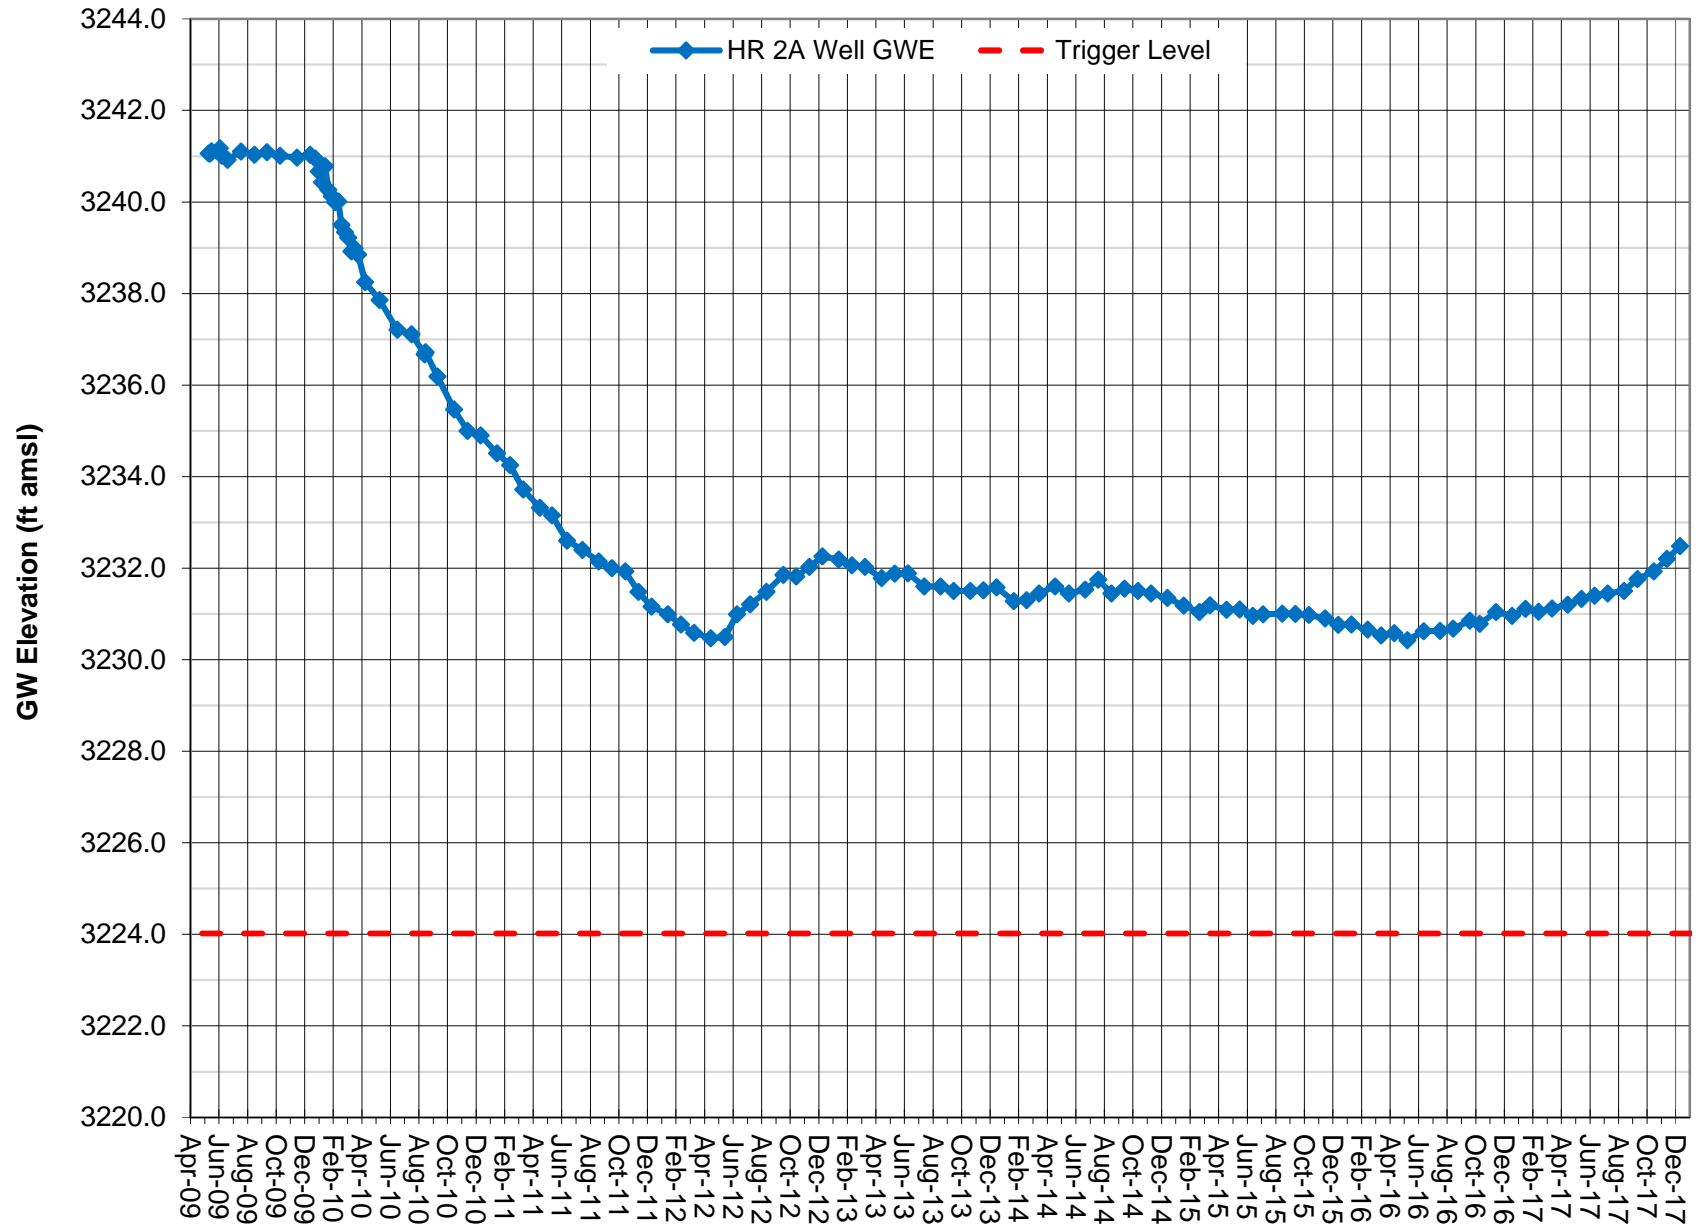


Note: Groundwater elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 Screened interval is 180-300 feet.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV081 - Hay Ranch 2B Well**

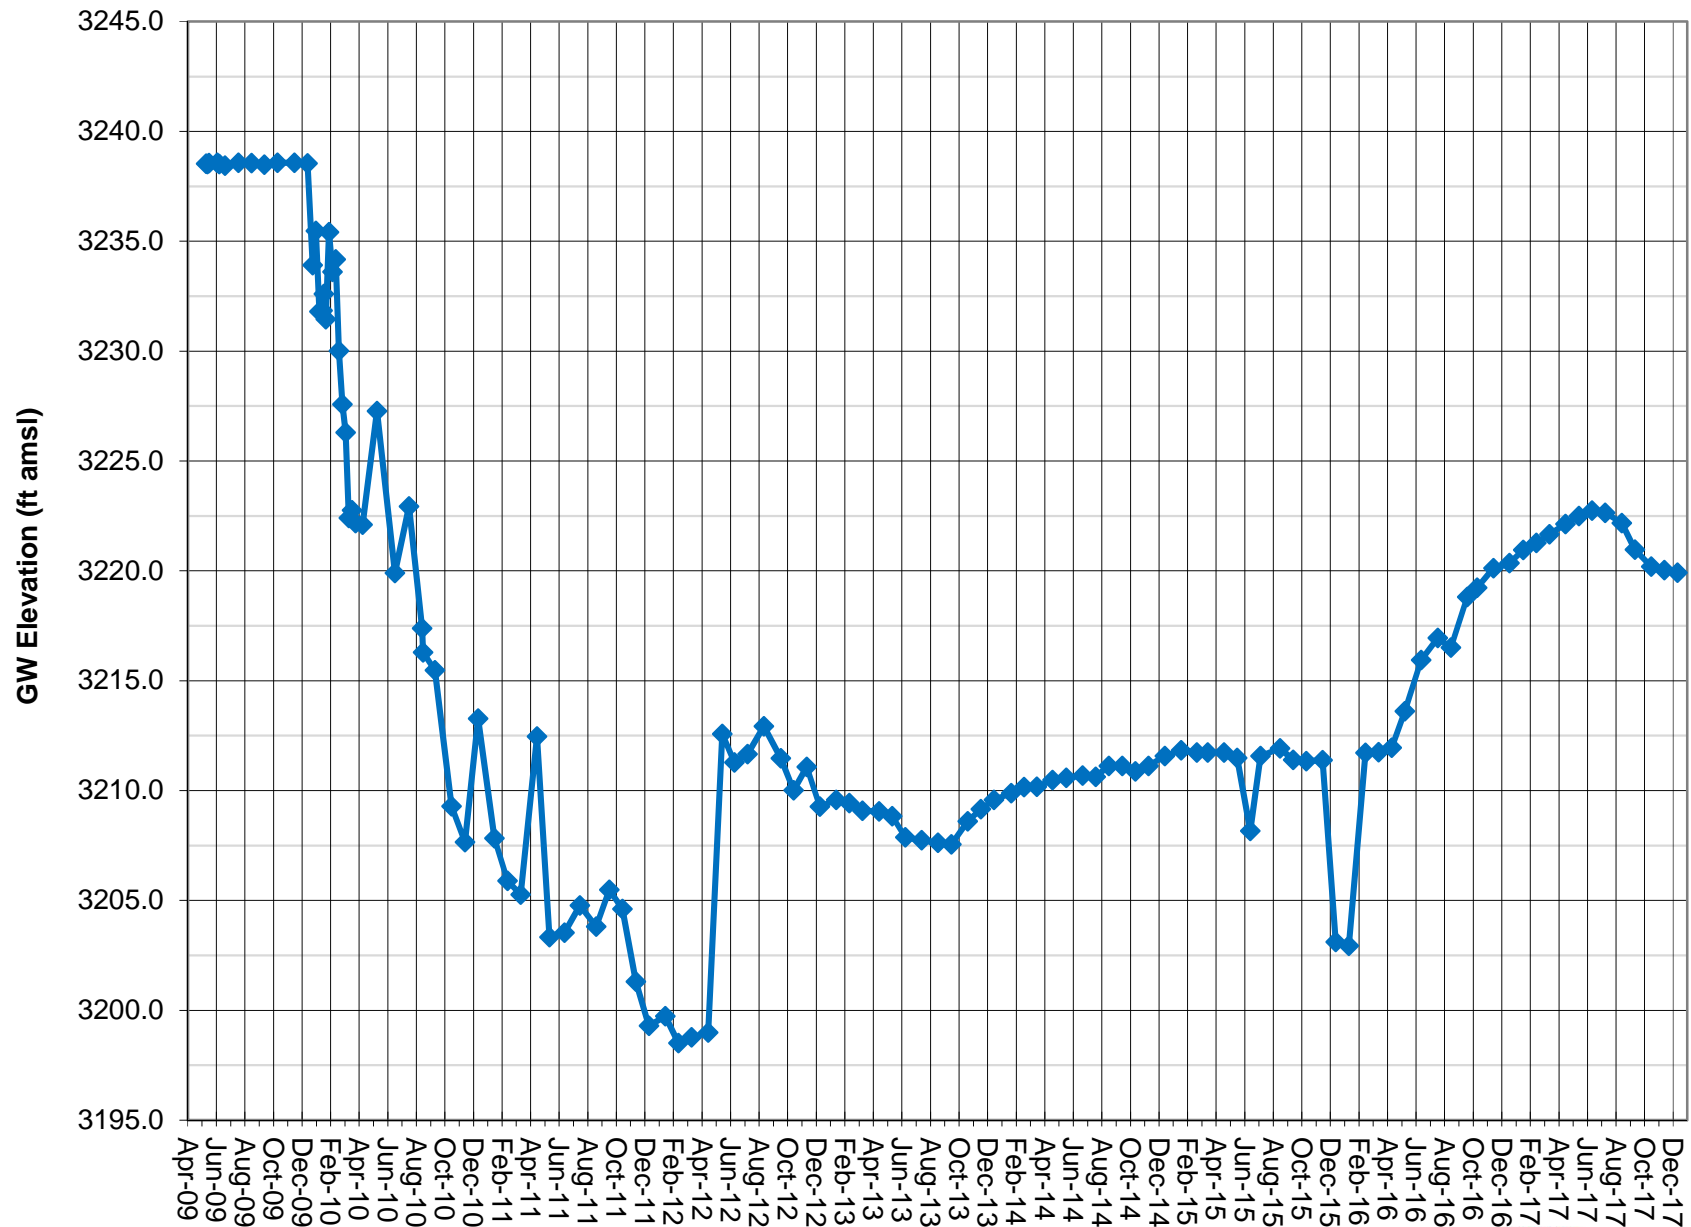


Note: Groundwater elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 Screened interval is 519-584 feet.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV082 - Hay Ranch 2C Well**

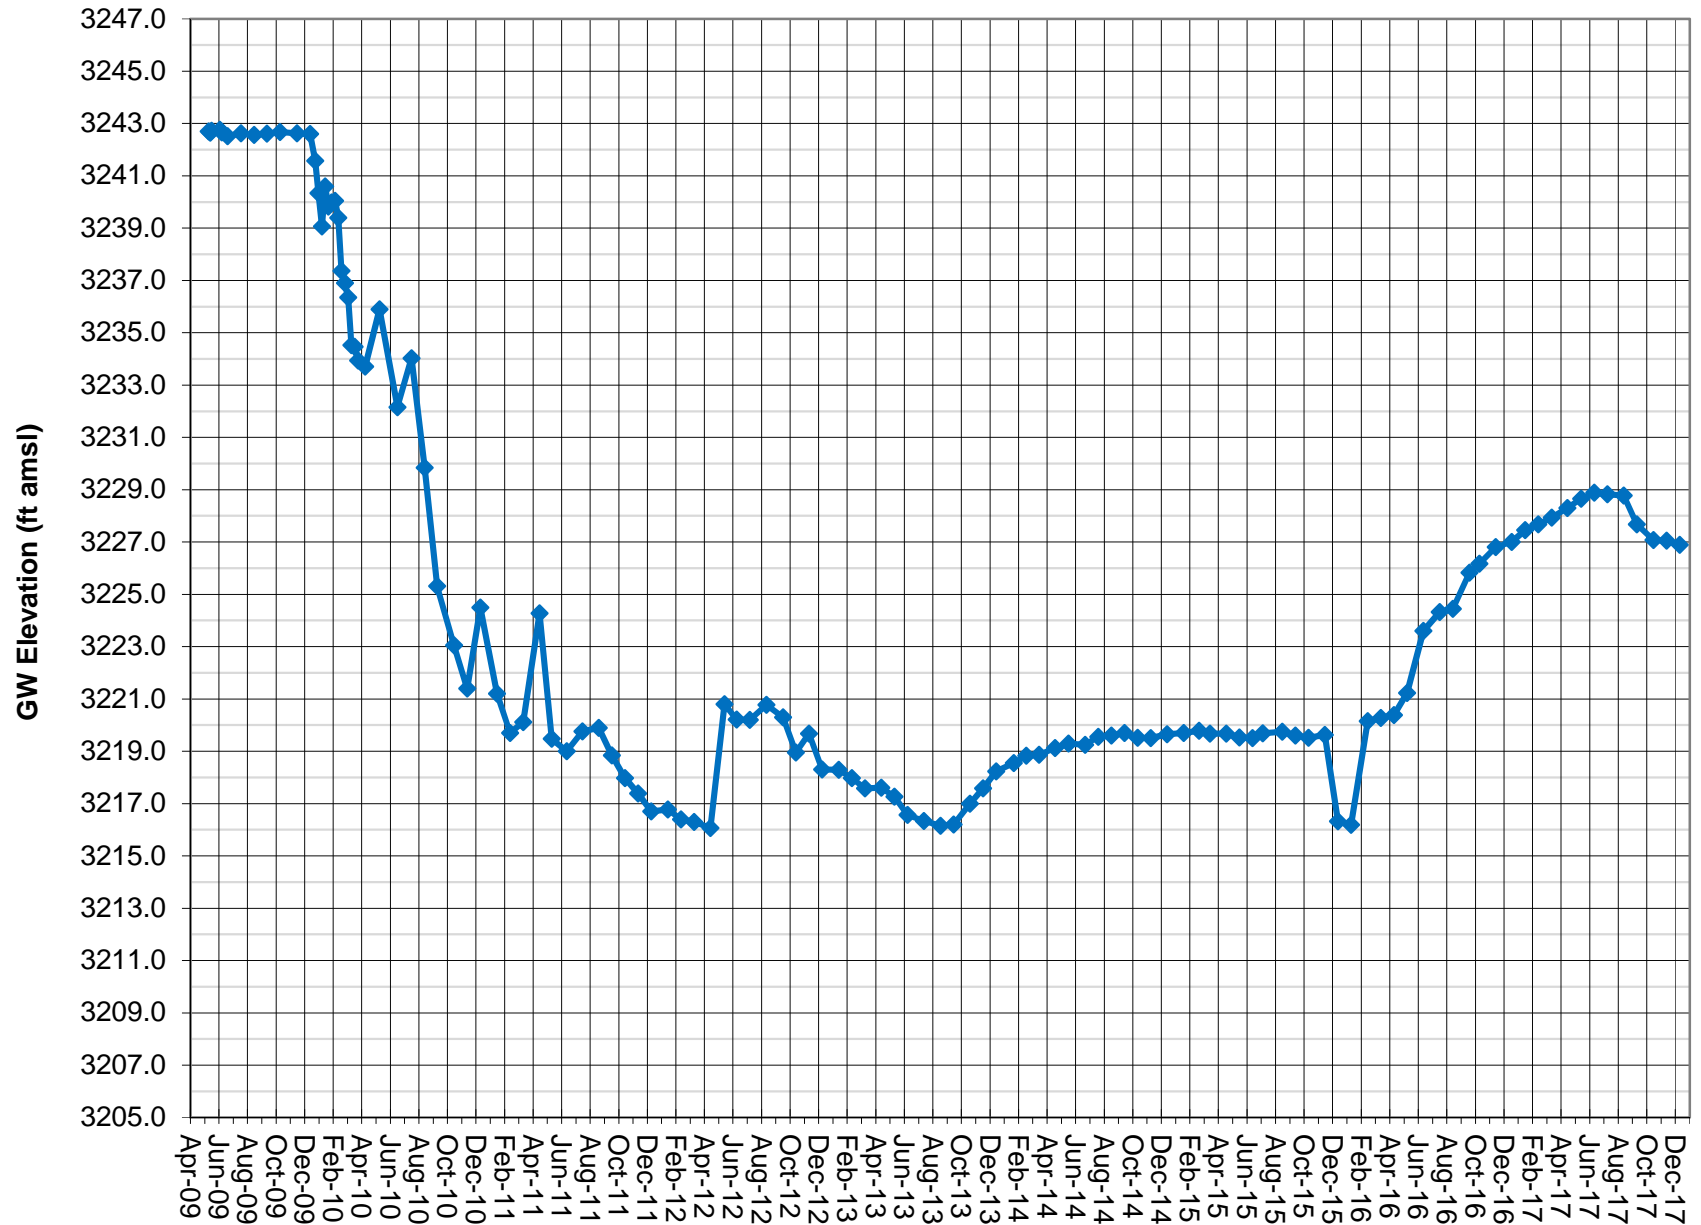


Note: Groundwater elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 Screened interval is 370-420 feet.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV090 - Coso Junction Ranch Well**

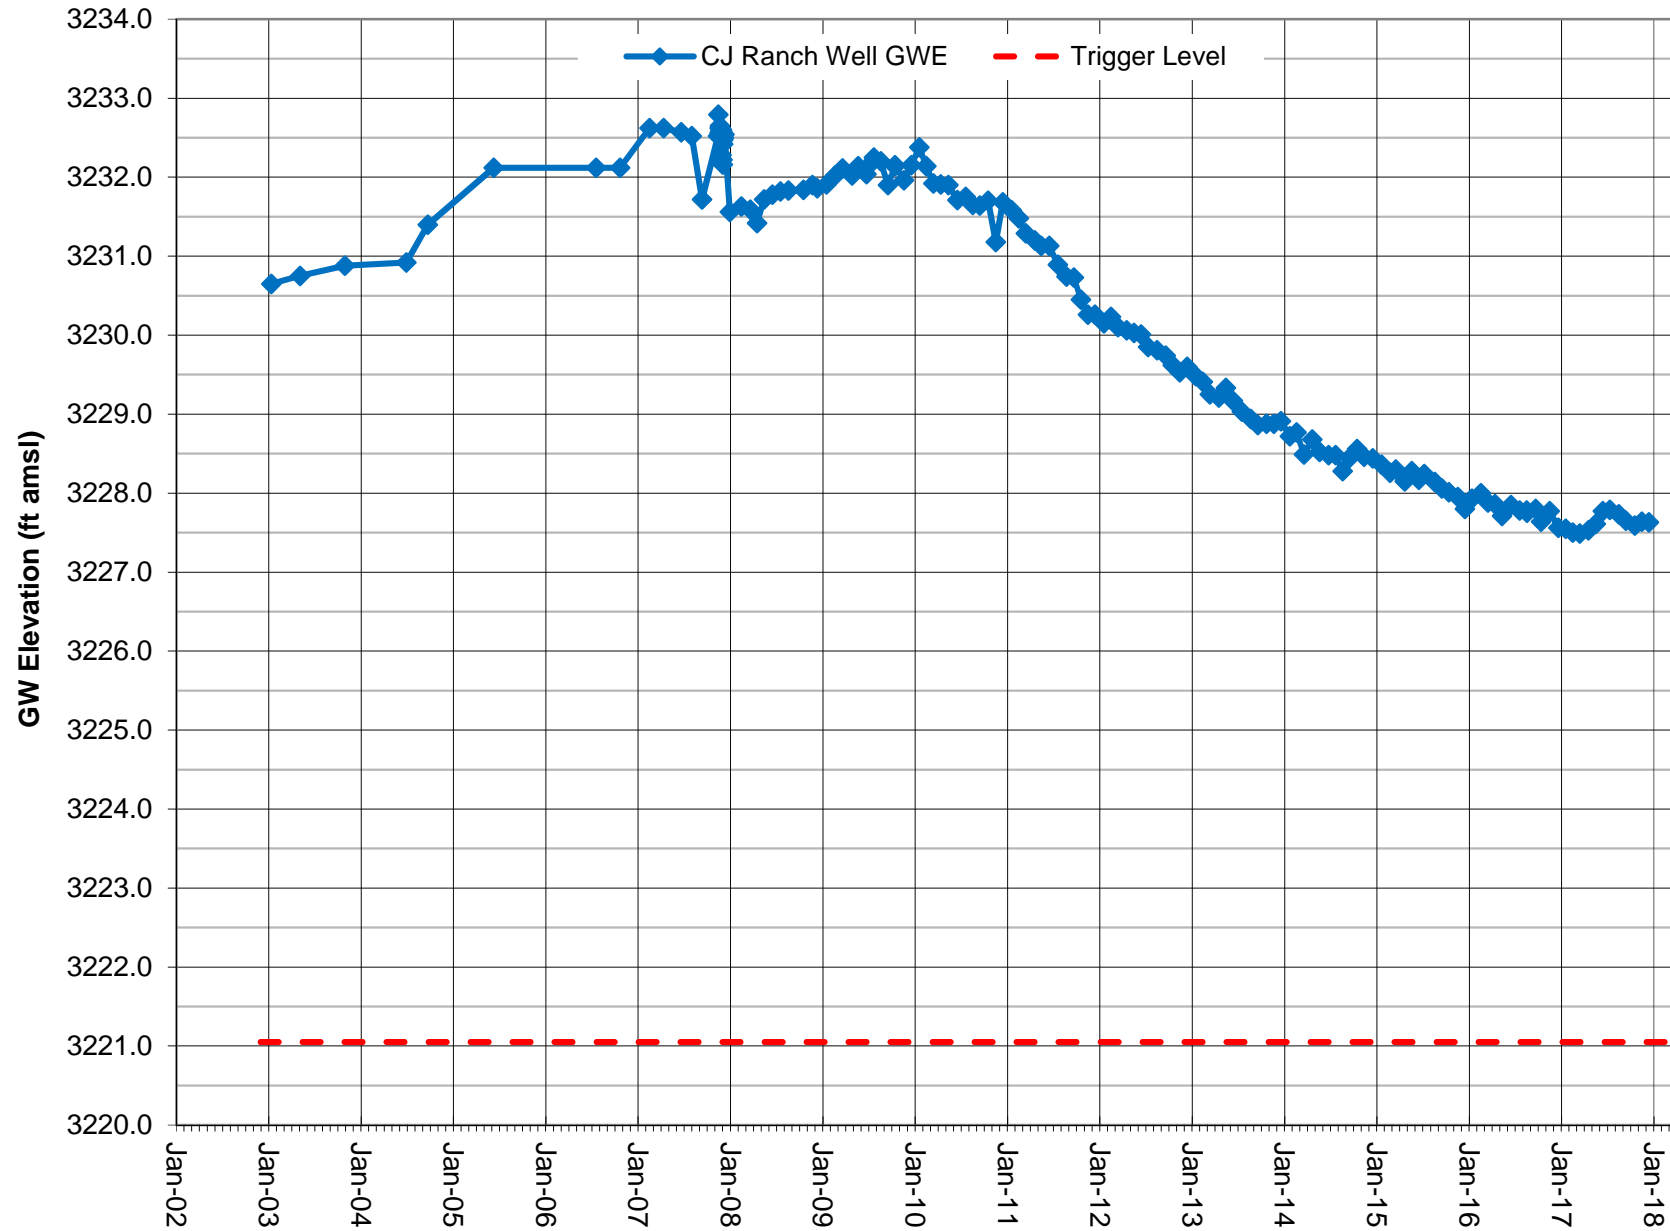


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Coso Operating Co. conducted a pump test on the Hay Ranch South Well in fourth quarter 2007.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV100 - Coso Junction Store #1 Well**

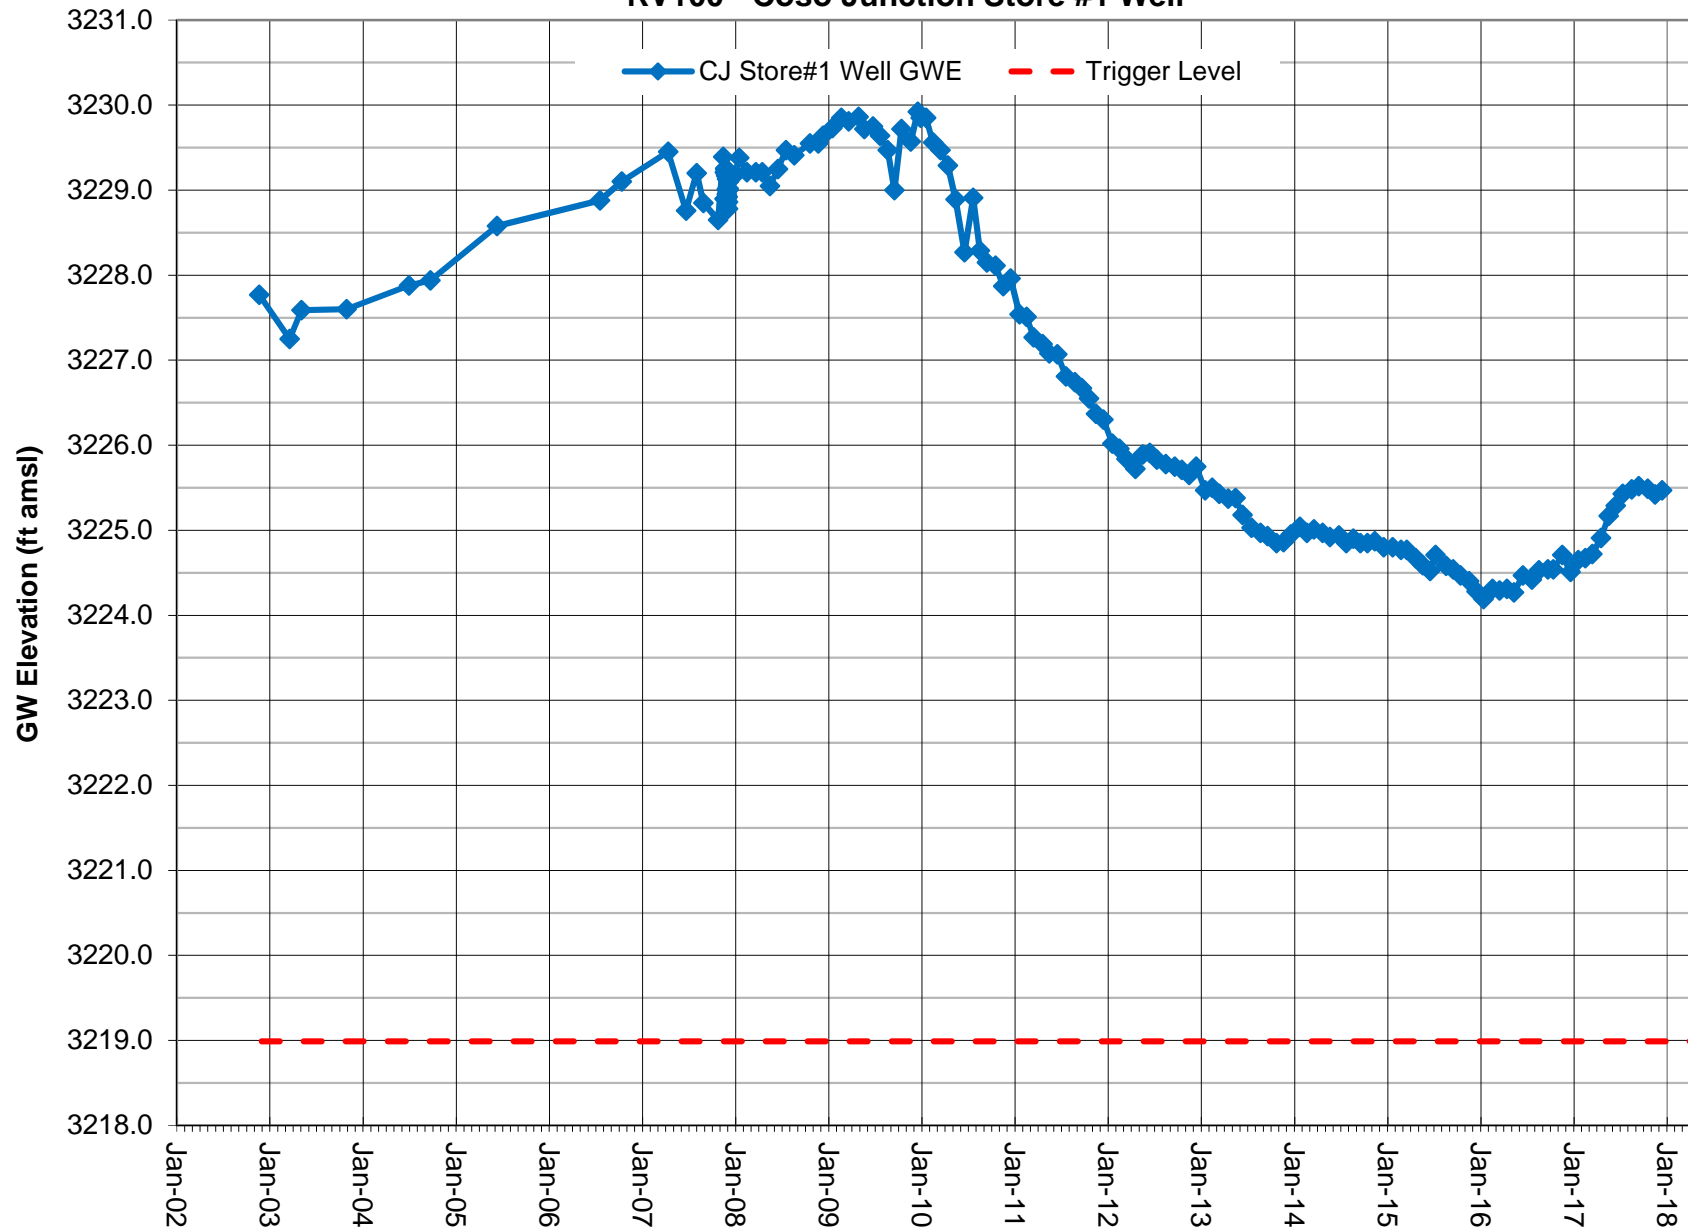


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Well is adjacent to actively pumped domestic well.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV110 - Davis Ranch North Well**

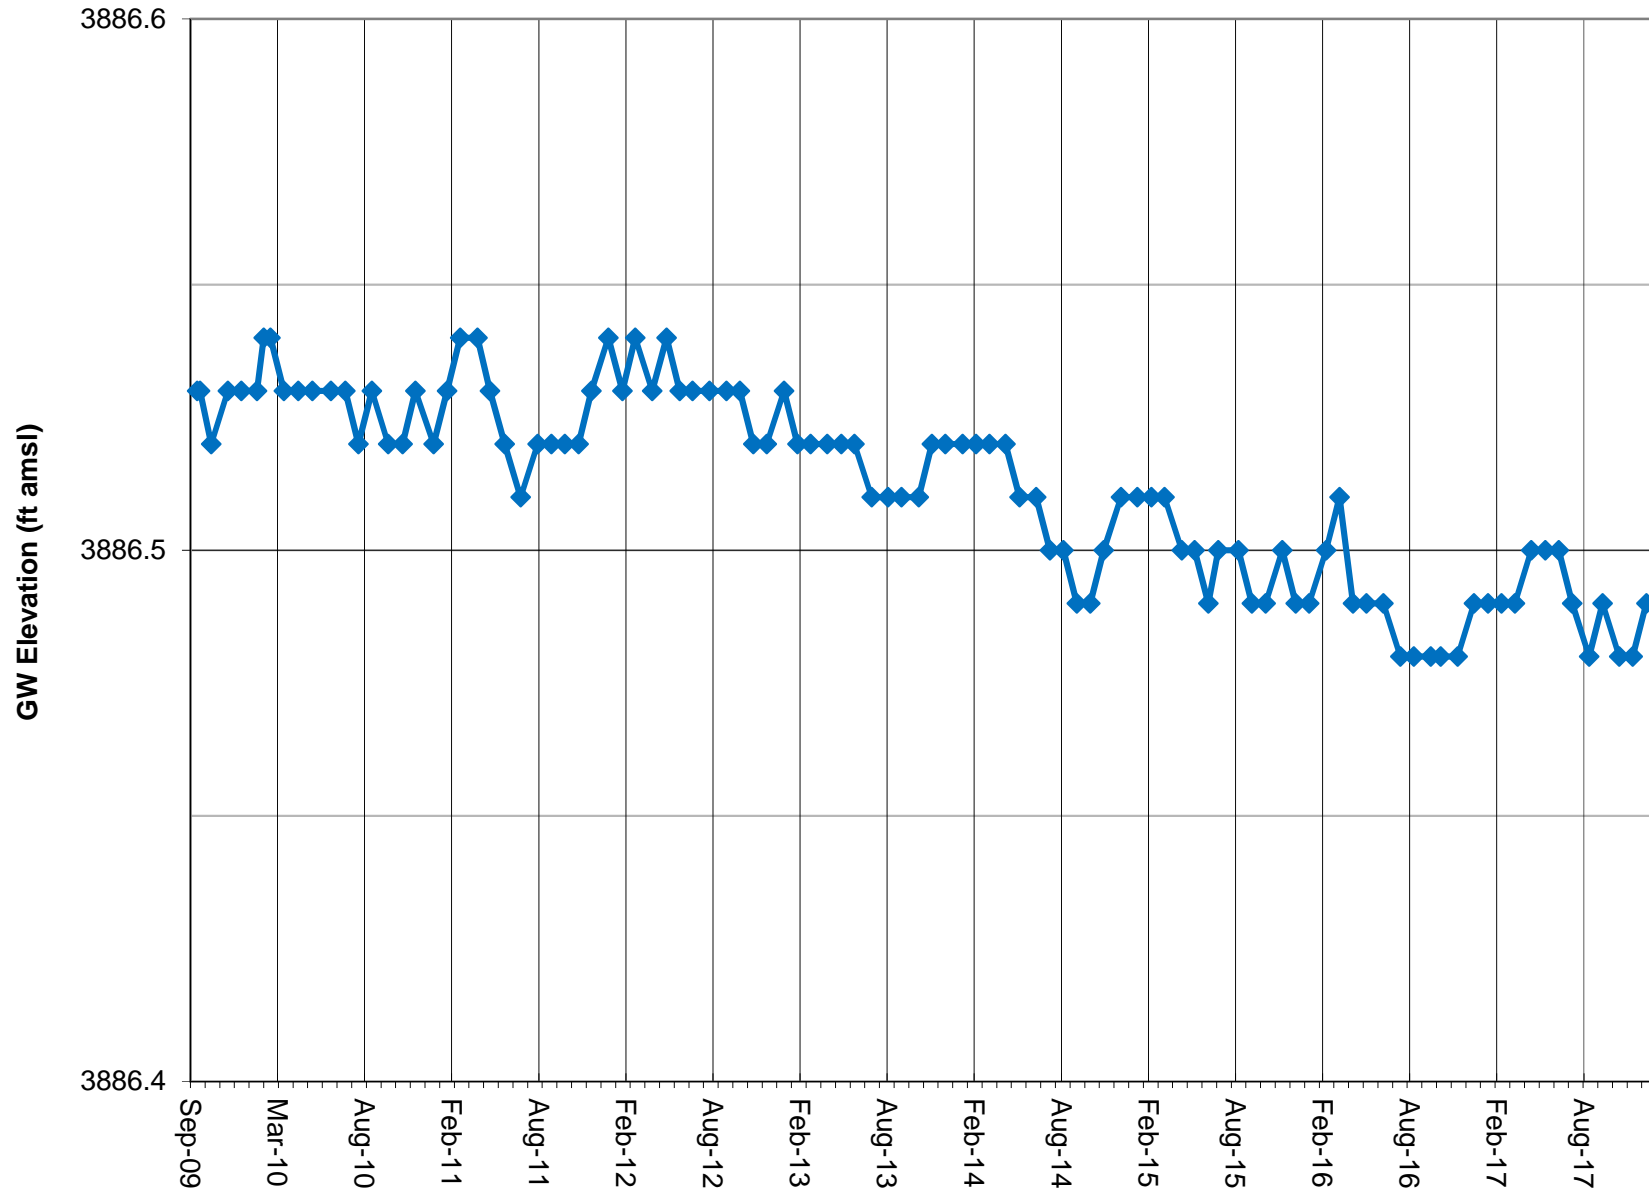


Note: Groundwater elevation data based on manual depth-to-water measurements.
 DTW measured to .01 foot; GWE calculated using approximate surface elevation.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV111 - Davis Ranch South Well**

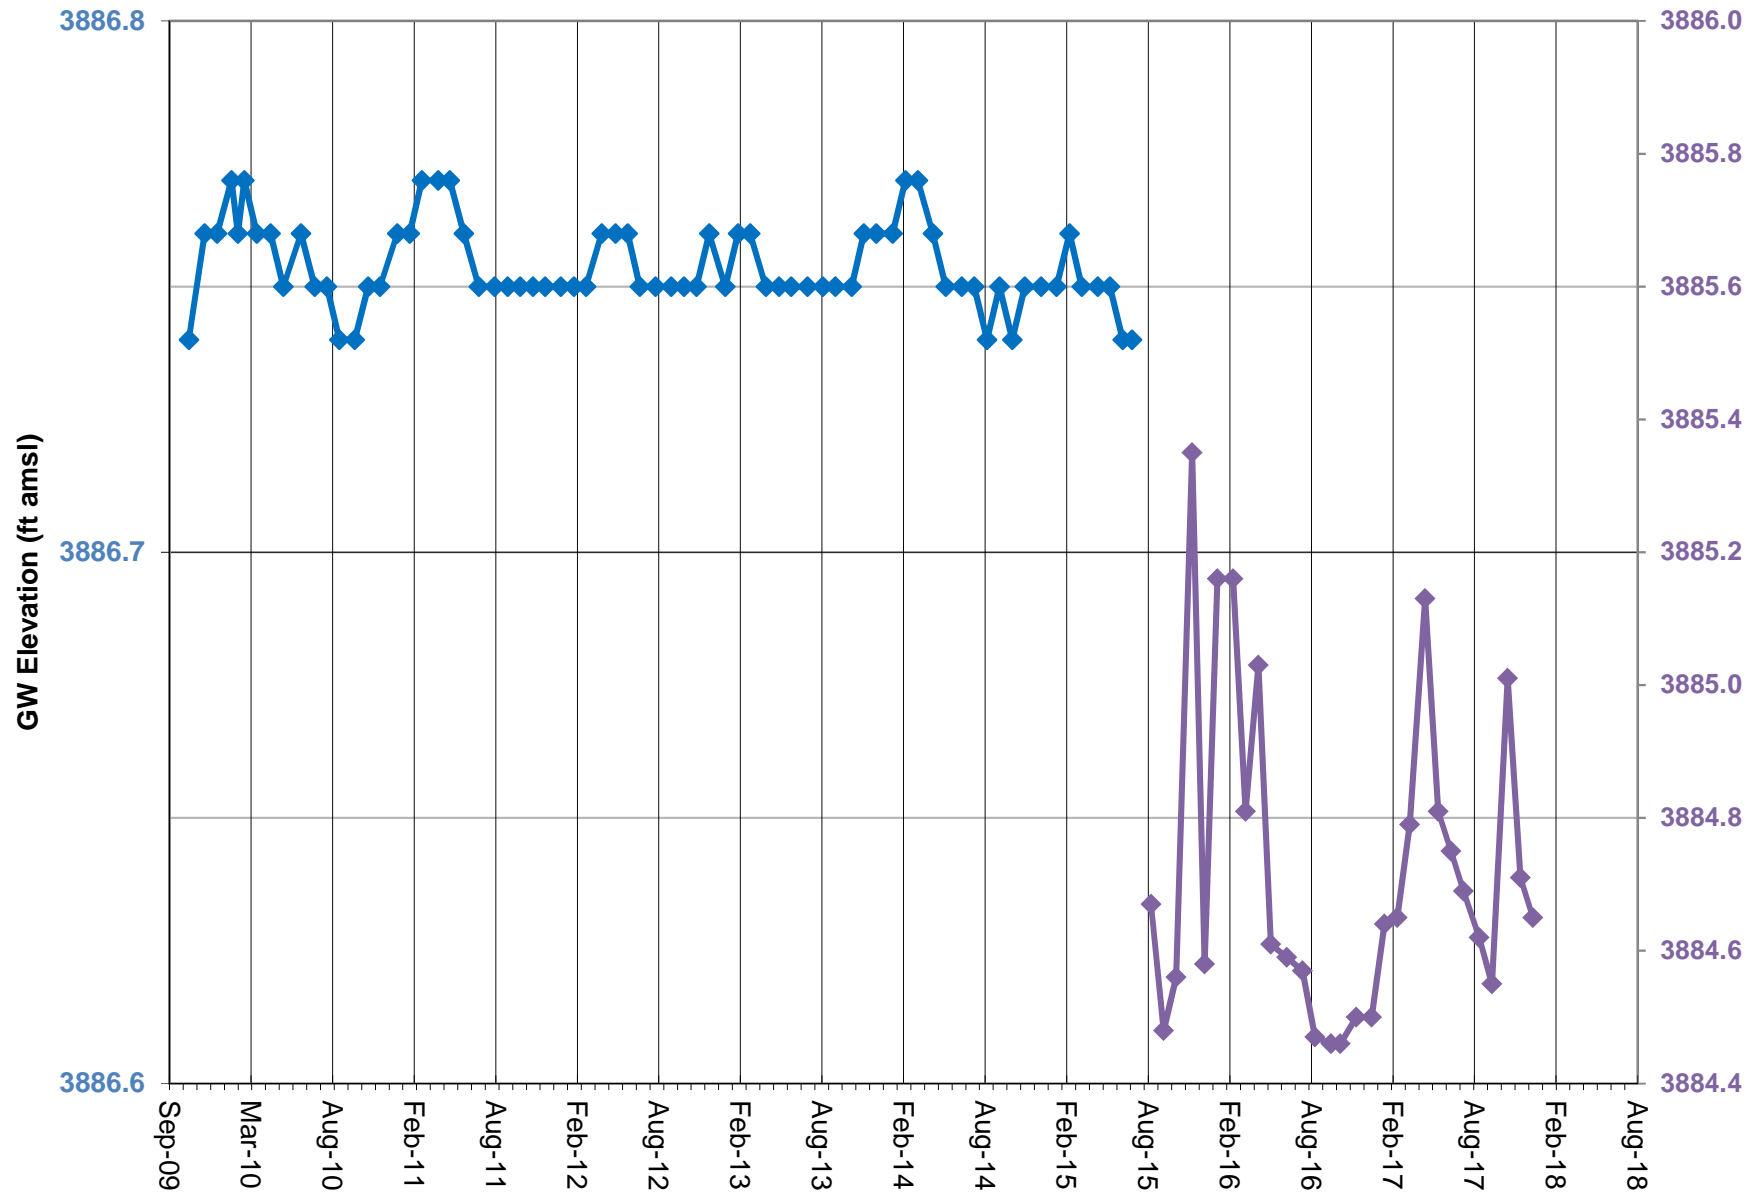


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Water-supply pump installed in DR South in July 2015.
 Note secondary axis for GWEs post-pump installation.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV120 - Red Hill Well**

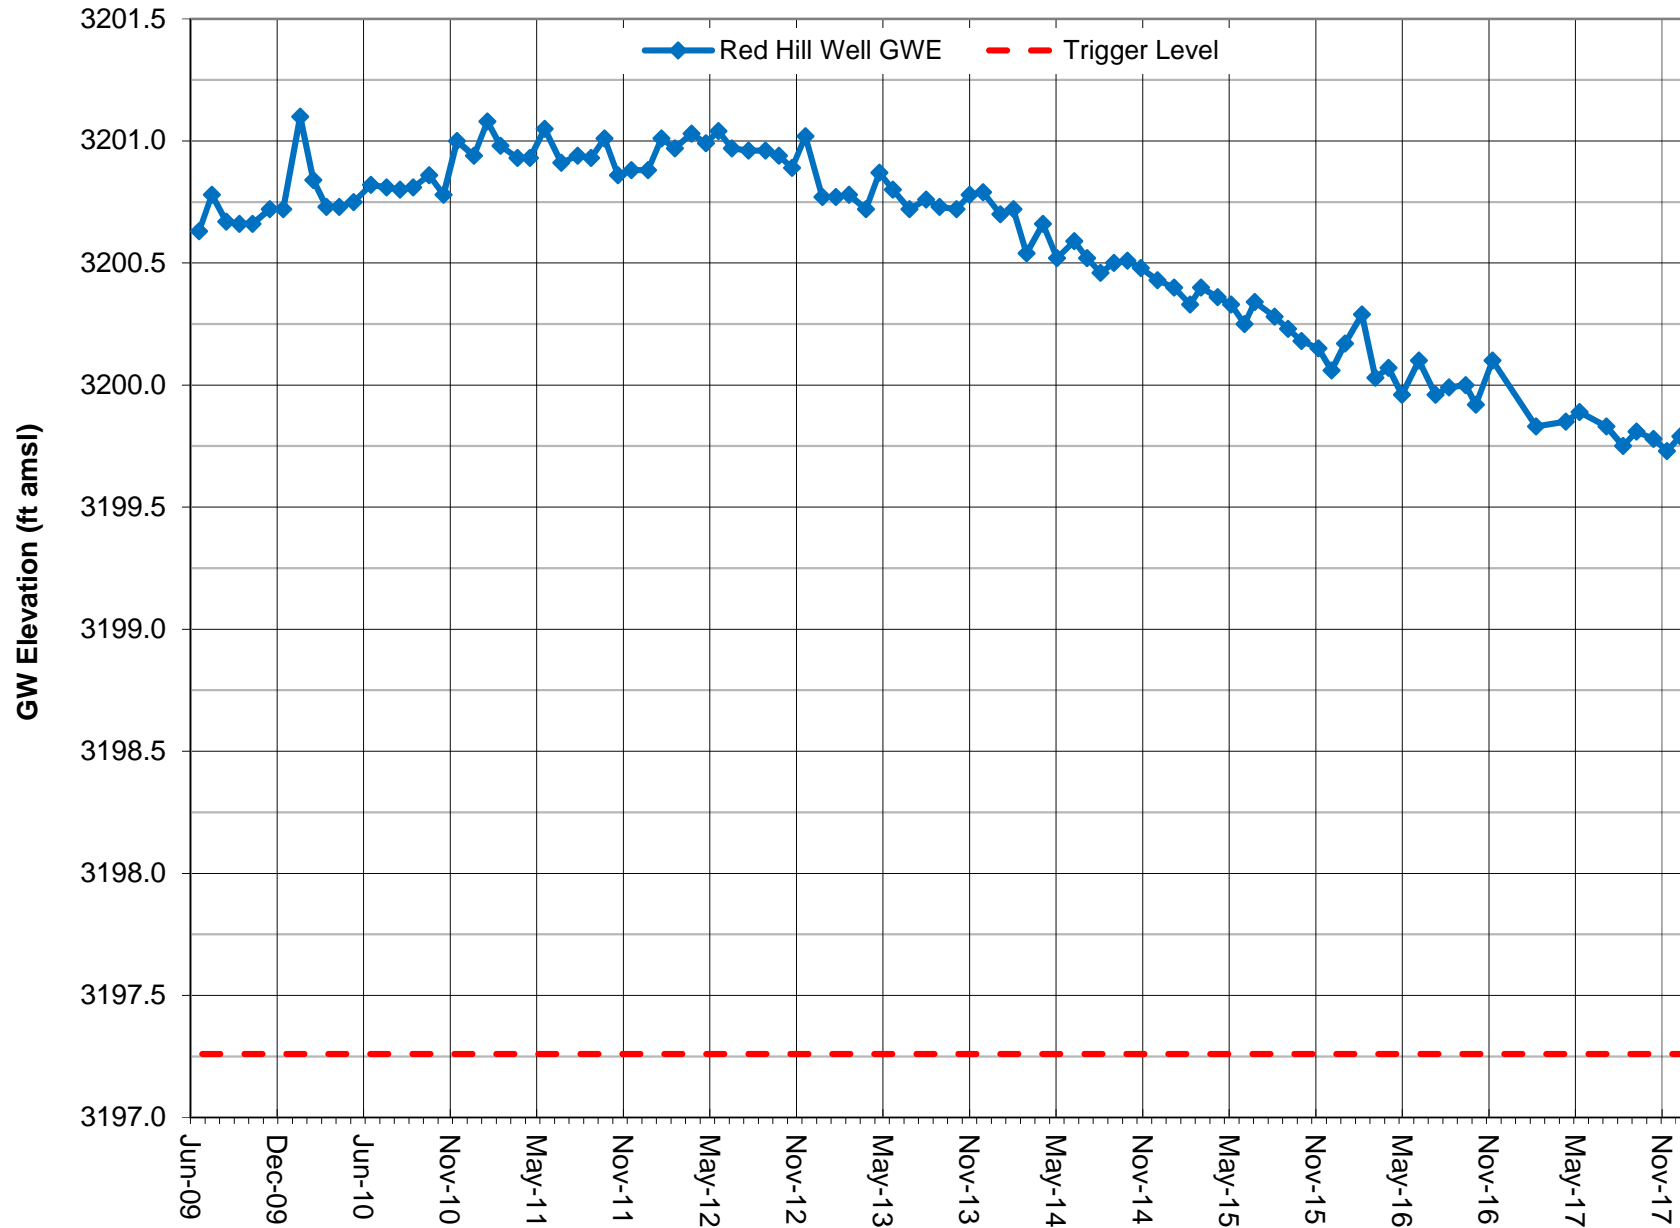


Note: Groundwater elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) RV130 - G-36 Well

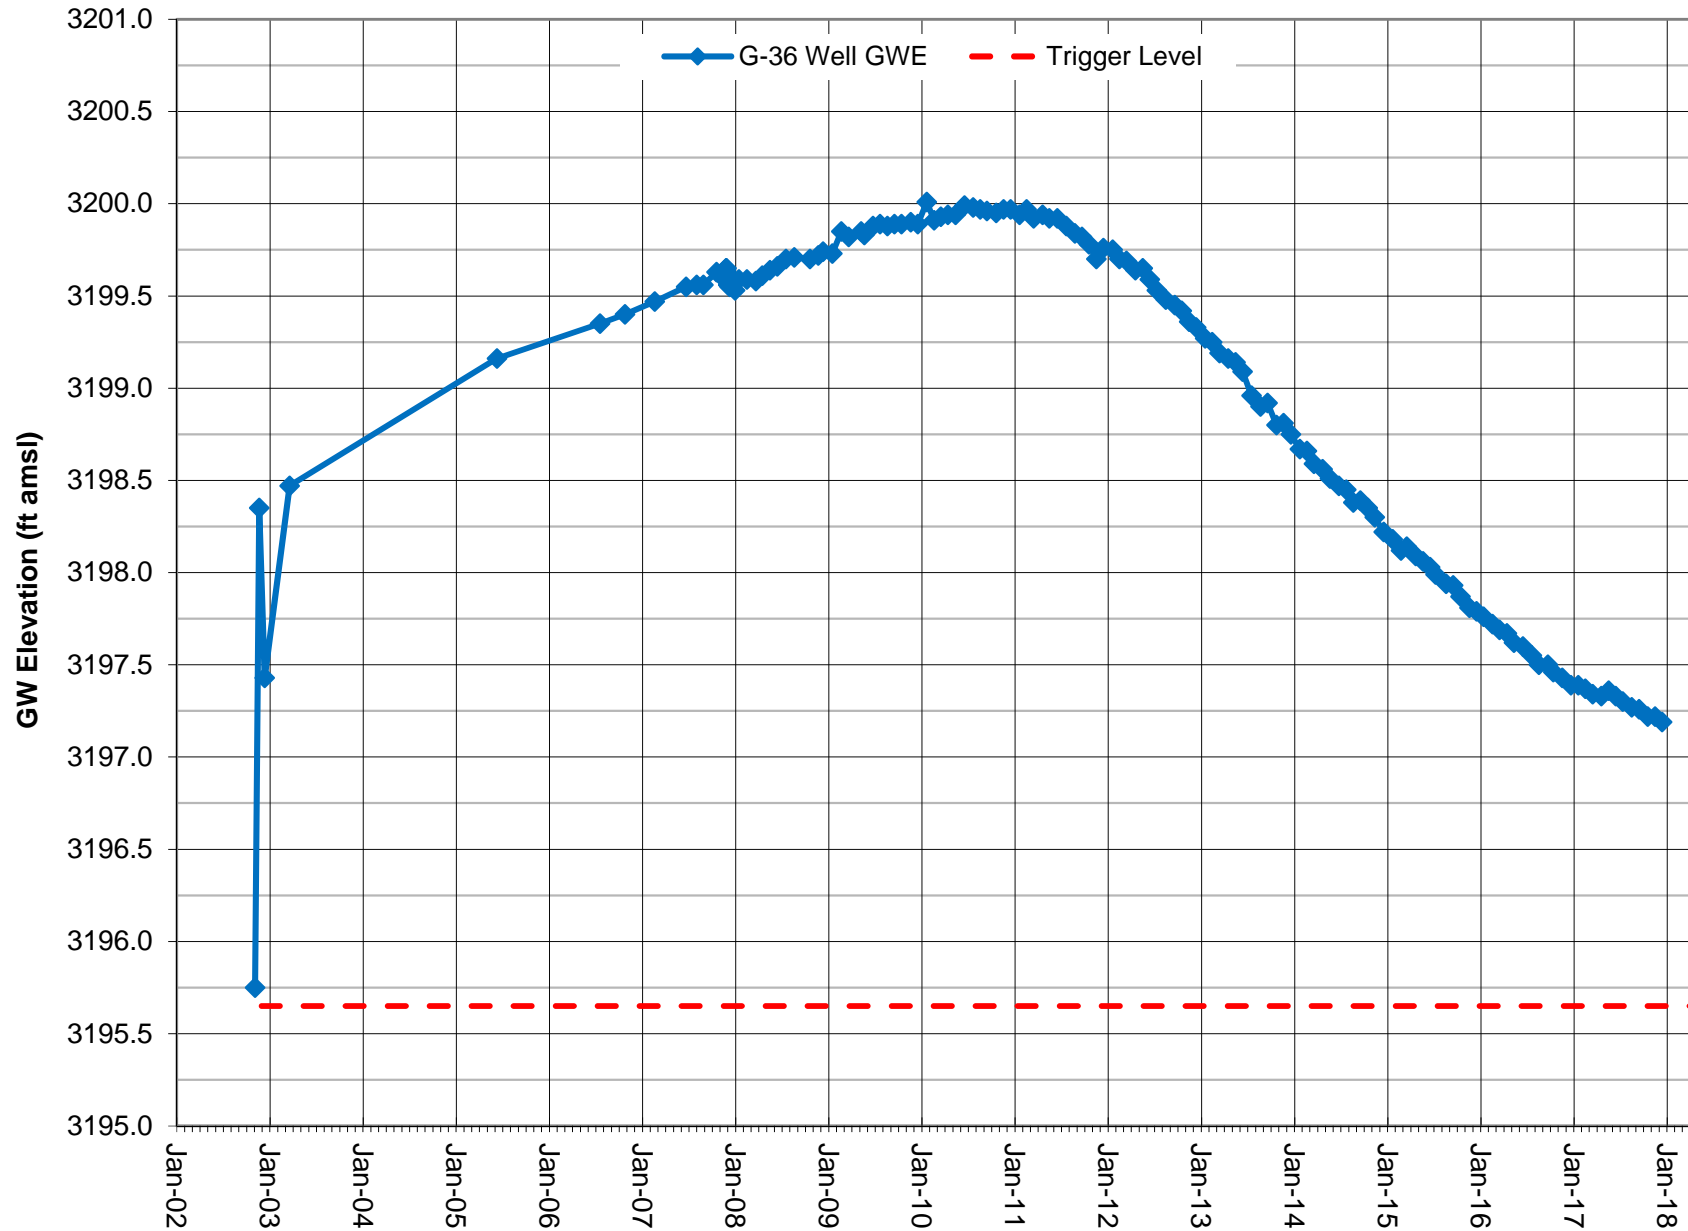


Note: Groundwater elevation data based on manual depth-to-water measurements.
Coso Operating Co. conducted a pump test on the Hay Ranch South Well in fourth quarter 2007.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) RV140 - Lego Well

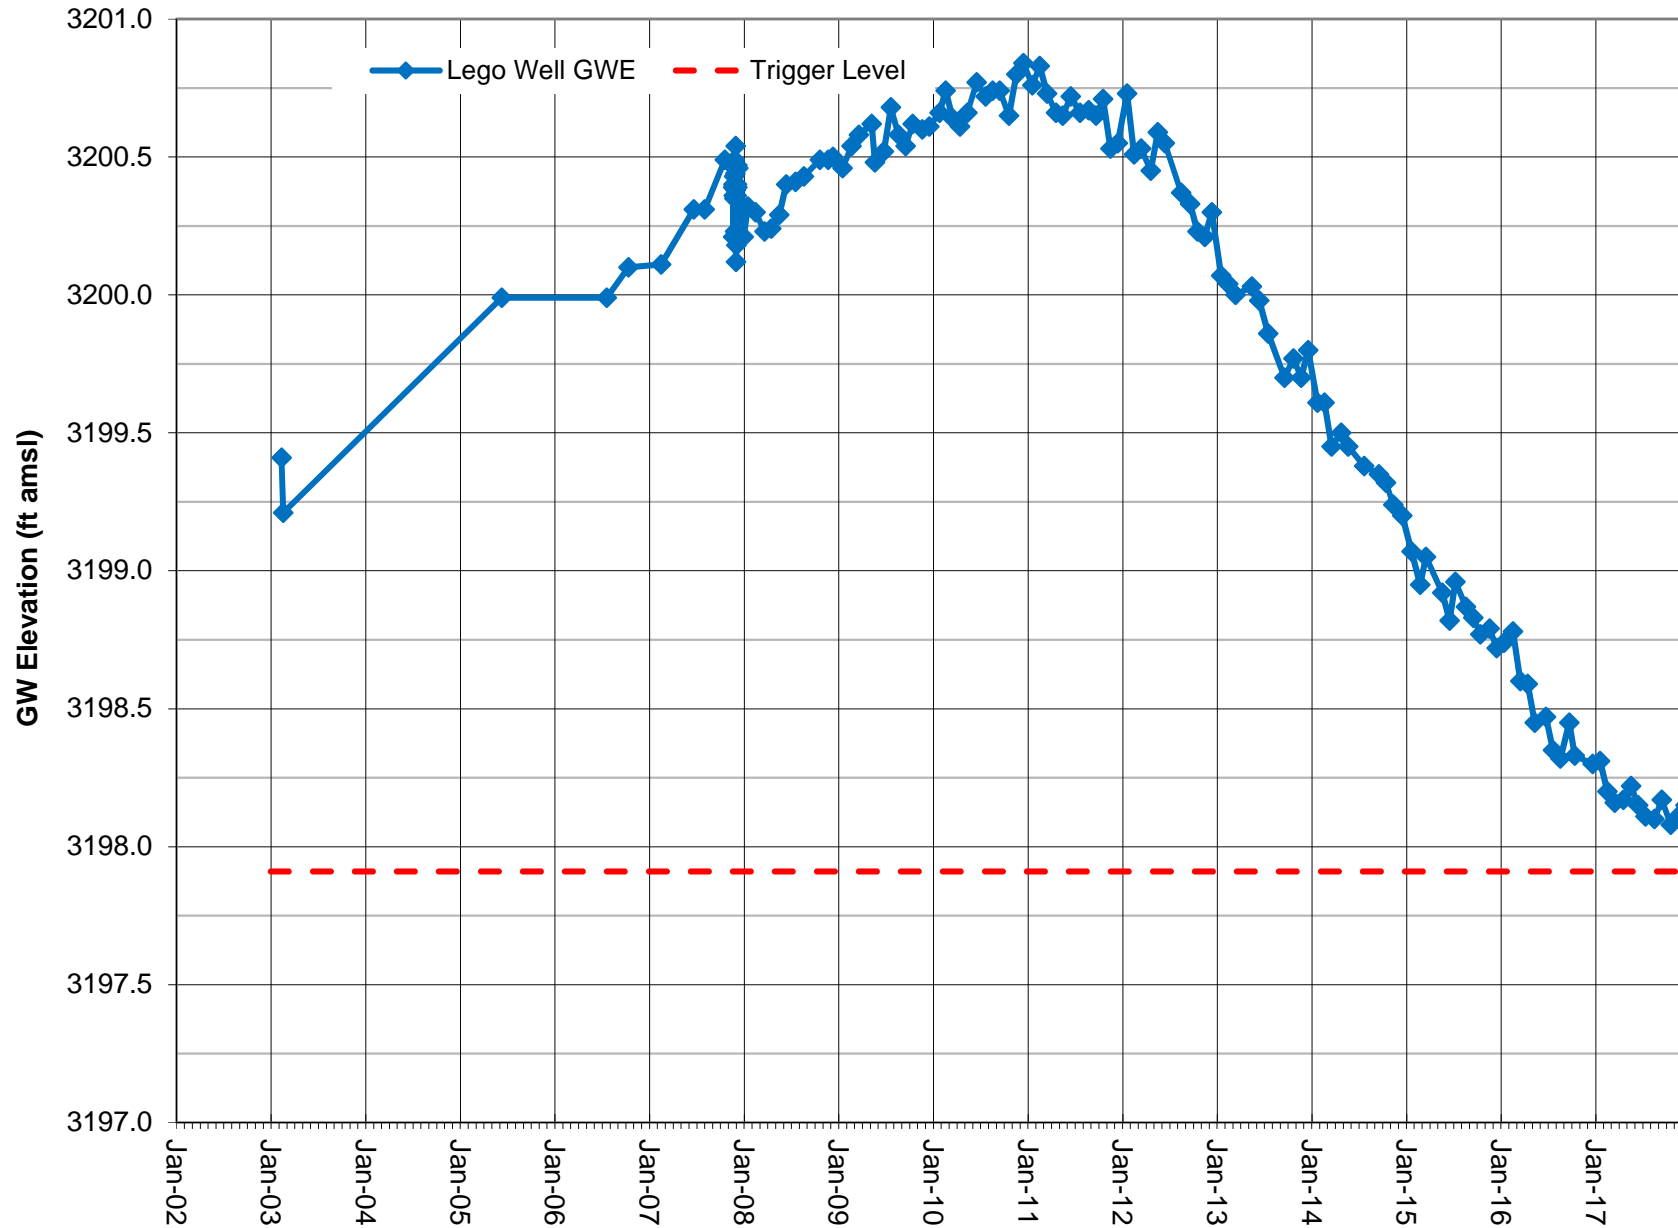


Note: Groundwater elevation data based on manual depth-to-water measurements.
Coso Operating Co. conducted a pump test on the Hay Ranch South Well in fourth quarter 2007.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV150 - Cinder Road Well**

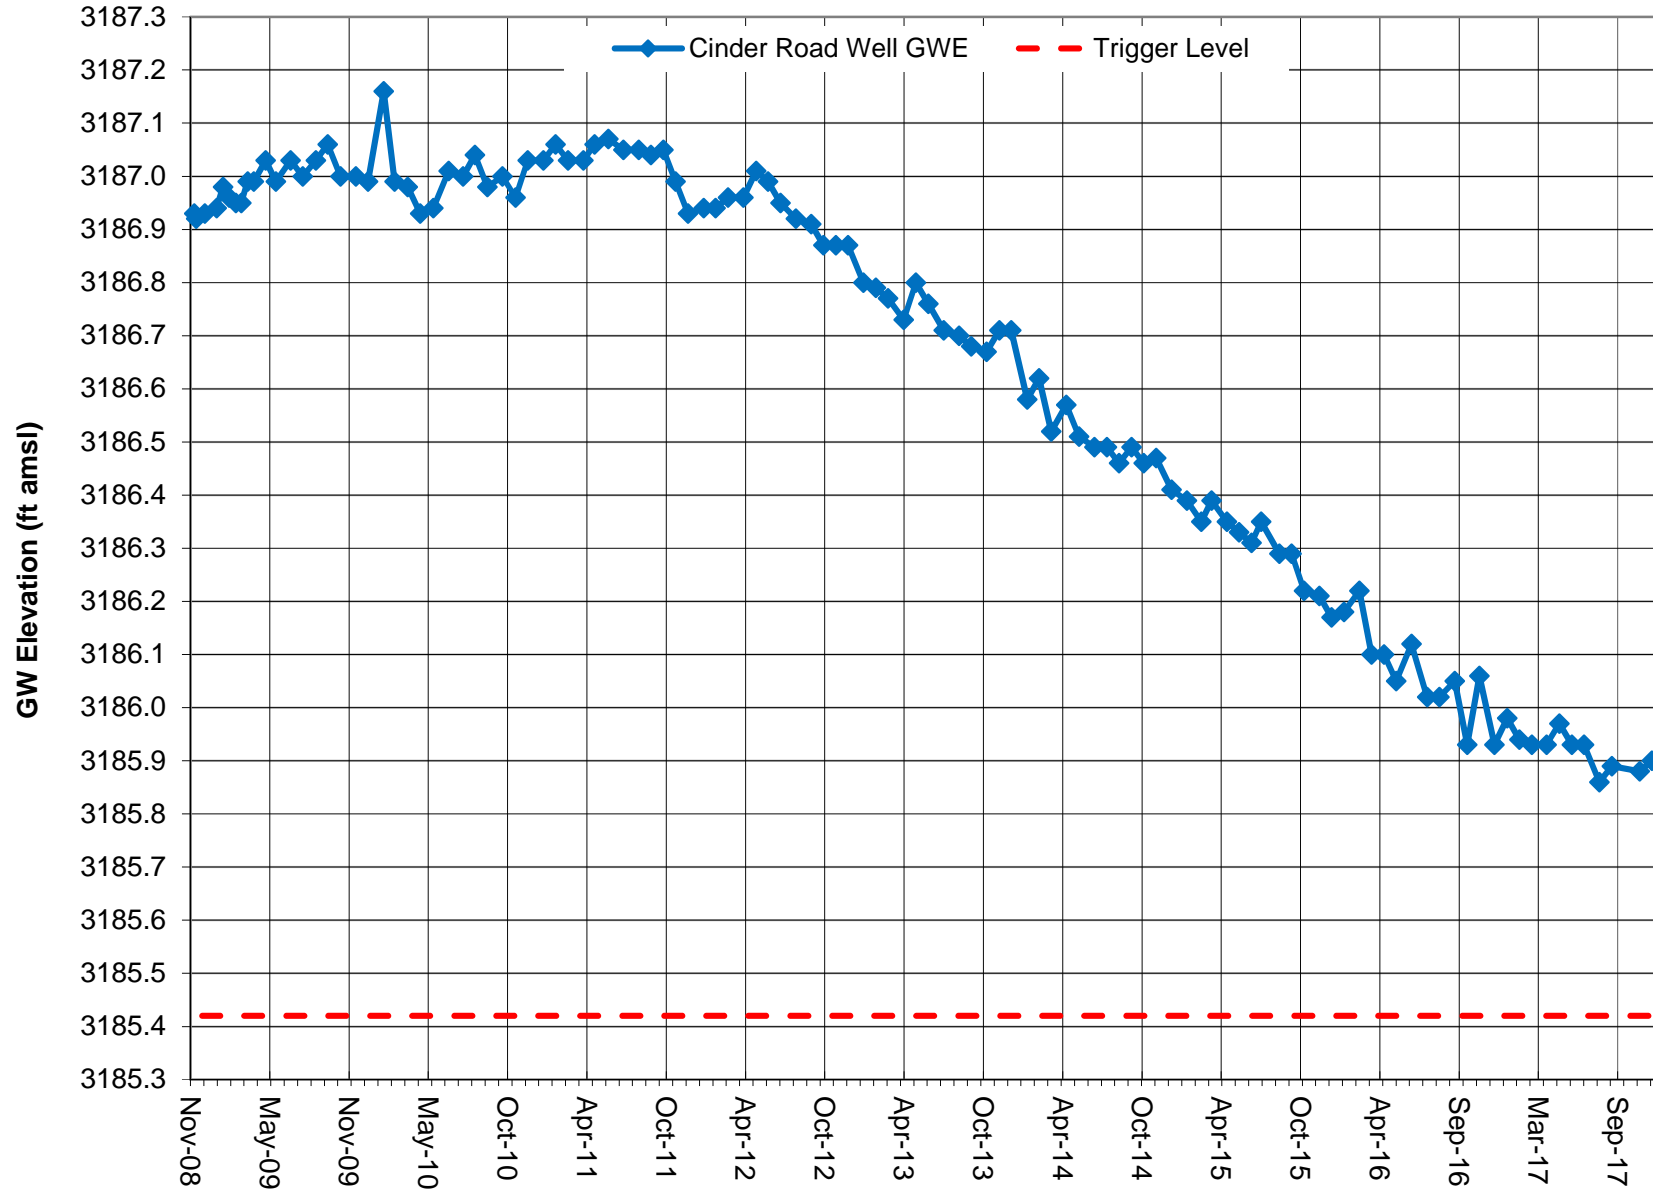


Note: GWE data based on manual depth-to-water measurements.
 COC initiated Hay Ranch Pumping on 12/25/09. Surveyed measuring point altered after October 2017.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV160 - 18-28 GTH Well**

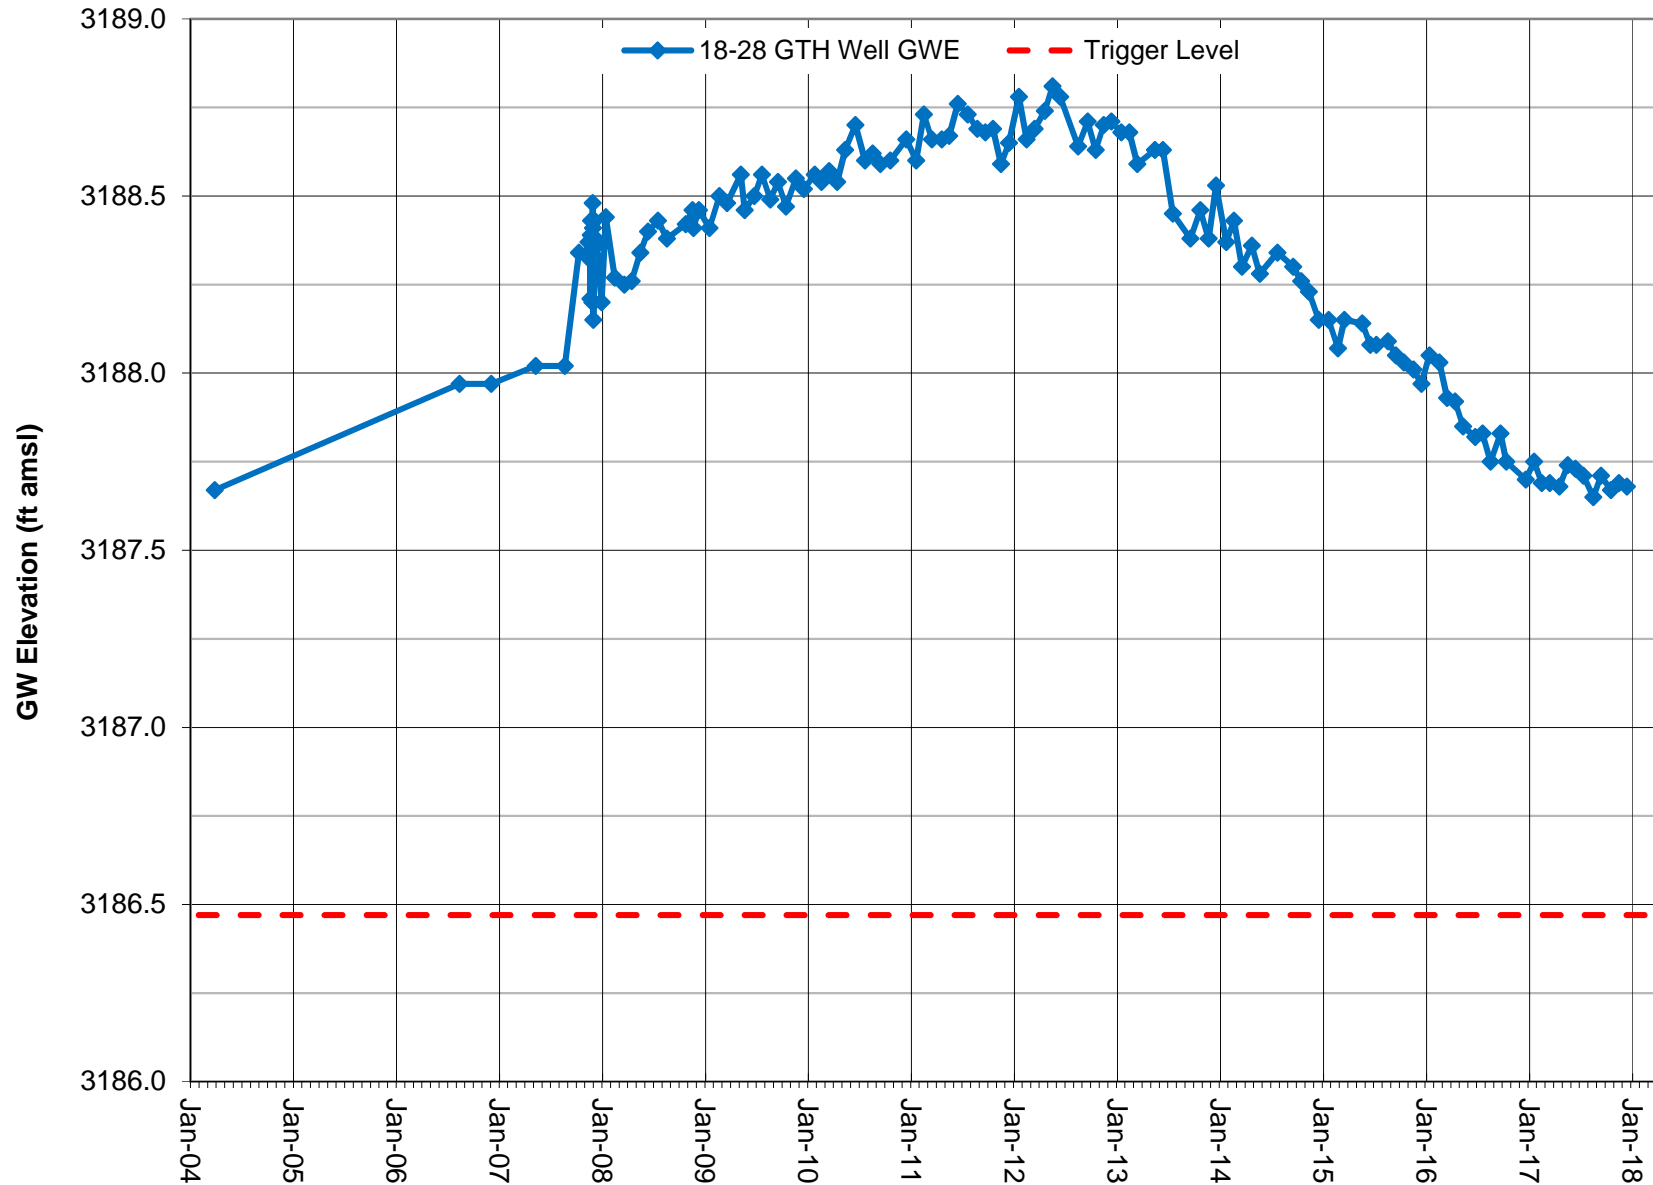


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Coso Operating Co. conducted a pump test on the Hay Ranch South Well in fourth quarter 2007.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) RV170 - Fossil Falls Well

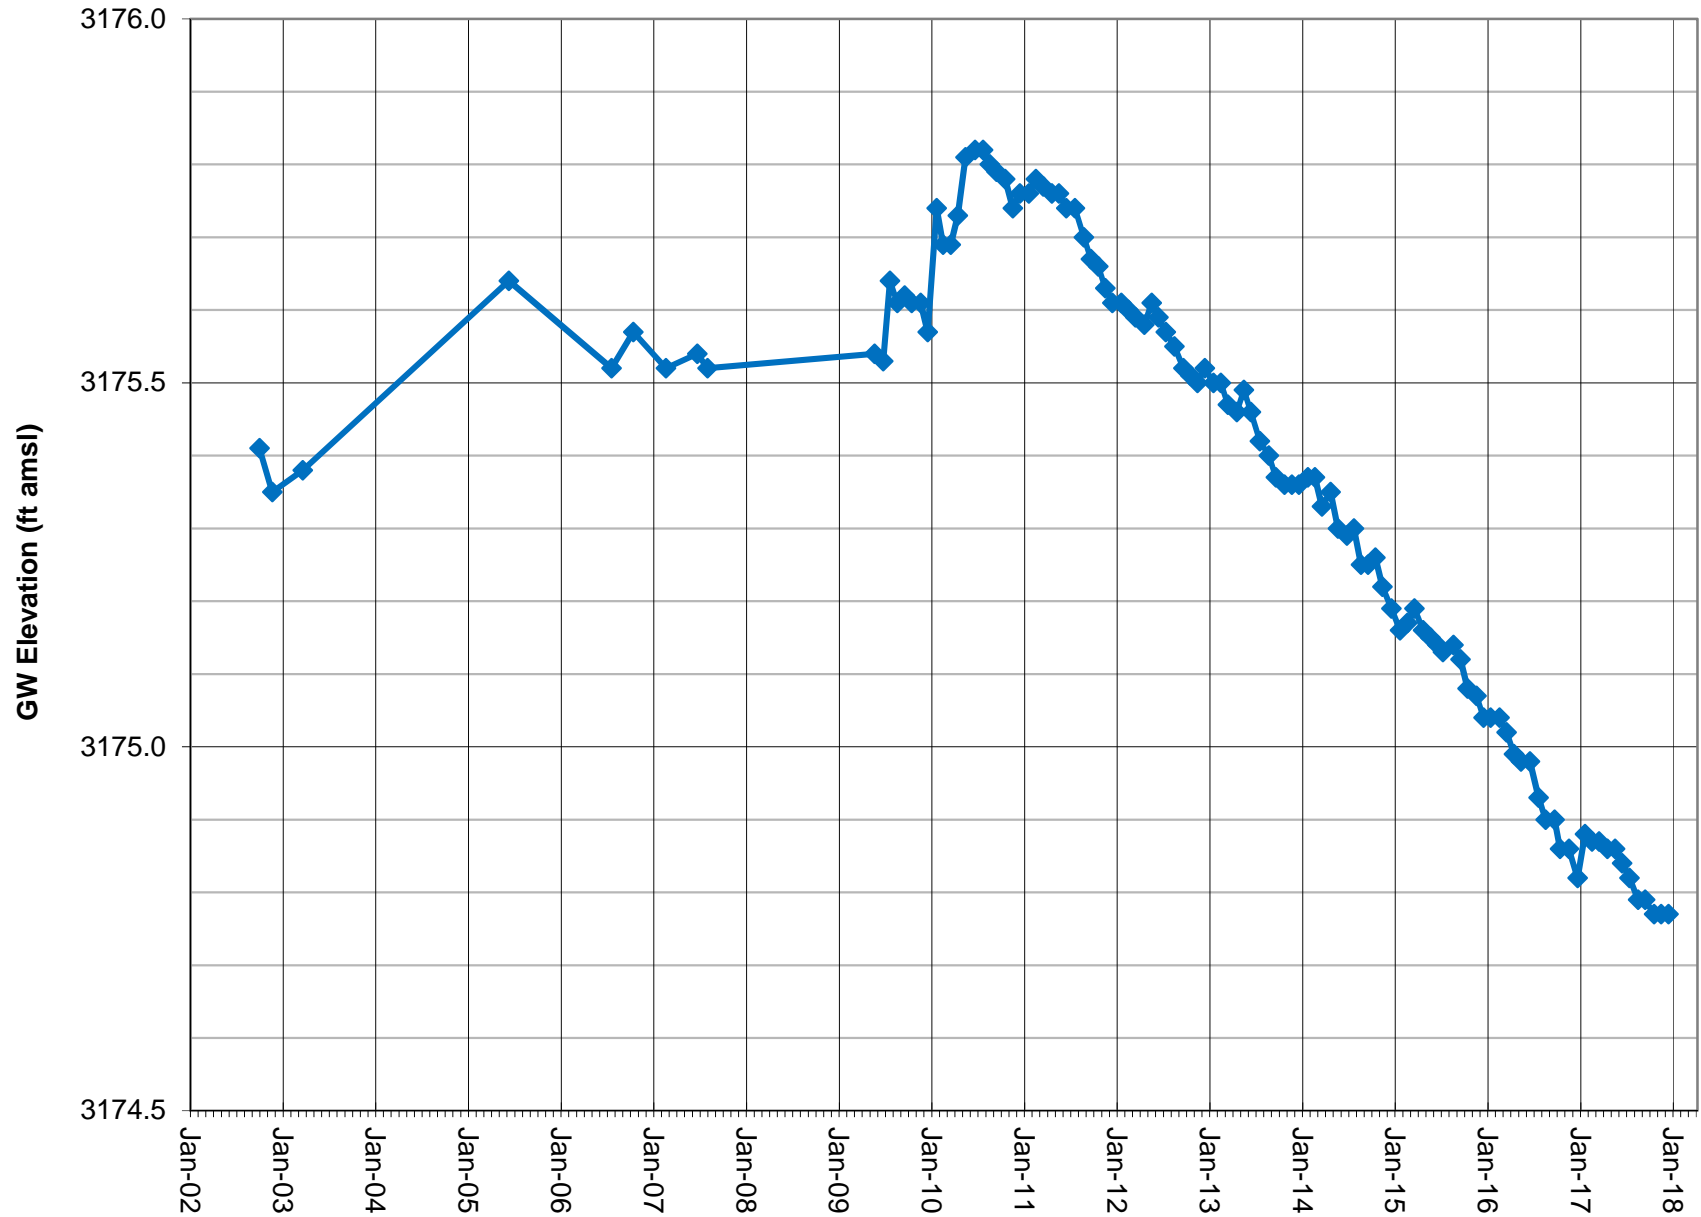


Note: Groundwater elevation data based on manual depth-to-water measurements.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV180 - Little Lake Ranch North Well**

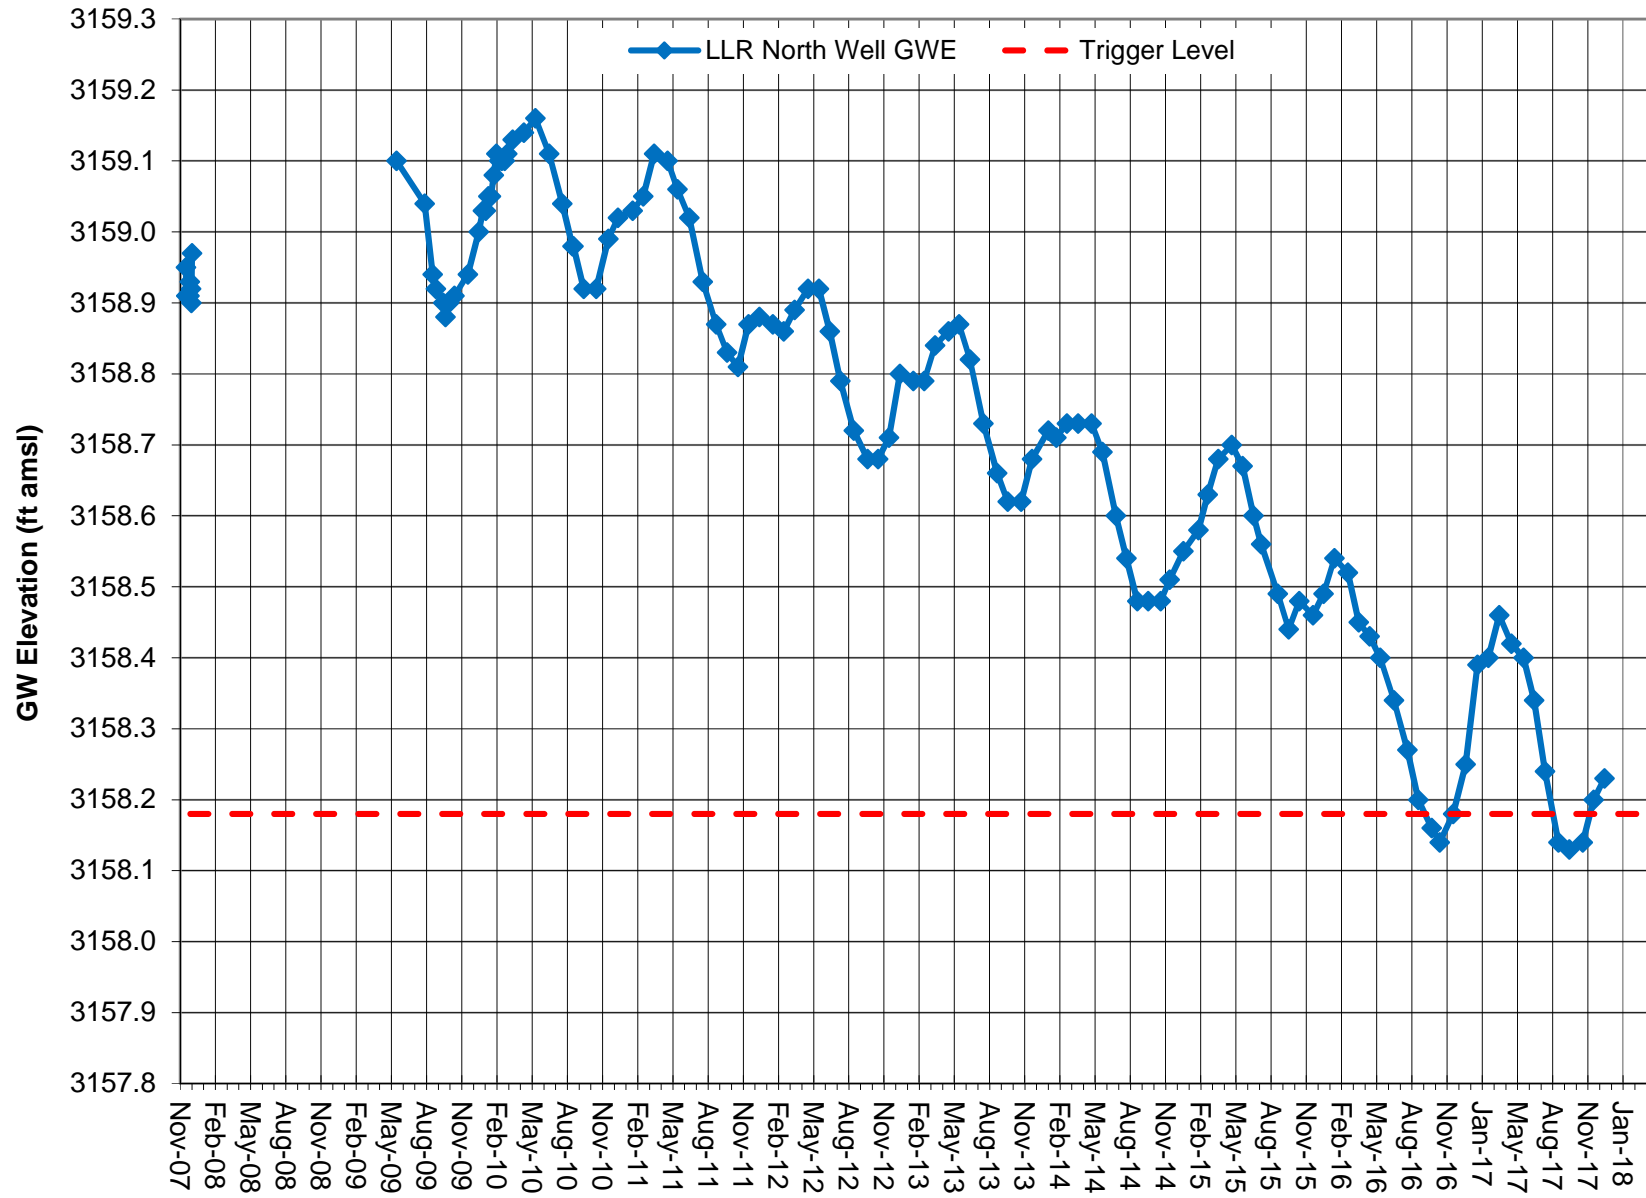


Note: Groundwater elevation data based on manual depth-to-water measurements.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV210 - Little Lake Ranch Dock Well**

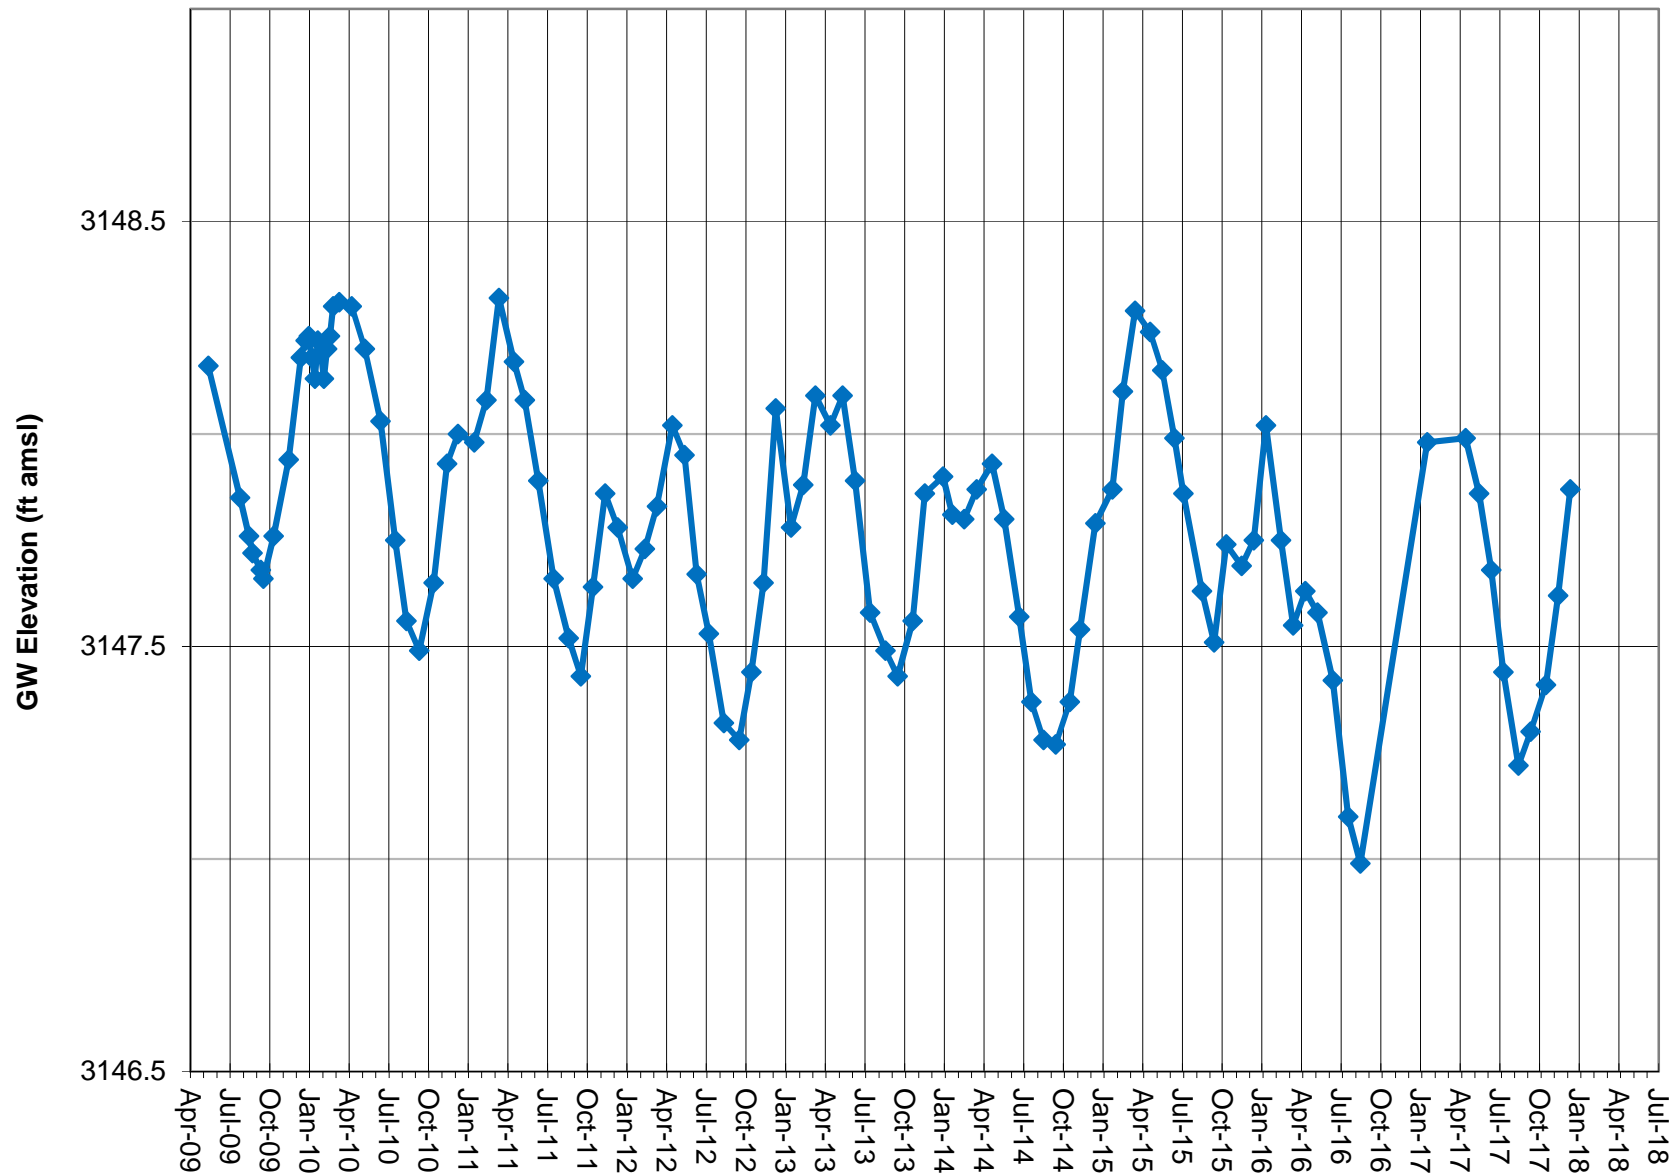


Note: GWE data based on manual depth-to-water measurements. Lines between data points are approximations.
 COC initiated Hay Ranch Project pumping on 12/25/09. Surveyed measuring point altered after Jan. 2017.

SURFACE WATER ELEVATION DATA - Long-Term (Manual) **RV220 - LLR Stilling Well (lake surface)**

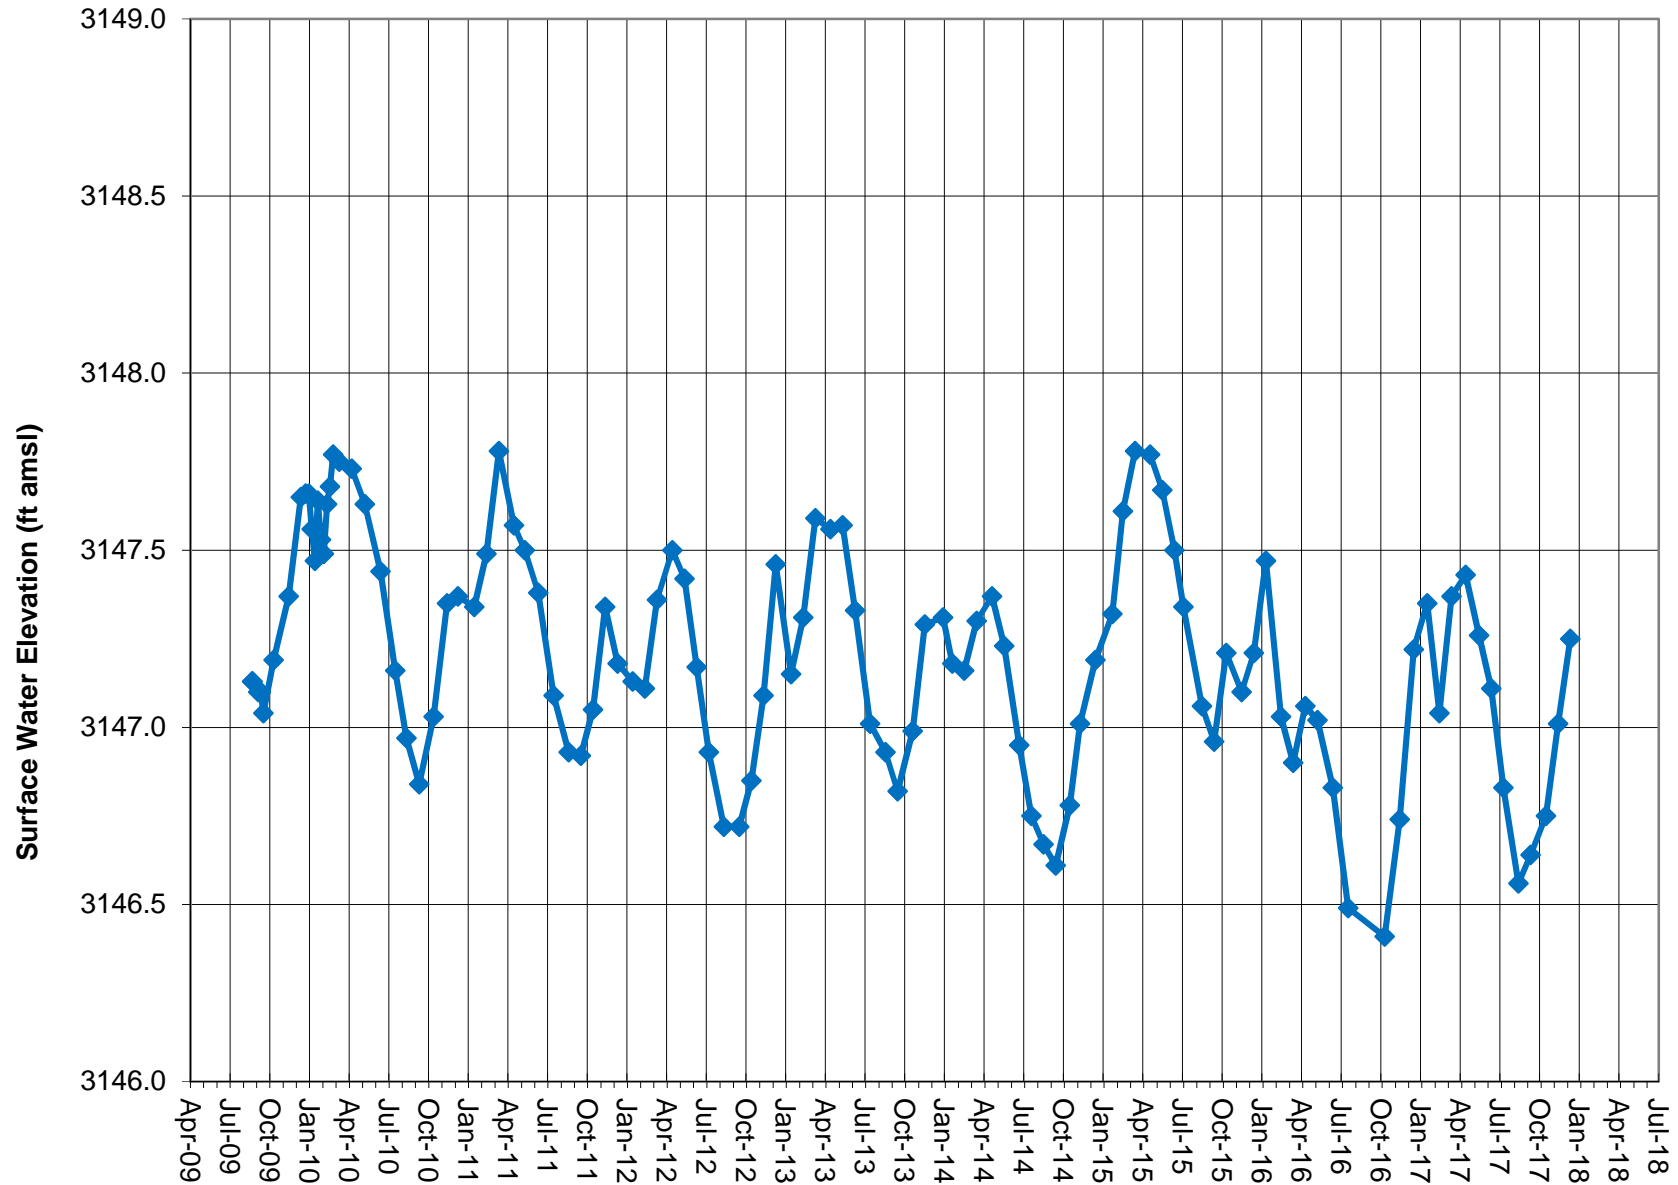

Note: Surface water elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 August and September 2016 measurements not graphed due to low lake levels.


GROUNDWATER ELEVATION DATA - Long-Term (Manual) **RV260 - Little Lake Ranch Hotel Well**

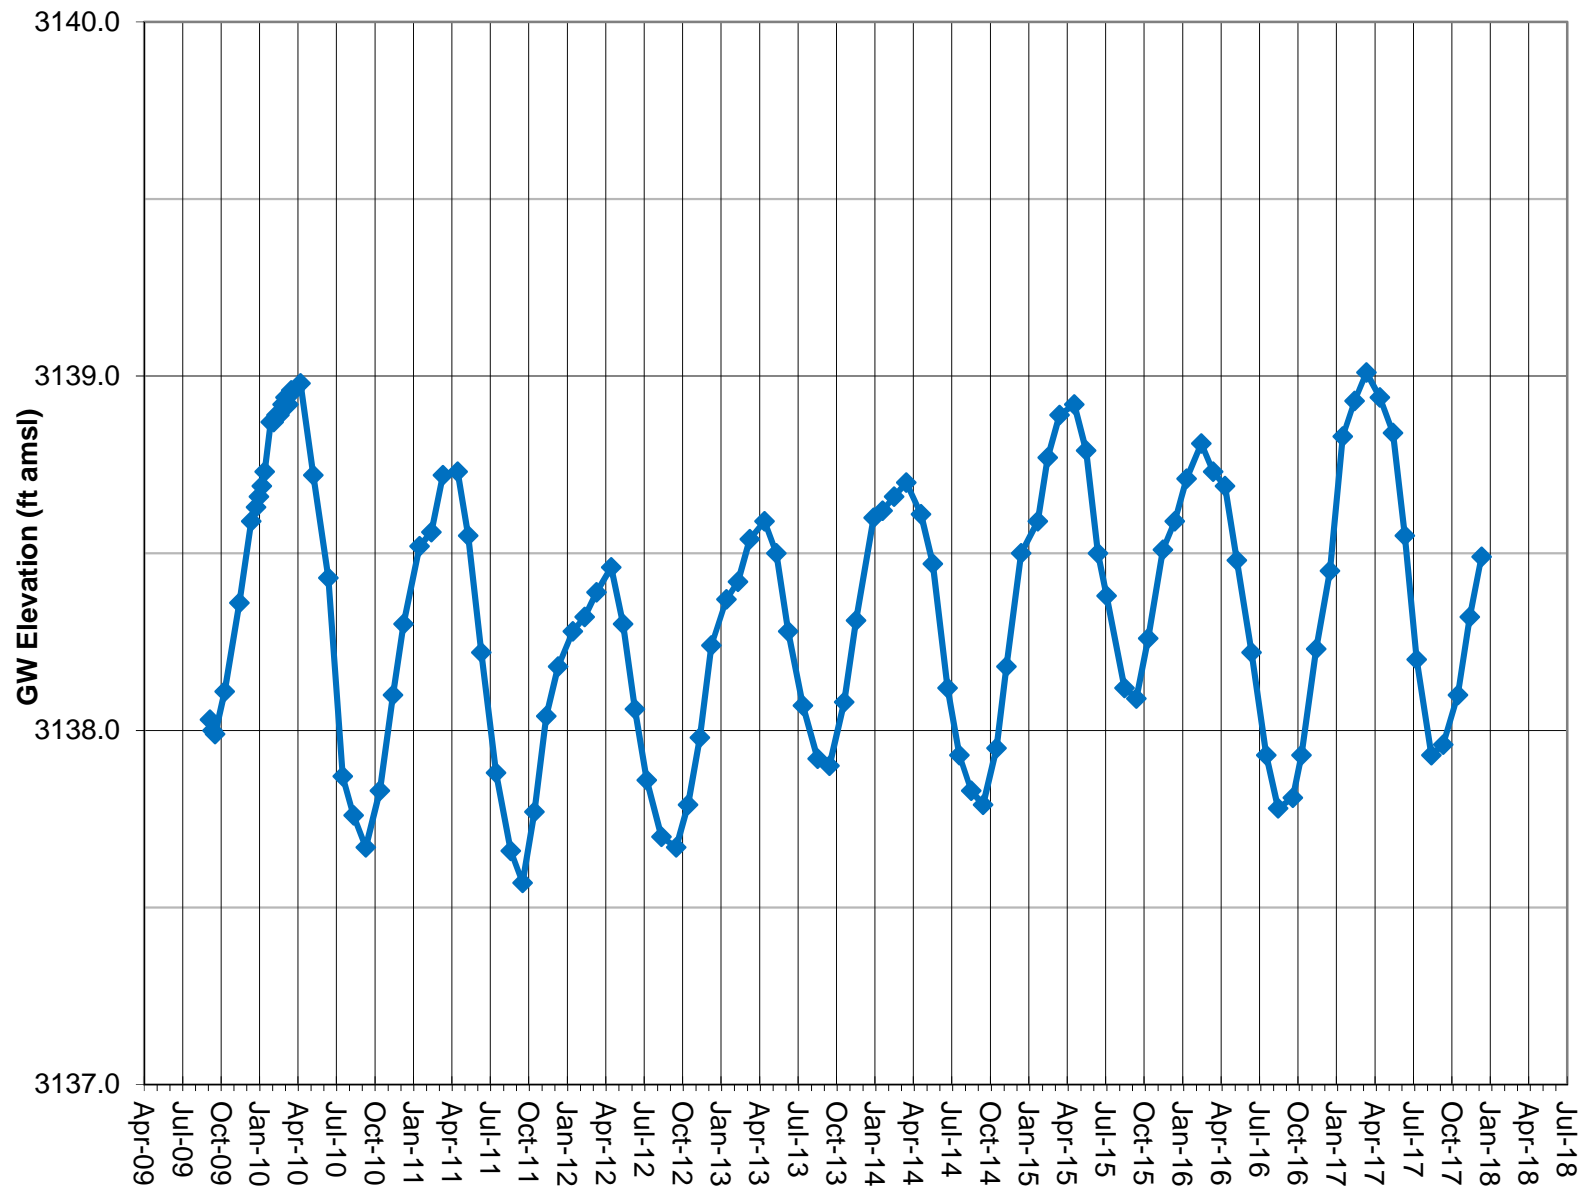

Note: Groundwater elevation data based on manual depth-to-water measurements. Lines between data points are approximations.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.


**GROUNDWATER ELEVATION DATA
TRANSDUCER**

GROUNDWATER ELEVATION DATA - Transducer RV030 - Cal Pumice Well

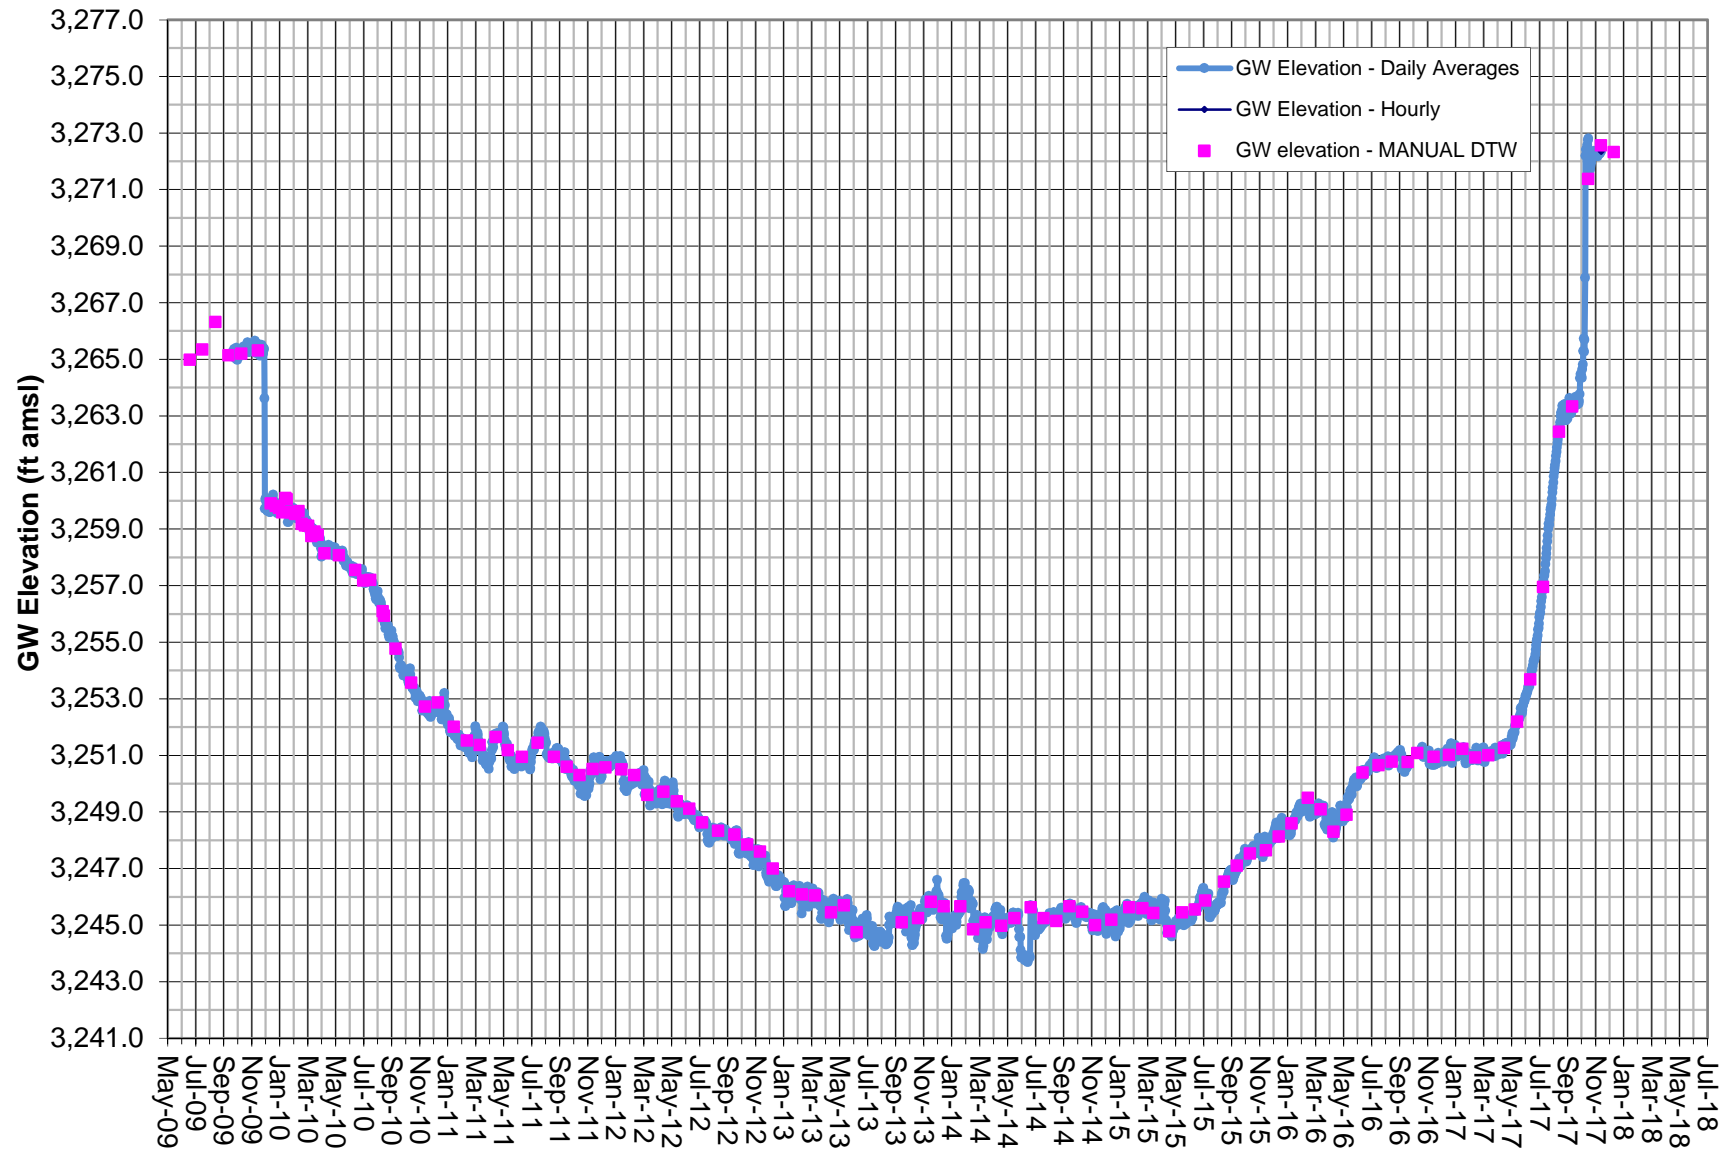


Note: Transducer data adjusted by BaroTroll and correlated to Manual DTW.
 Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.
 Transducer removed Dec. 2017, as approved by ICWD.

GROUNDWATER ELEVATION DATA - Transducer RV060 - HR 1A Well

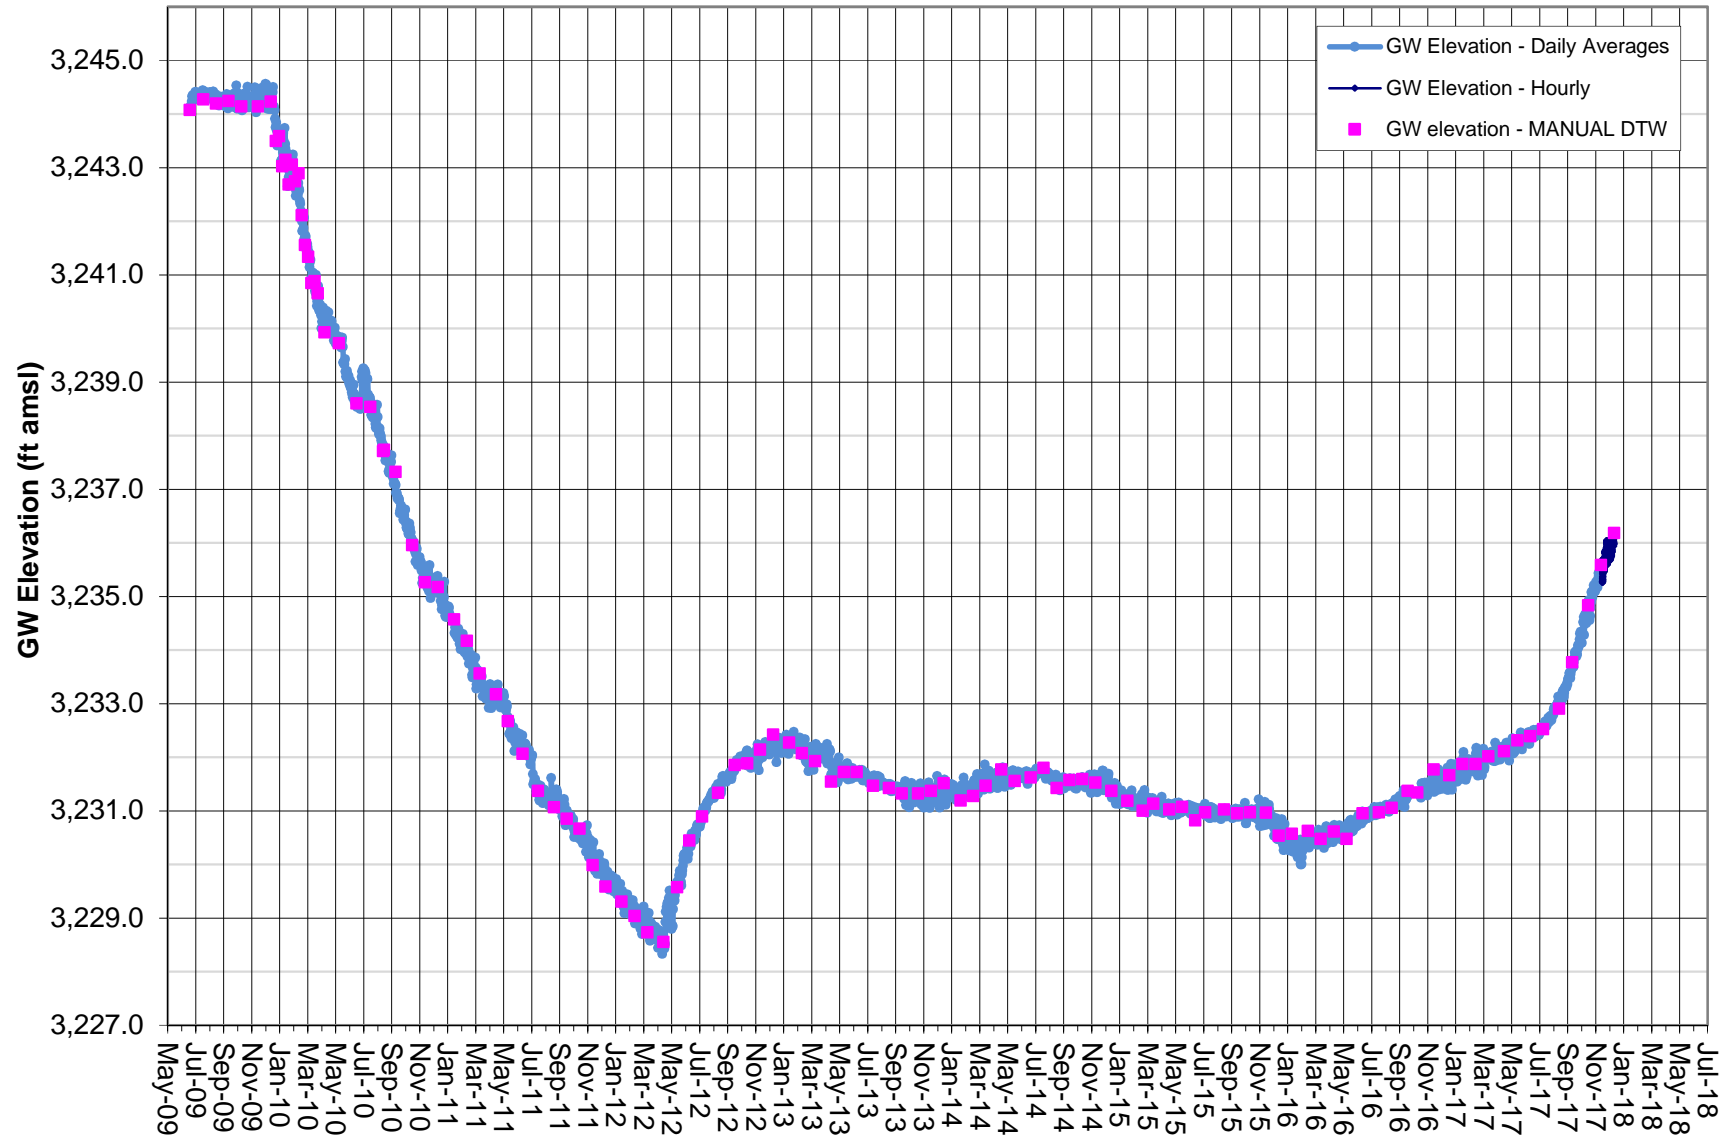


Note: Screened interval 170-260 feet.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.
HR 1A data gaps due to transducer malfunction.

GROUNDWATER ELEVATION DATA - Transducer RV061 - HR 1B Well

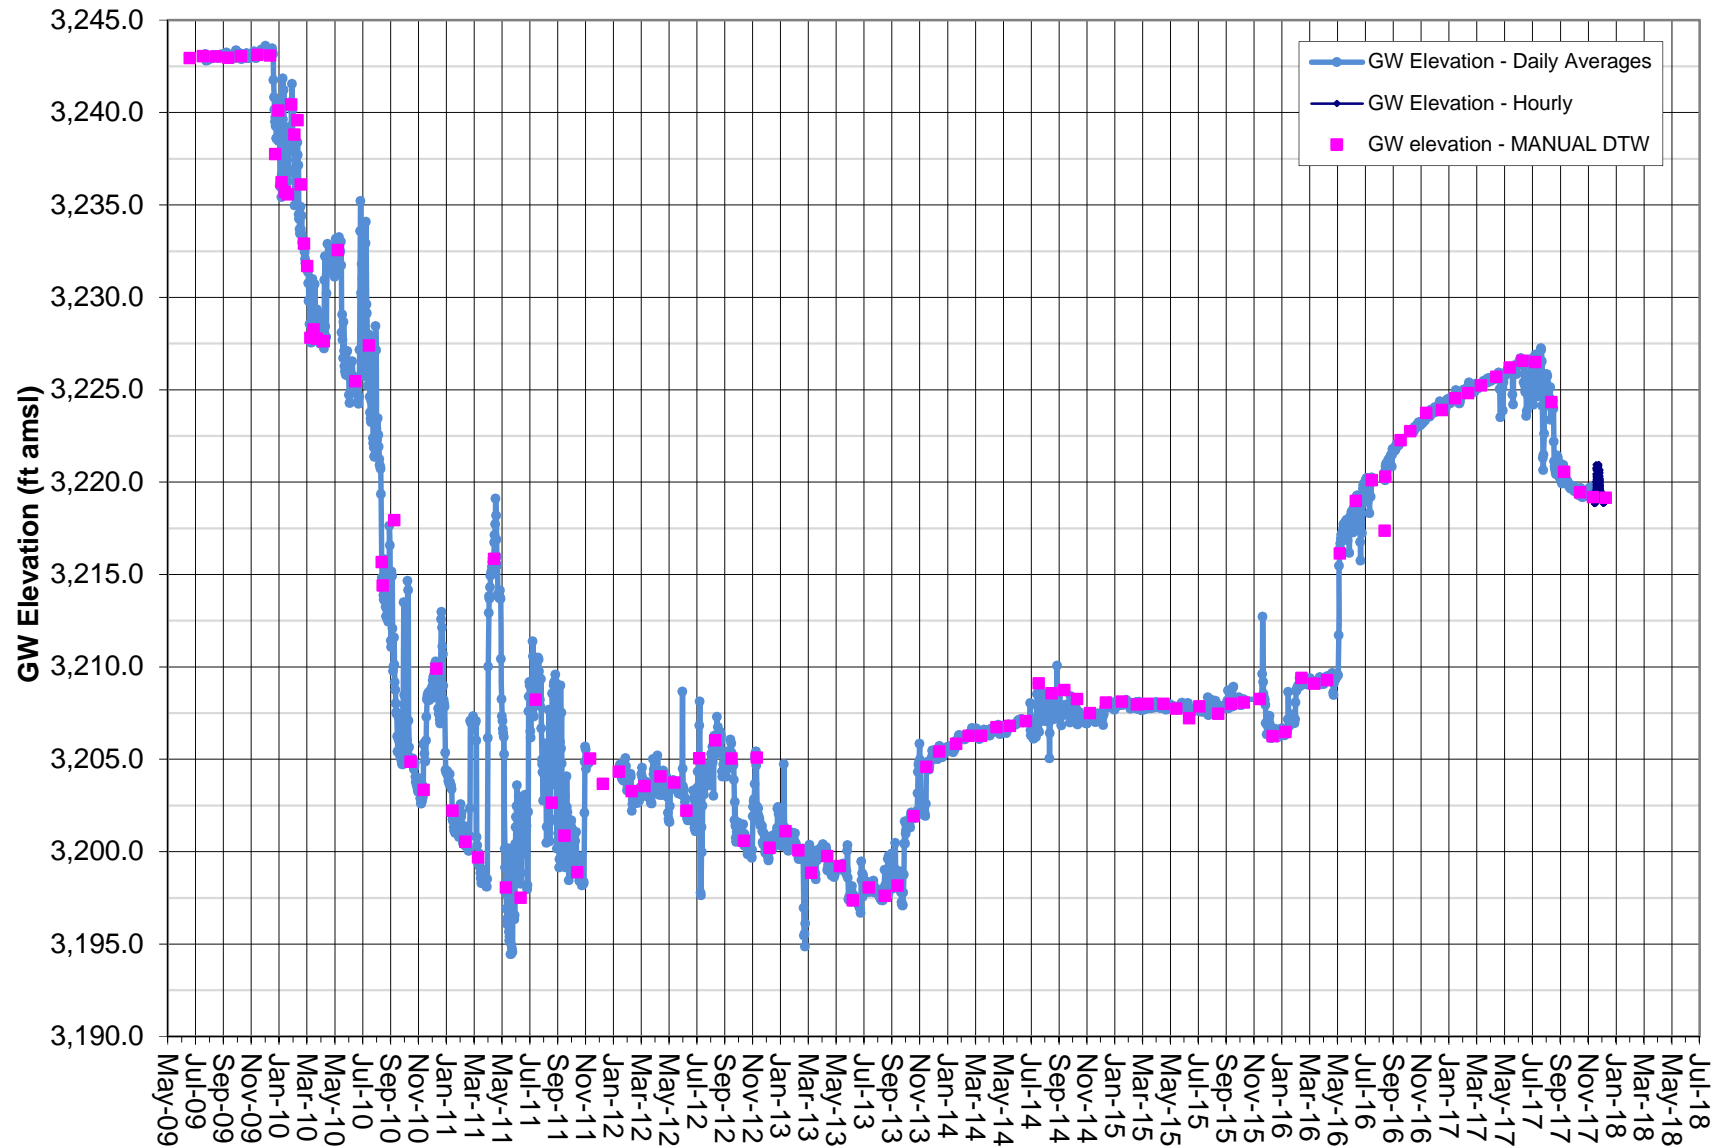


Note: Transducer data (absolute pressure) adjusted by data logged from BaroTroll and correlated to Manual DTW measurements.
Screened interval 490-540 feet.

GROUNDWATER ELEVATION DATA - Transducer RV062 - HR 1C Well

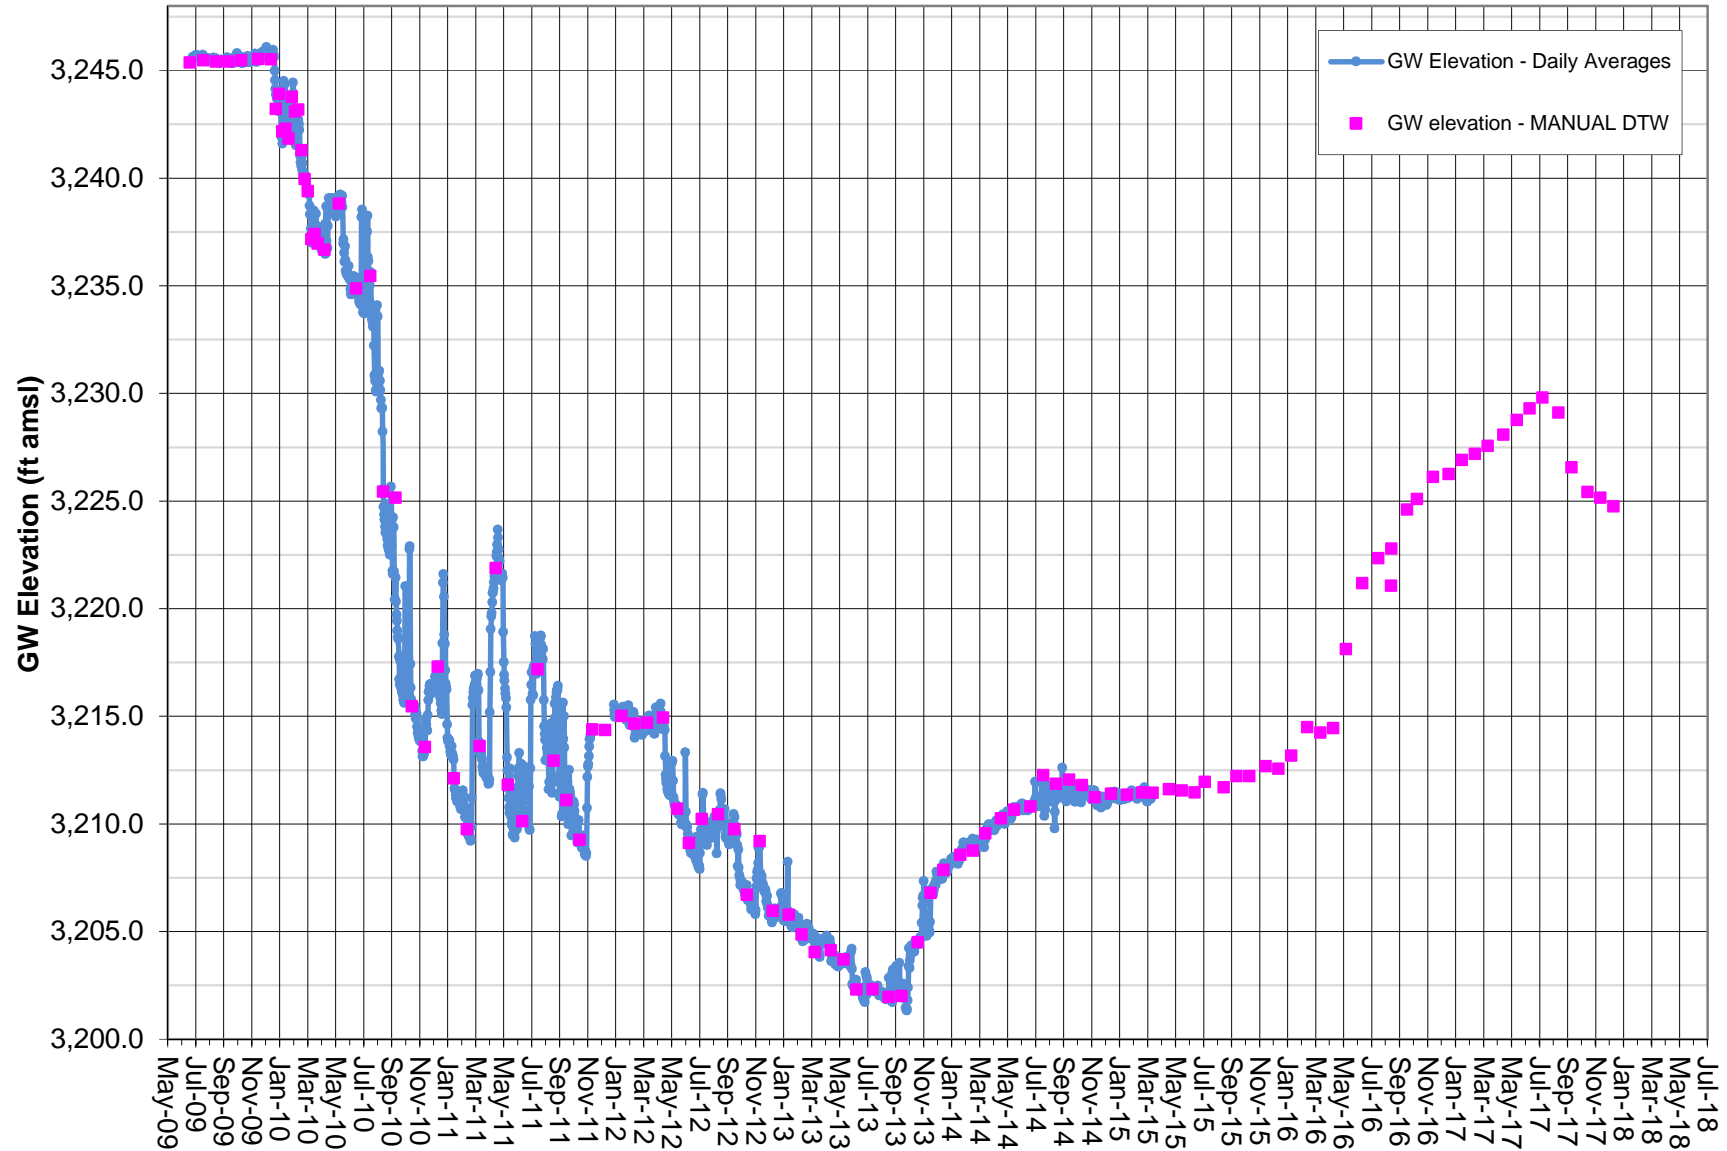

Note: Screened interval 340-405 feet.
HR 1C transducer removed in 2015, as approved by ICWD.


GROUNDWATER ELEVATION DATA - Transducer RV080 - HR 2A Well

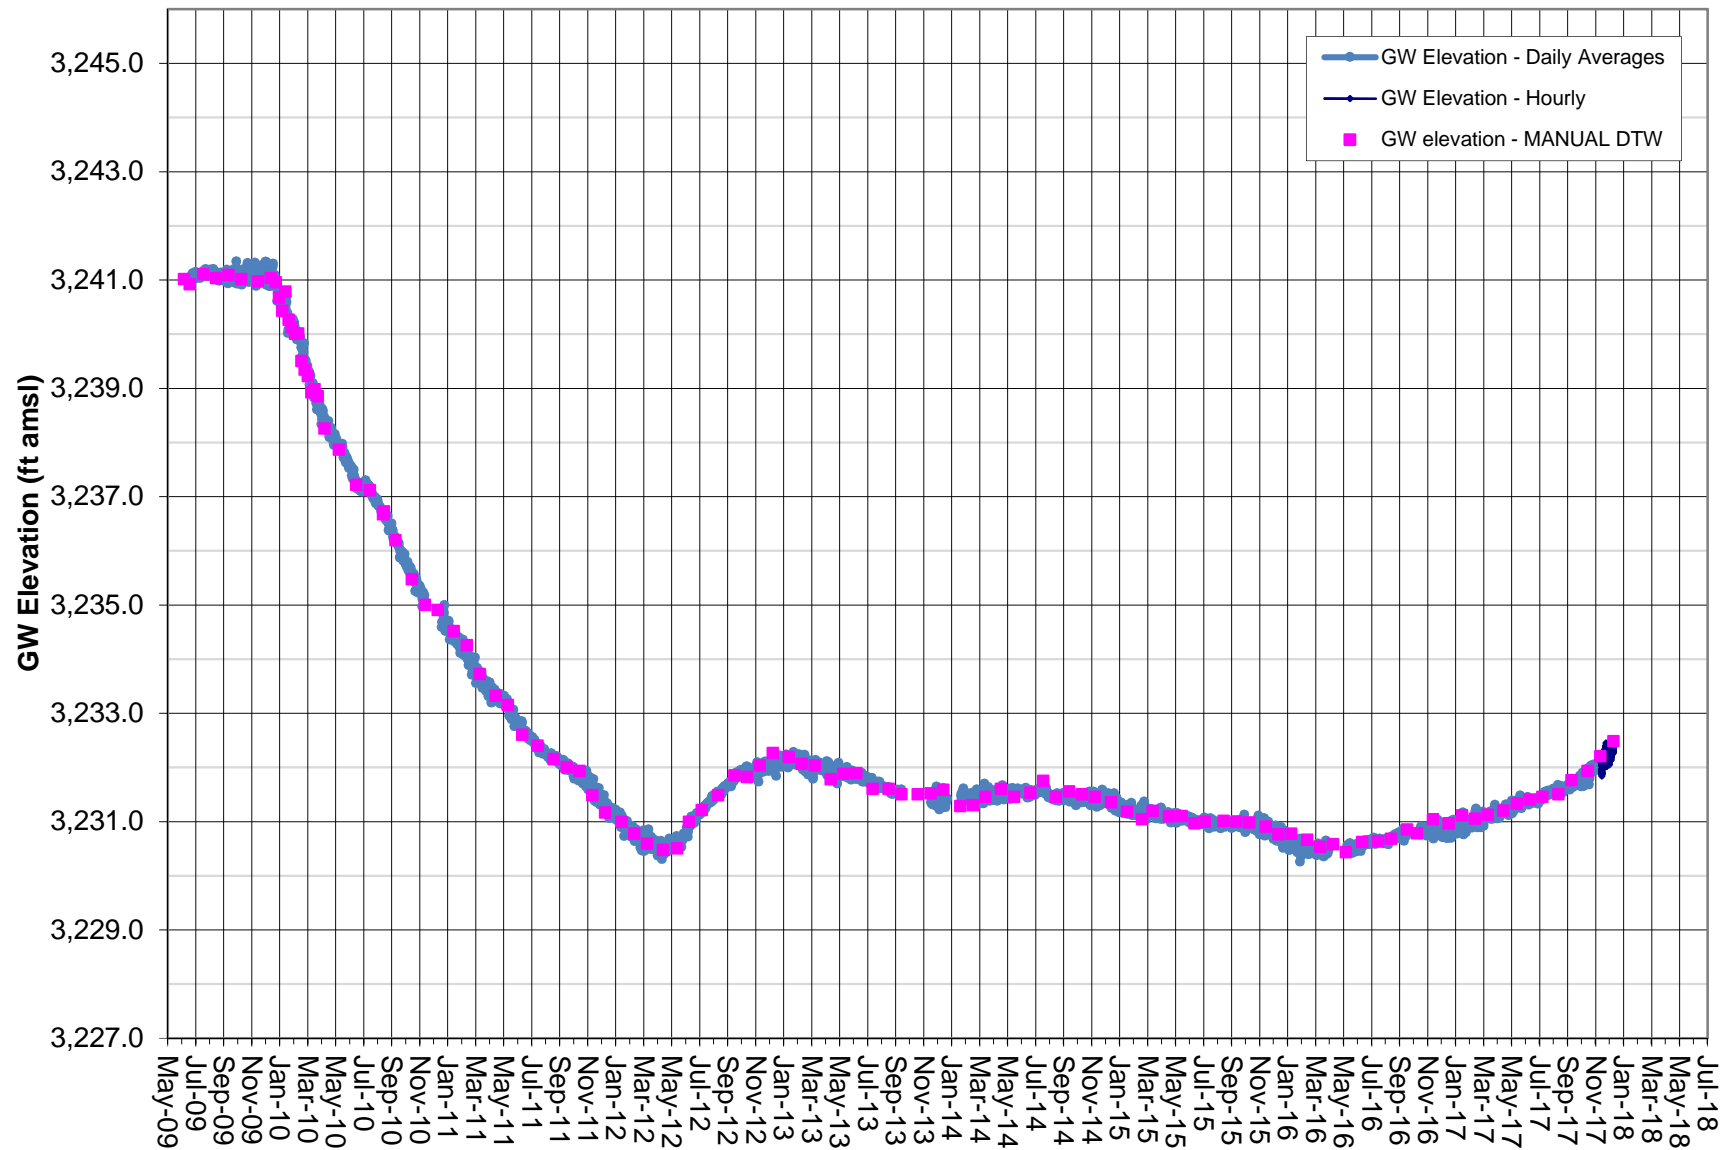

Note: Screened interval 180-300 feet.

Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.


GROUNDWATER ELEVATION DATA - Transducer RV081 - HR 2B Well

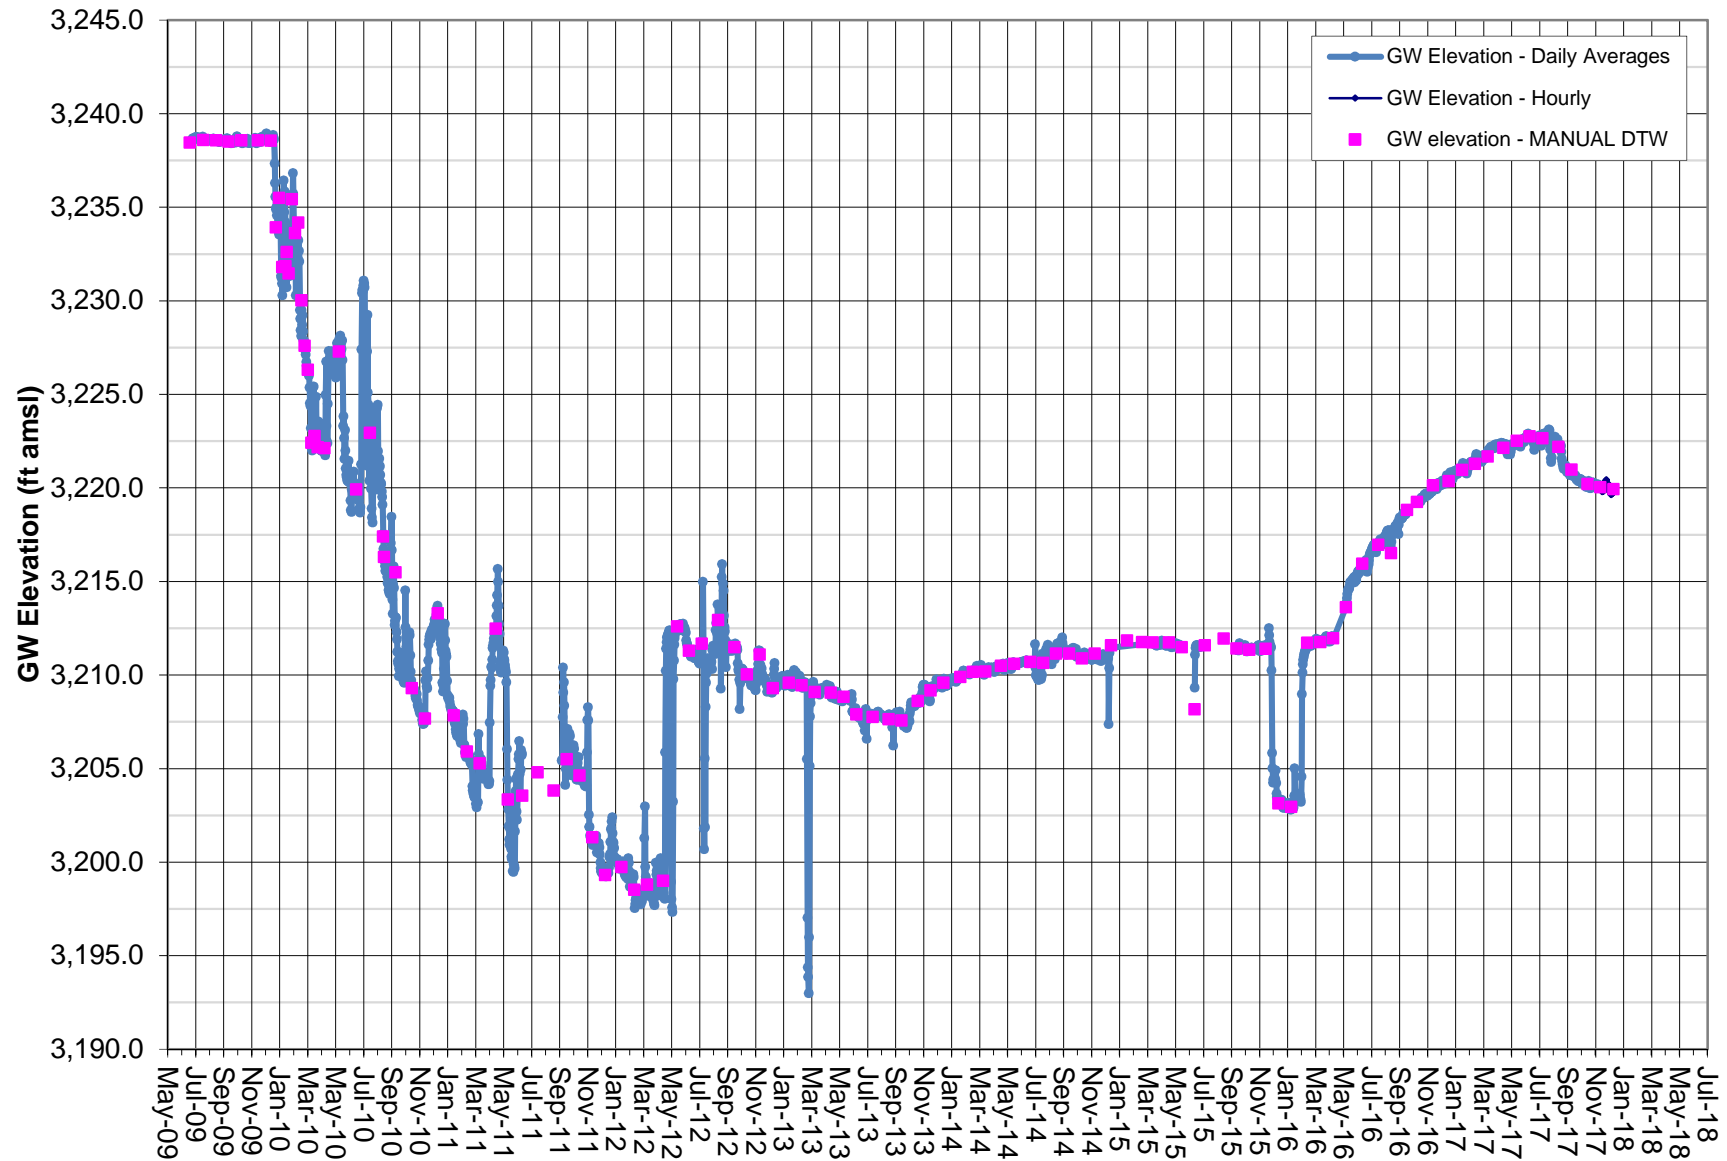

Note: Screened interval 519-584 feet.


Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Transducer RV082 - HR 2C Well

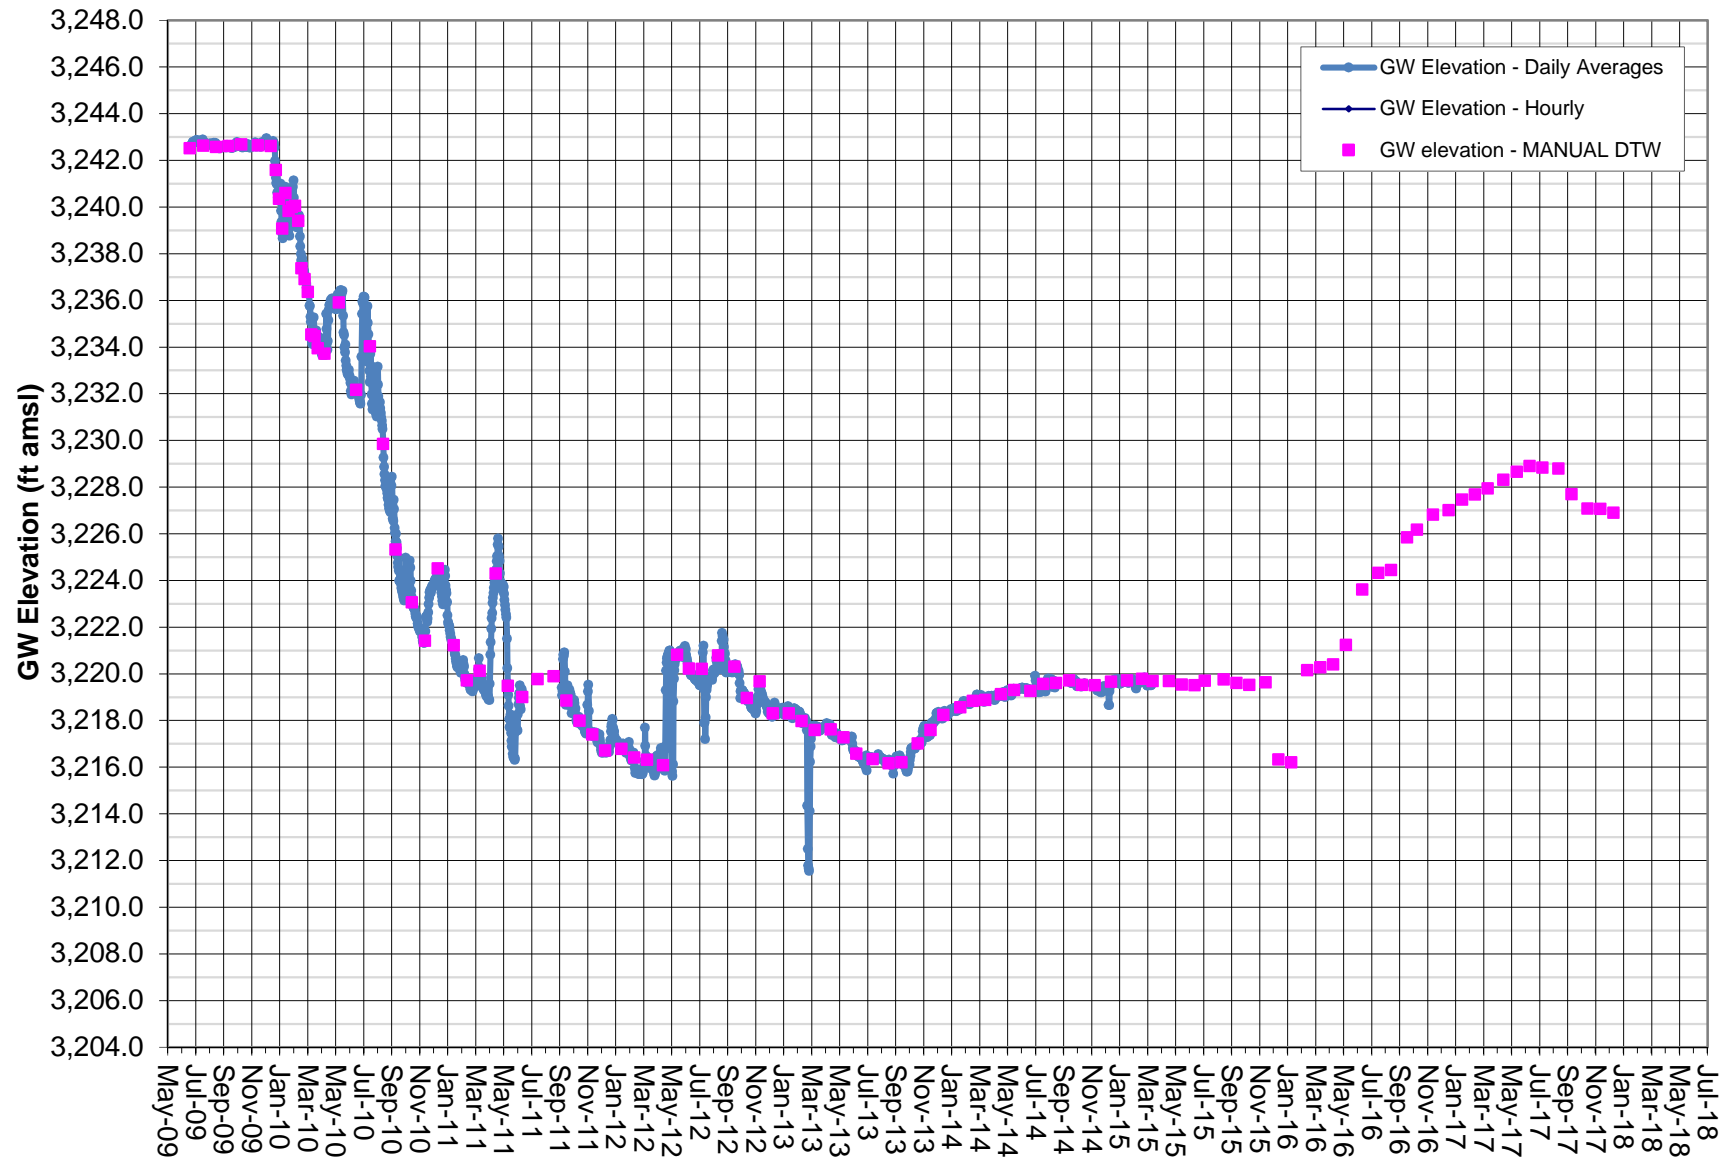


Note: Screened interval 370-420 feet.
Pressure Transducer removed in 2015, as approved by ICWD.

GROUNDWATER ELEVATION DATA - Transducer RV090 - Coso Junction Ranch Well

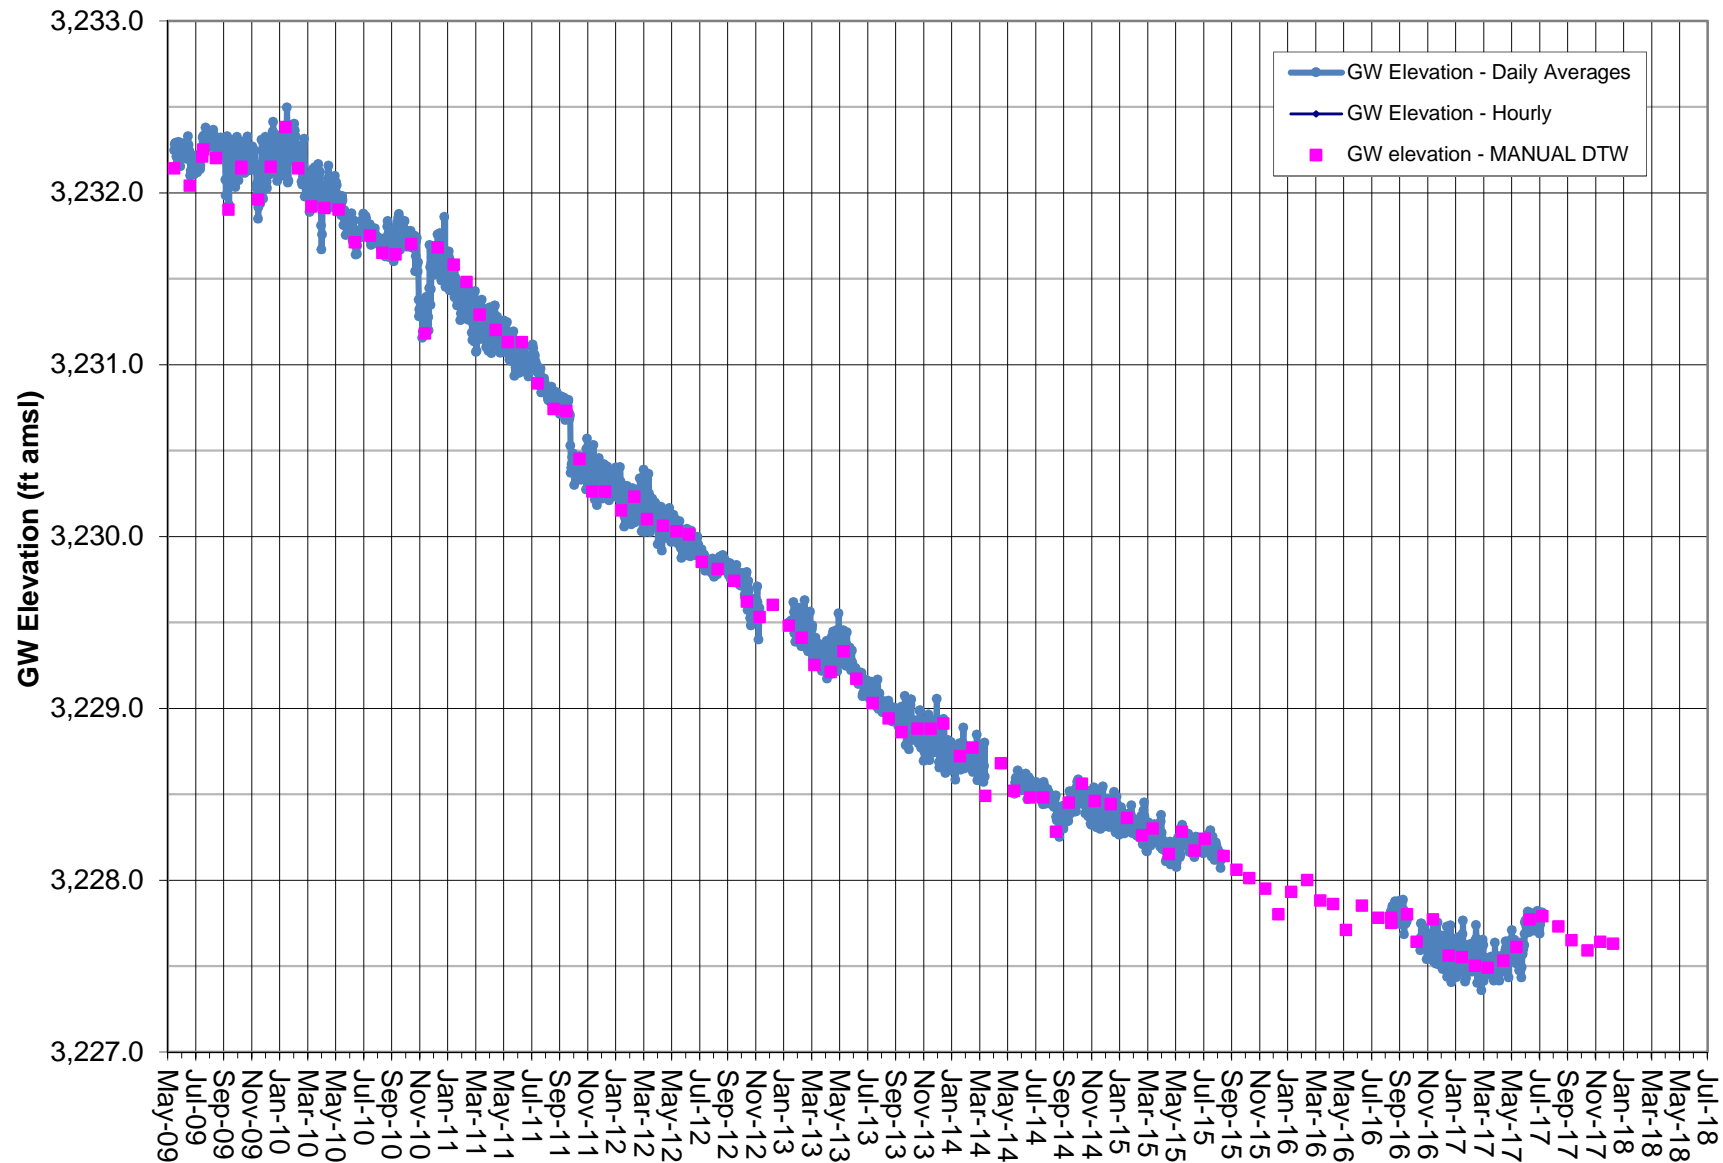


Note: Transducer data (absolute pressure) adjusted by data logged from BaroTroll and correlated to Manual DTW measurements.
COC initiated Hay Ranch Project pumping on 12/25/09.
Data gaps due to approved Pressure Transducer removal.

GROUNDWATER ELEVATION DATA - Transducer RV100- Coso Junction Store#1 Well

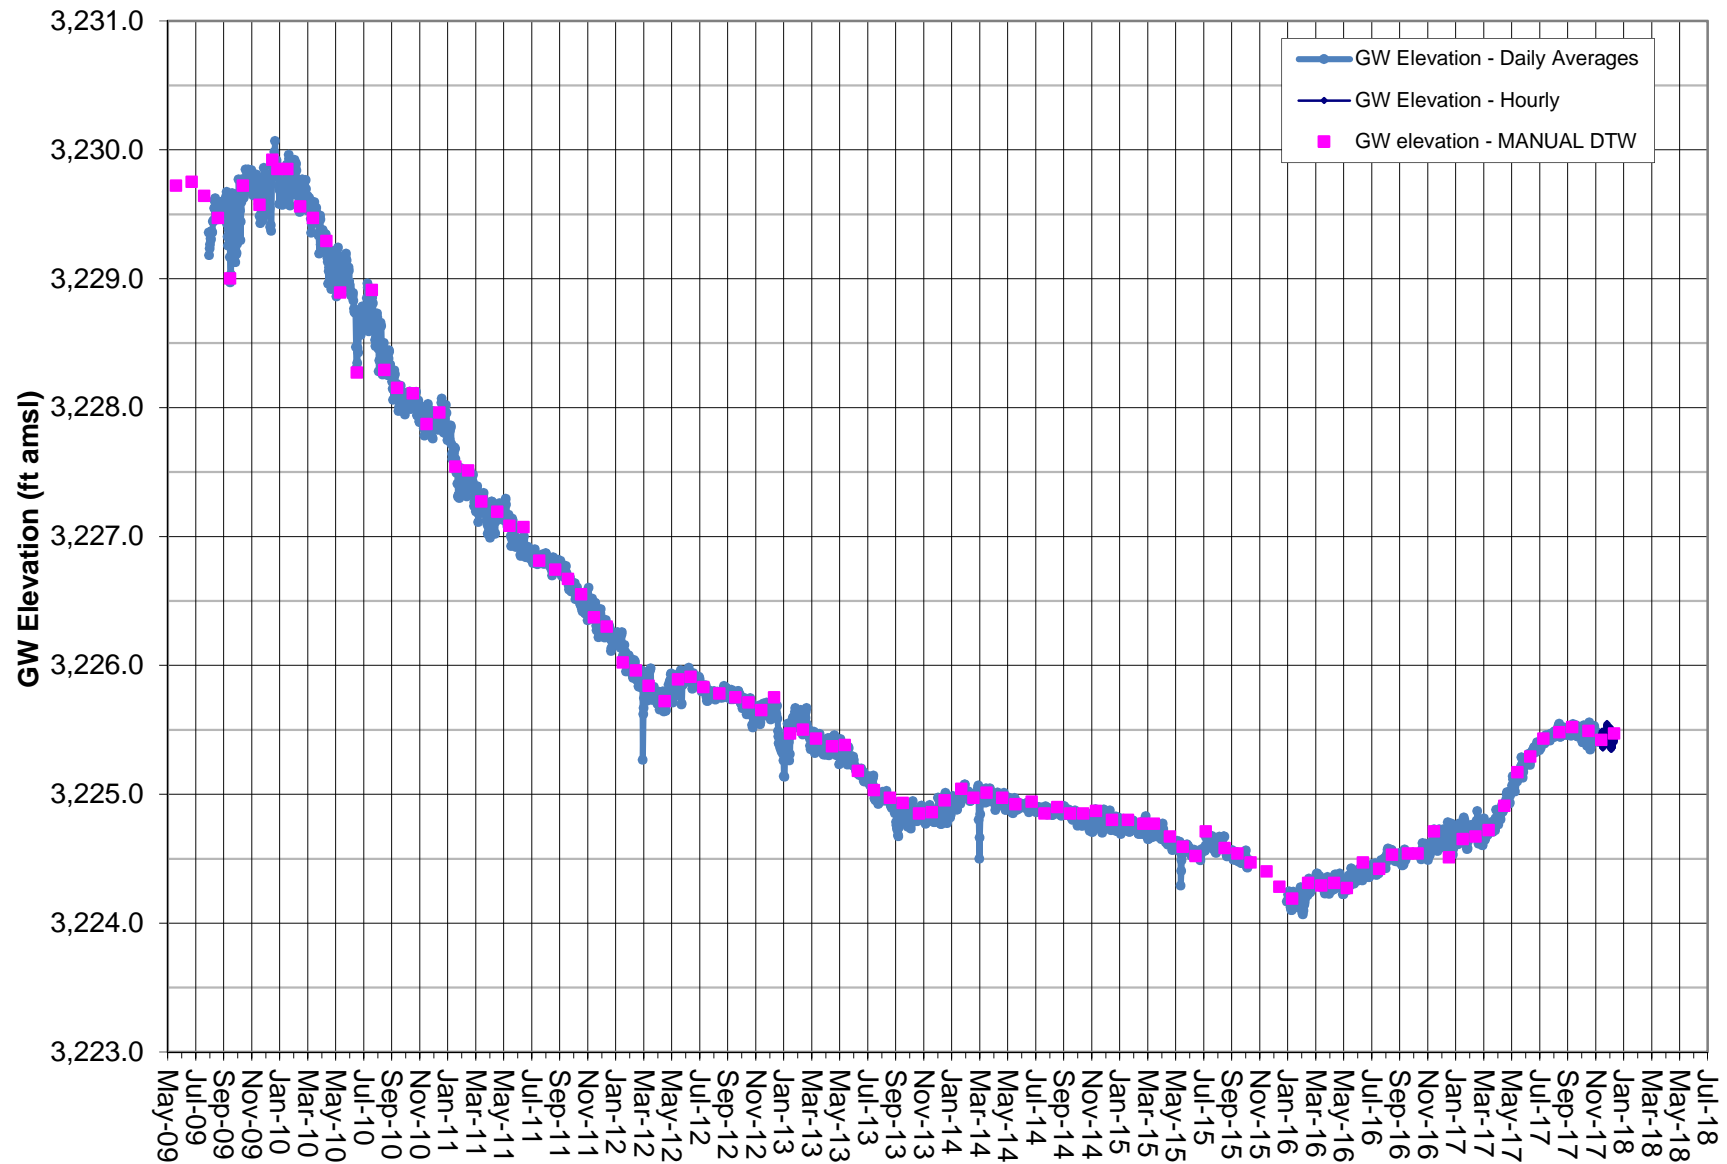


Note: Transducer data adjusted by data logged from BaroTroll and correlated to Manual DTW.
Data gap from Oct.-Dec. due to pressure transducer malfunction.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Transducer RV110 - Davis Ranch North Well

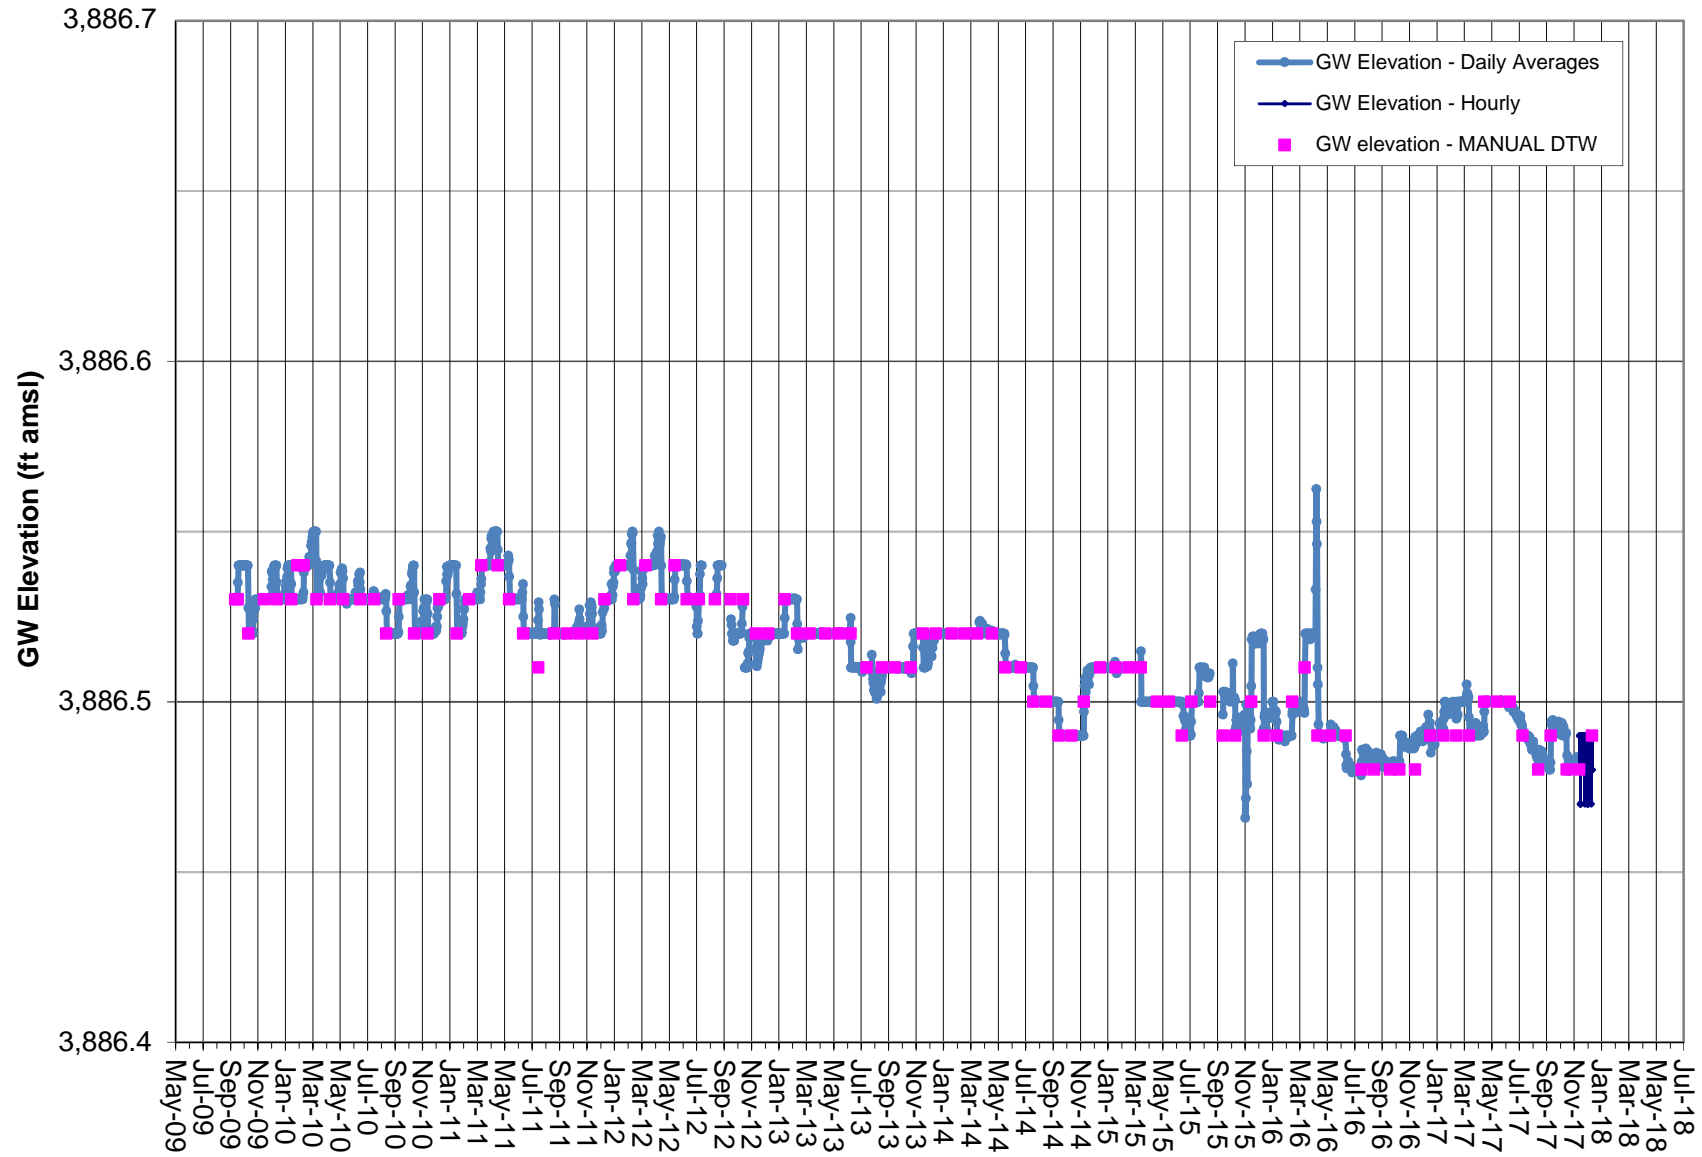

Note: Vented transducer data correlated to Manual DTW measurements.
DTW measured to .01 foot; GWE calculated using approximate surface elevation.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.


GROUNDWATER ELEVATION DATA - Transducer RV111 - Davis Ranch South Well

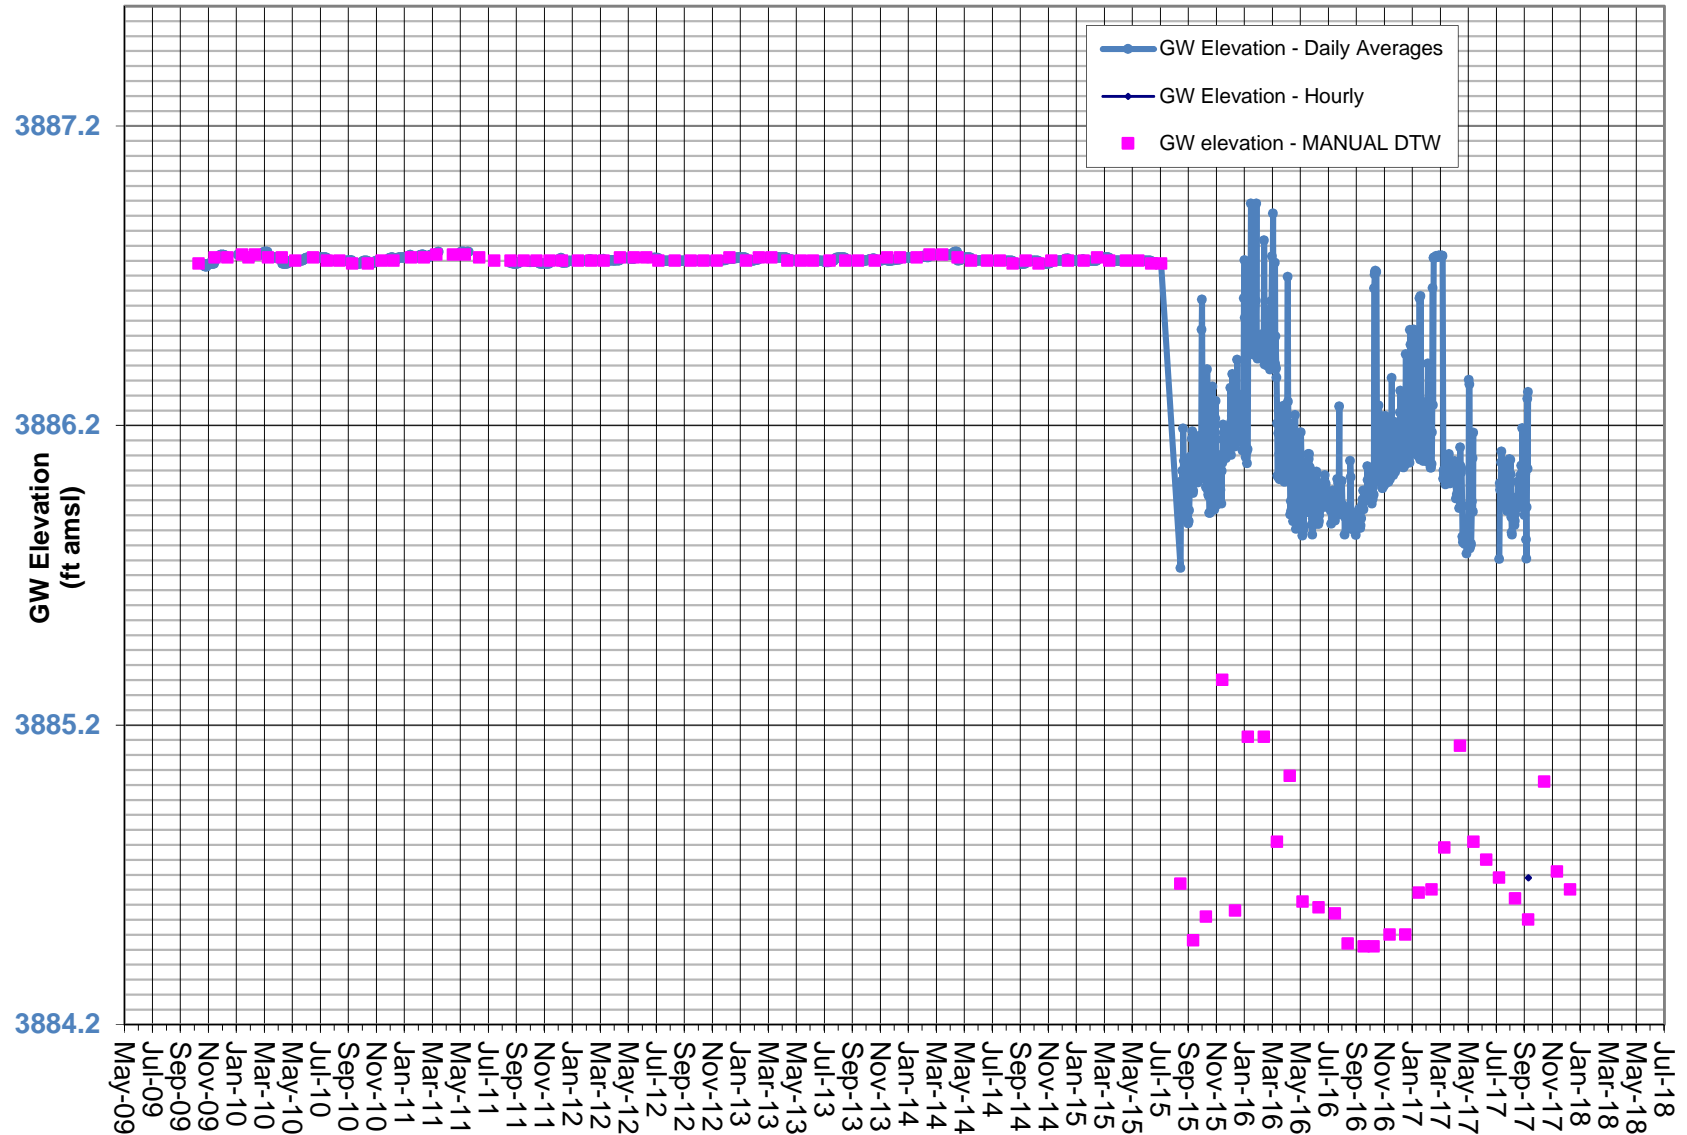

Note: Transducer data correlated to Manual DTW measurements.


Solar water supply pump installed in DR South in July 2015, which affects the accuracy of DTW correlation. Transducer removed 10/18/17.

GROUNDWATER ELEVATION DATA - Transducer RV120 - Red Hill Well

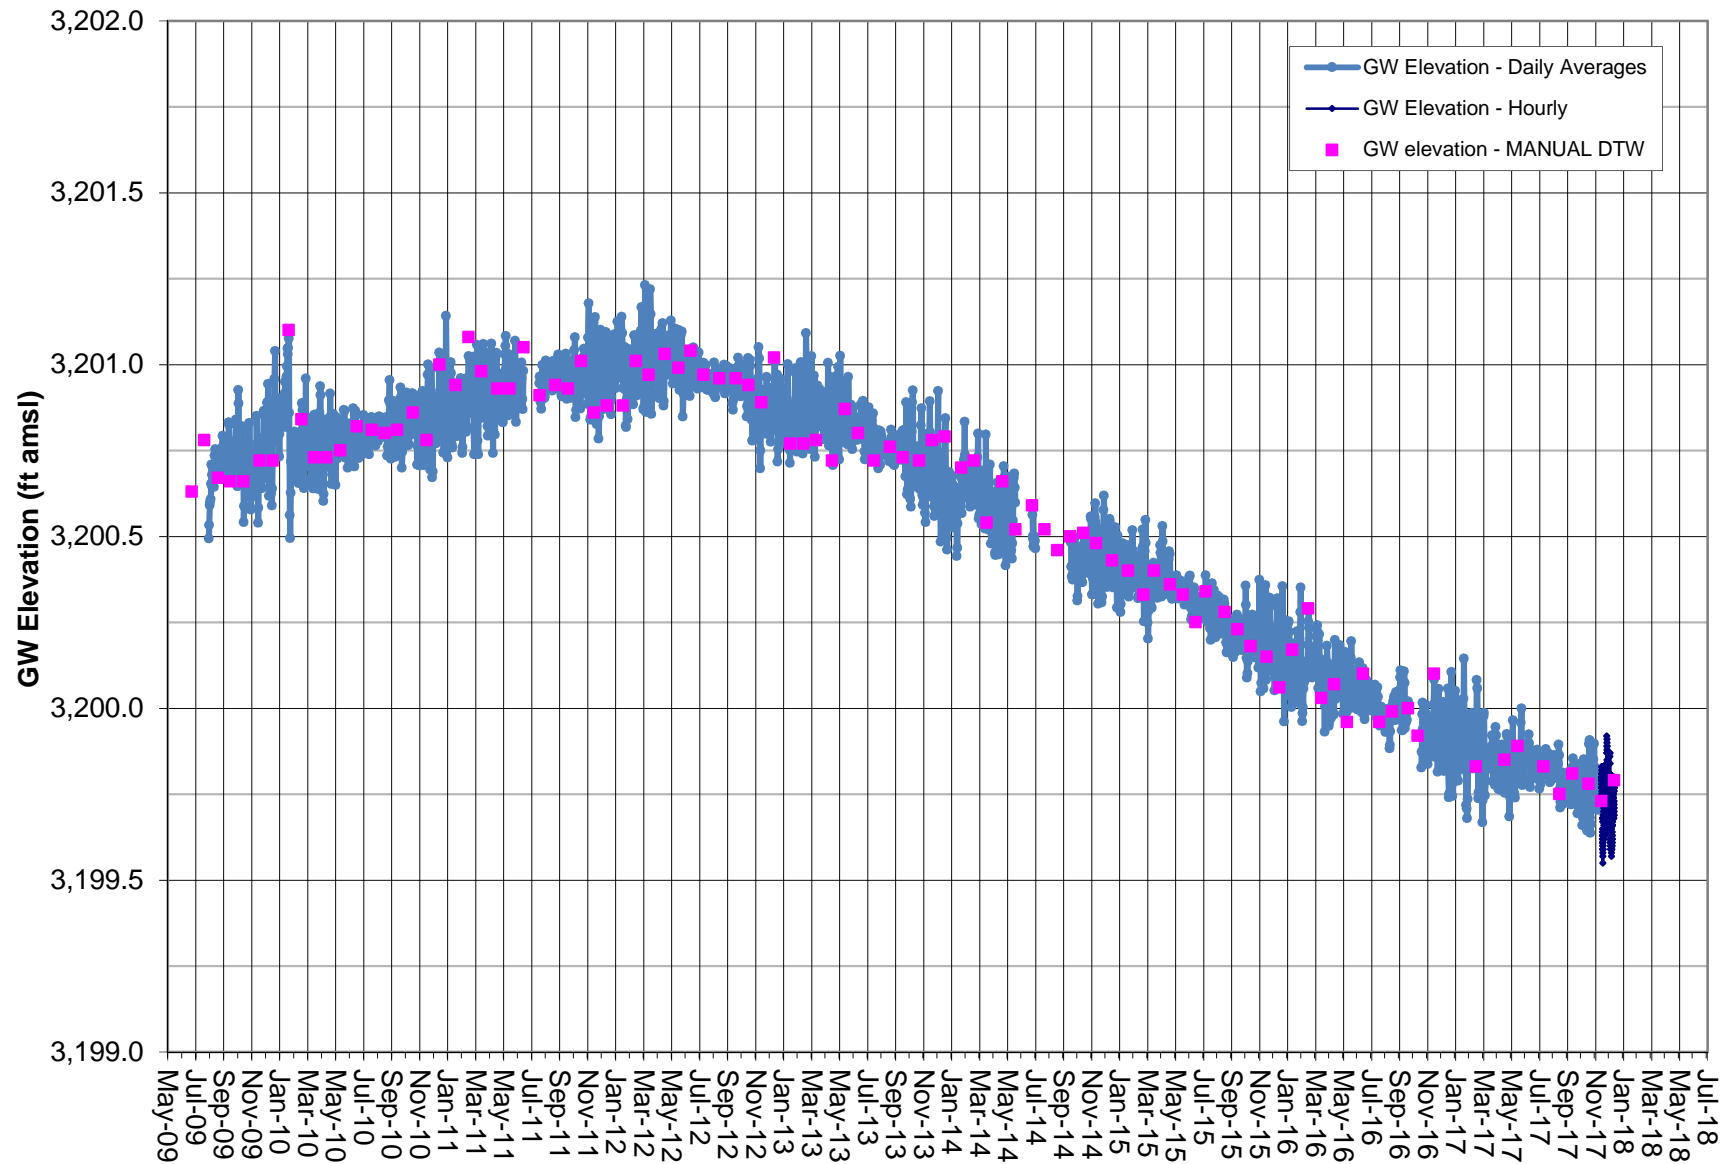


Note: Red Hill data gap in 2011 and 2014 due to transducer malfunction.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Transducer RV140 - Lego Well

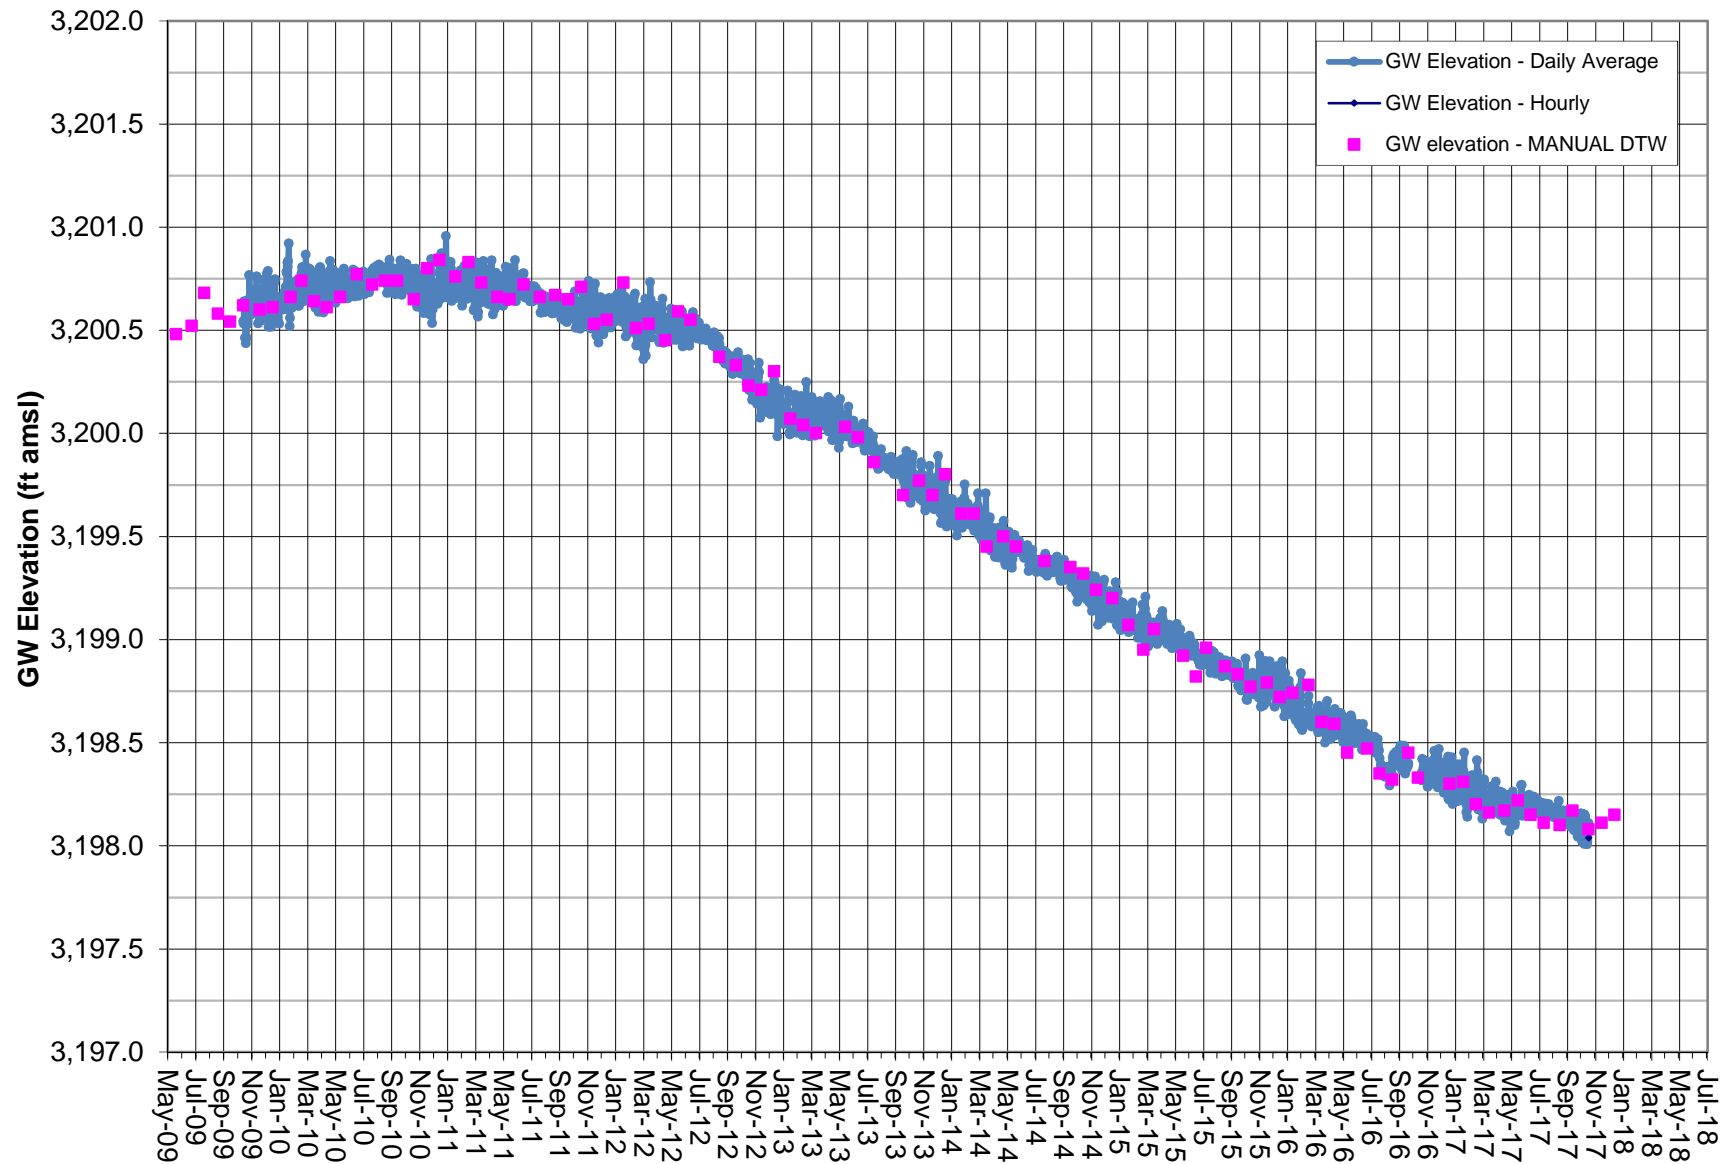


Note: Transducer data adjusted by BaroTroll and correlated to Manual DTW .
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09. Transducer removed 11/15/17.

GROUNDWATER ELEVATION DATA - Transducer RV150 - Cinder Road Well

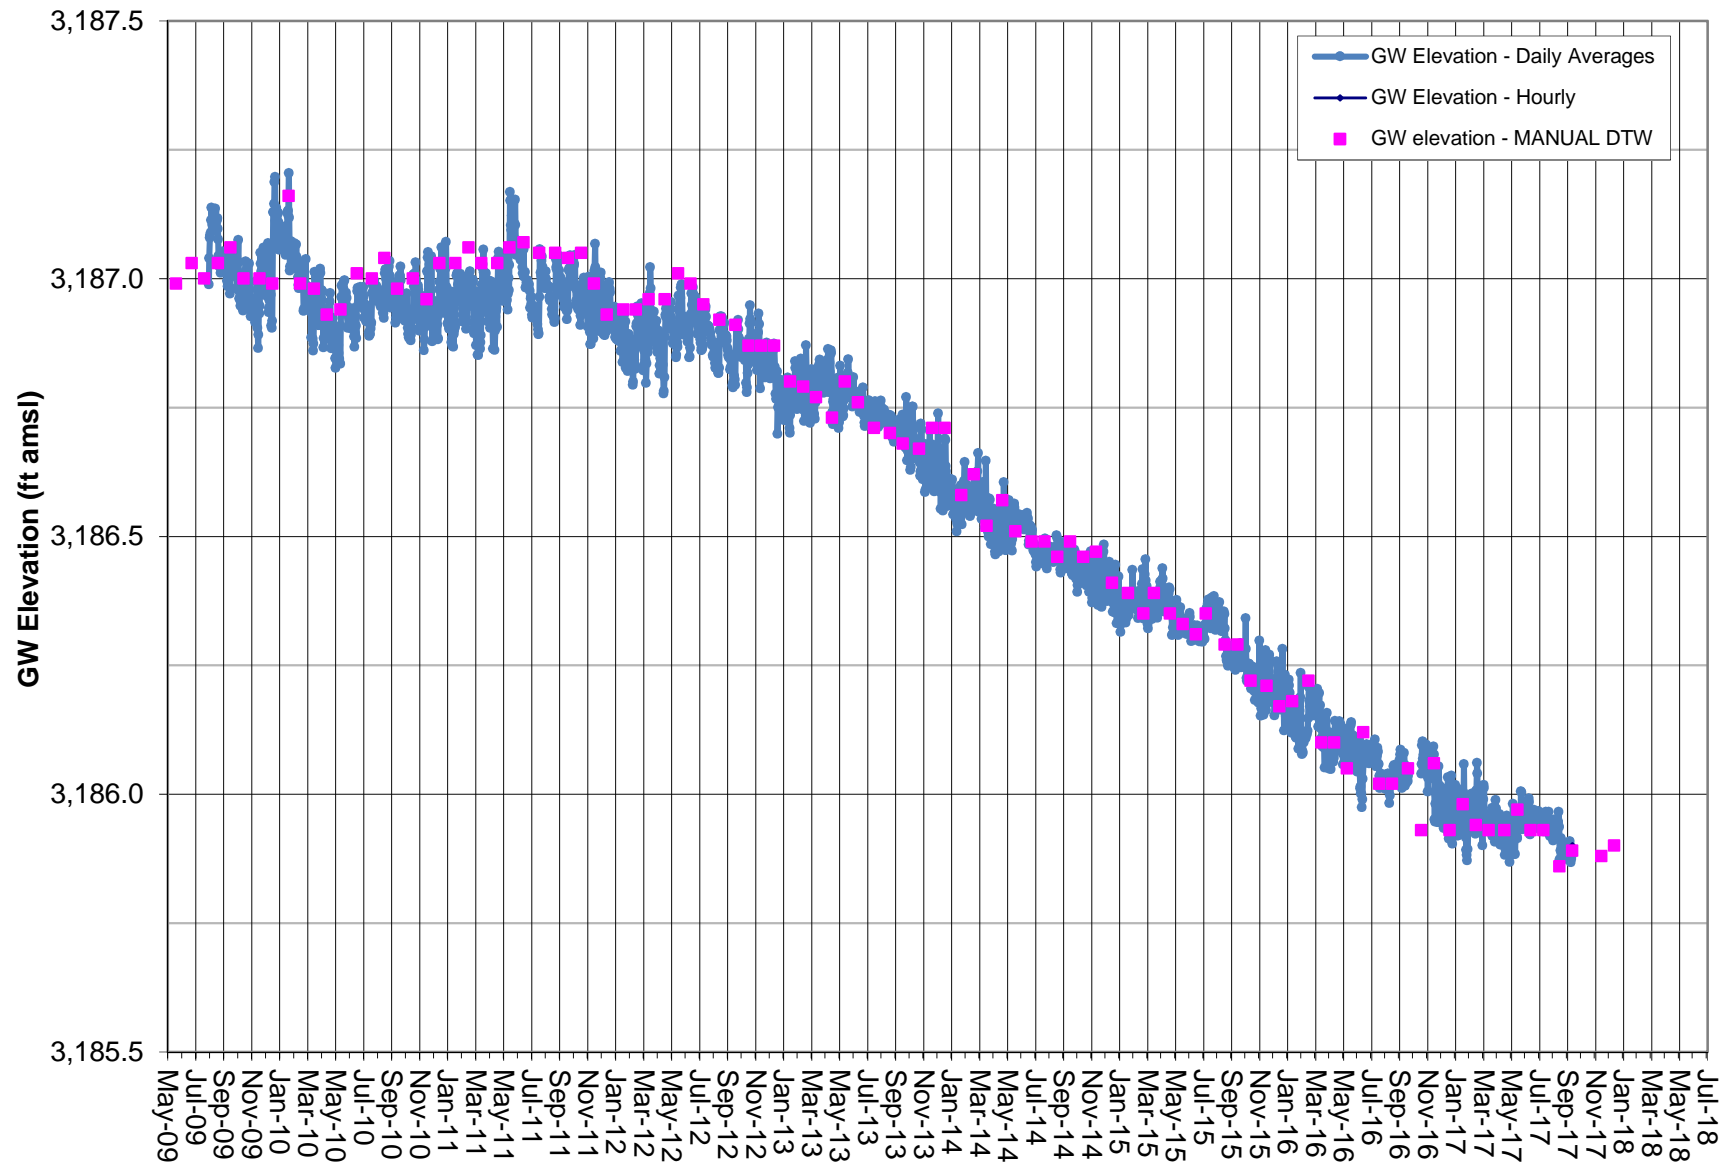


Note: Transducer data (absolute pressure) adjusted by data logged from BaroTroll and correlated to Manual DTW measurements.
Well damaged and transducer missing on Oct. 2017.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Transducer RV160 - 18-28 GTH Well

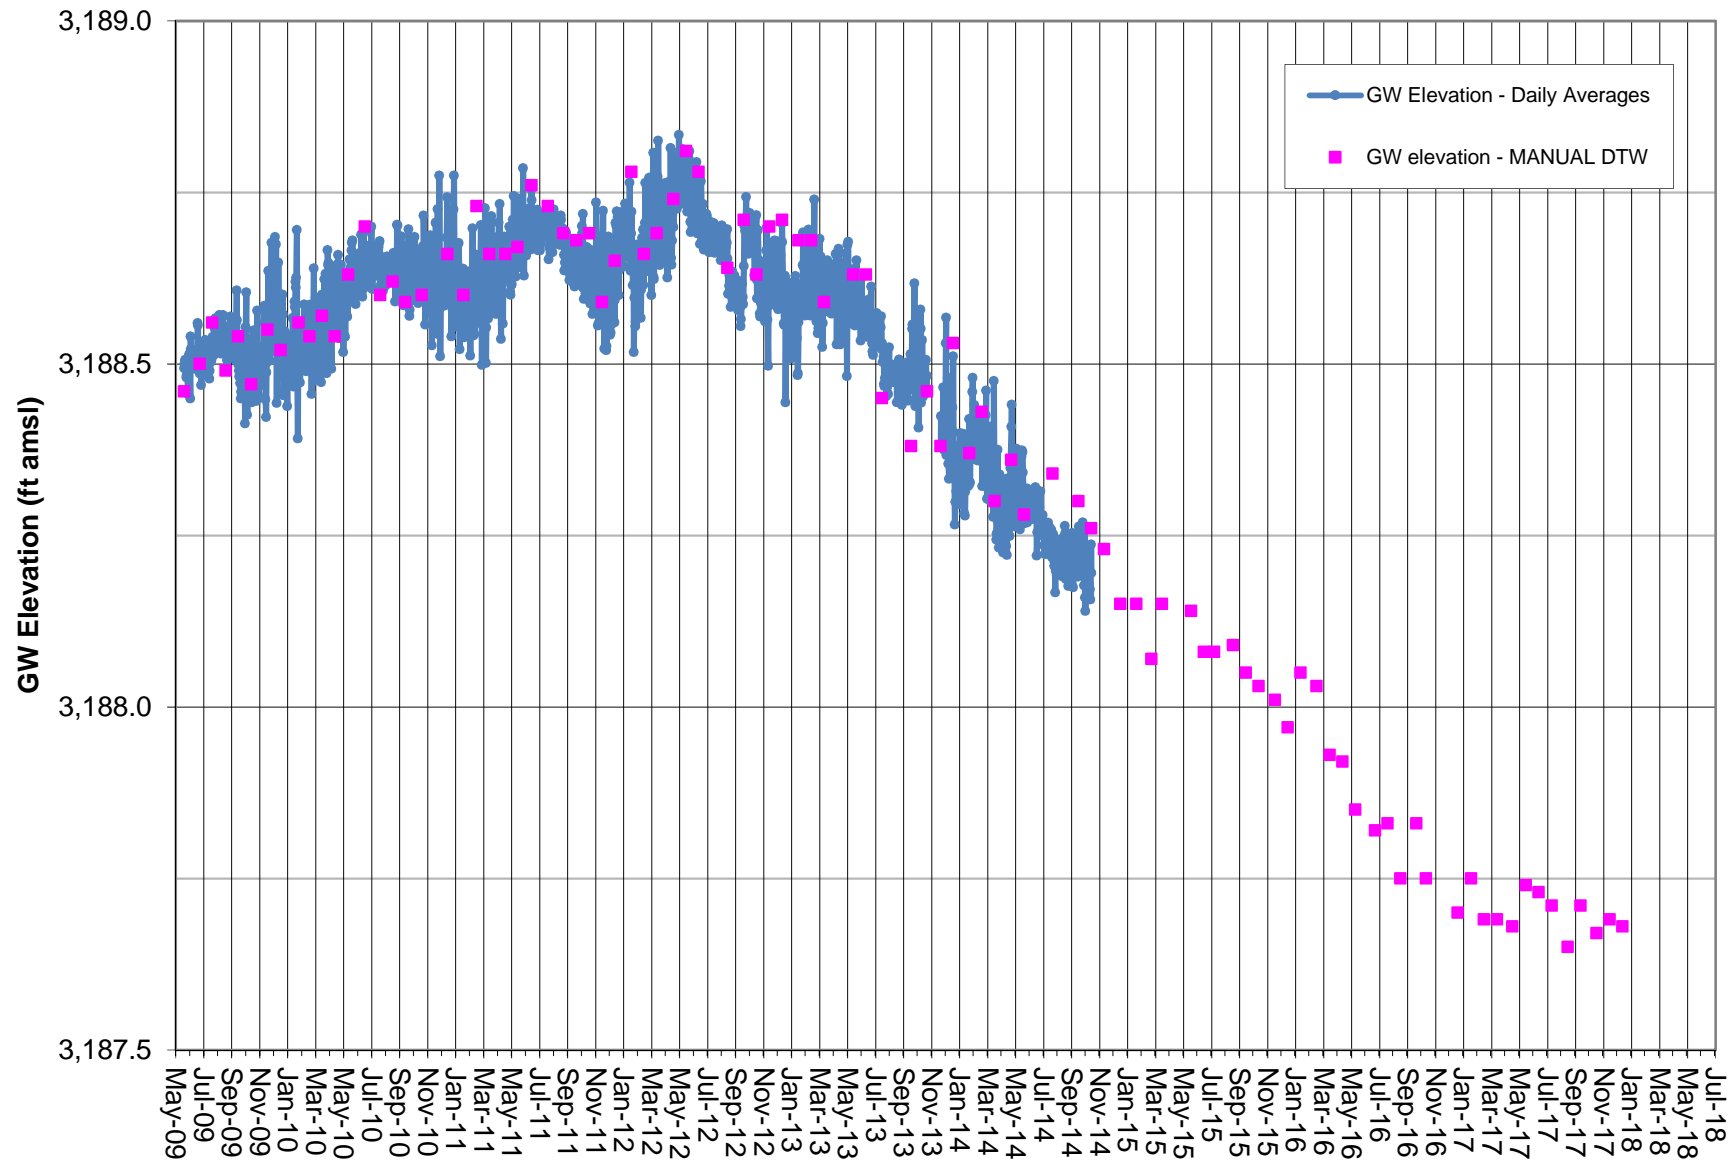


Note:
Pressure Transducer removed in 2015 as approved by ICWD.

GROUNDWATER ELEVATION DATA - Transducer RV180 - Little Lake Ranch North Well

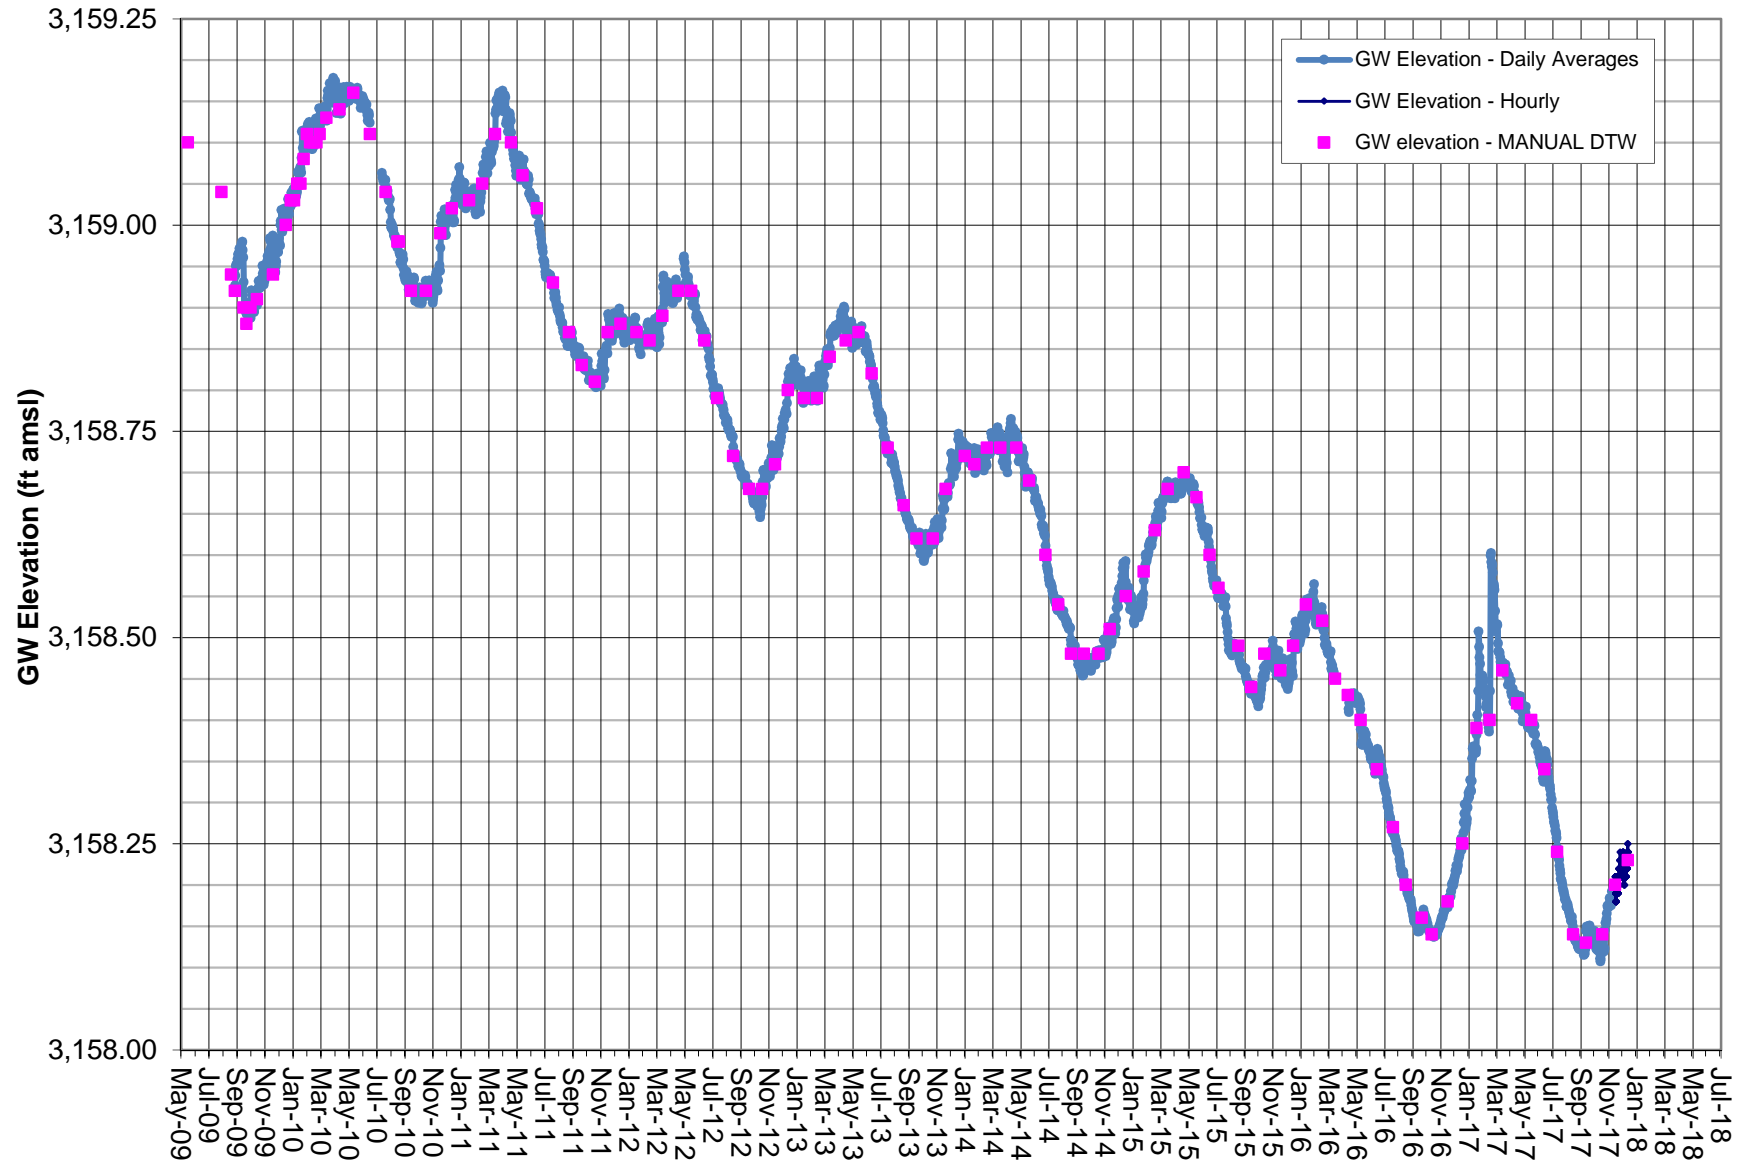


Note: Vented transducer data correlated to Manual DTW measurements.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Transducer RV210 - Little Lake Ranch Dock Well

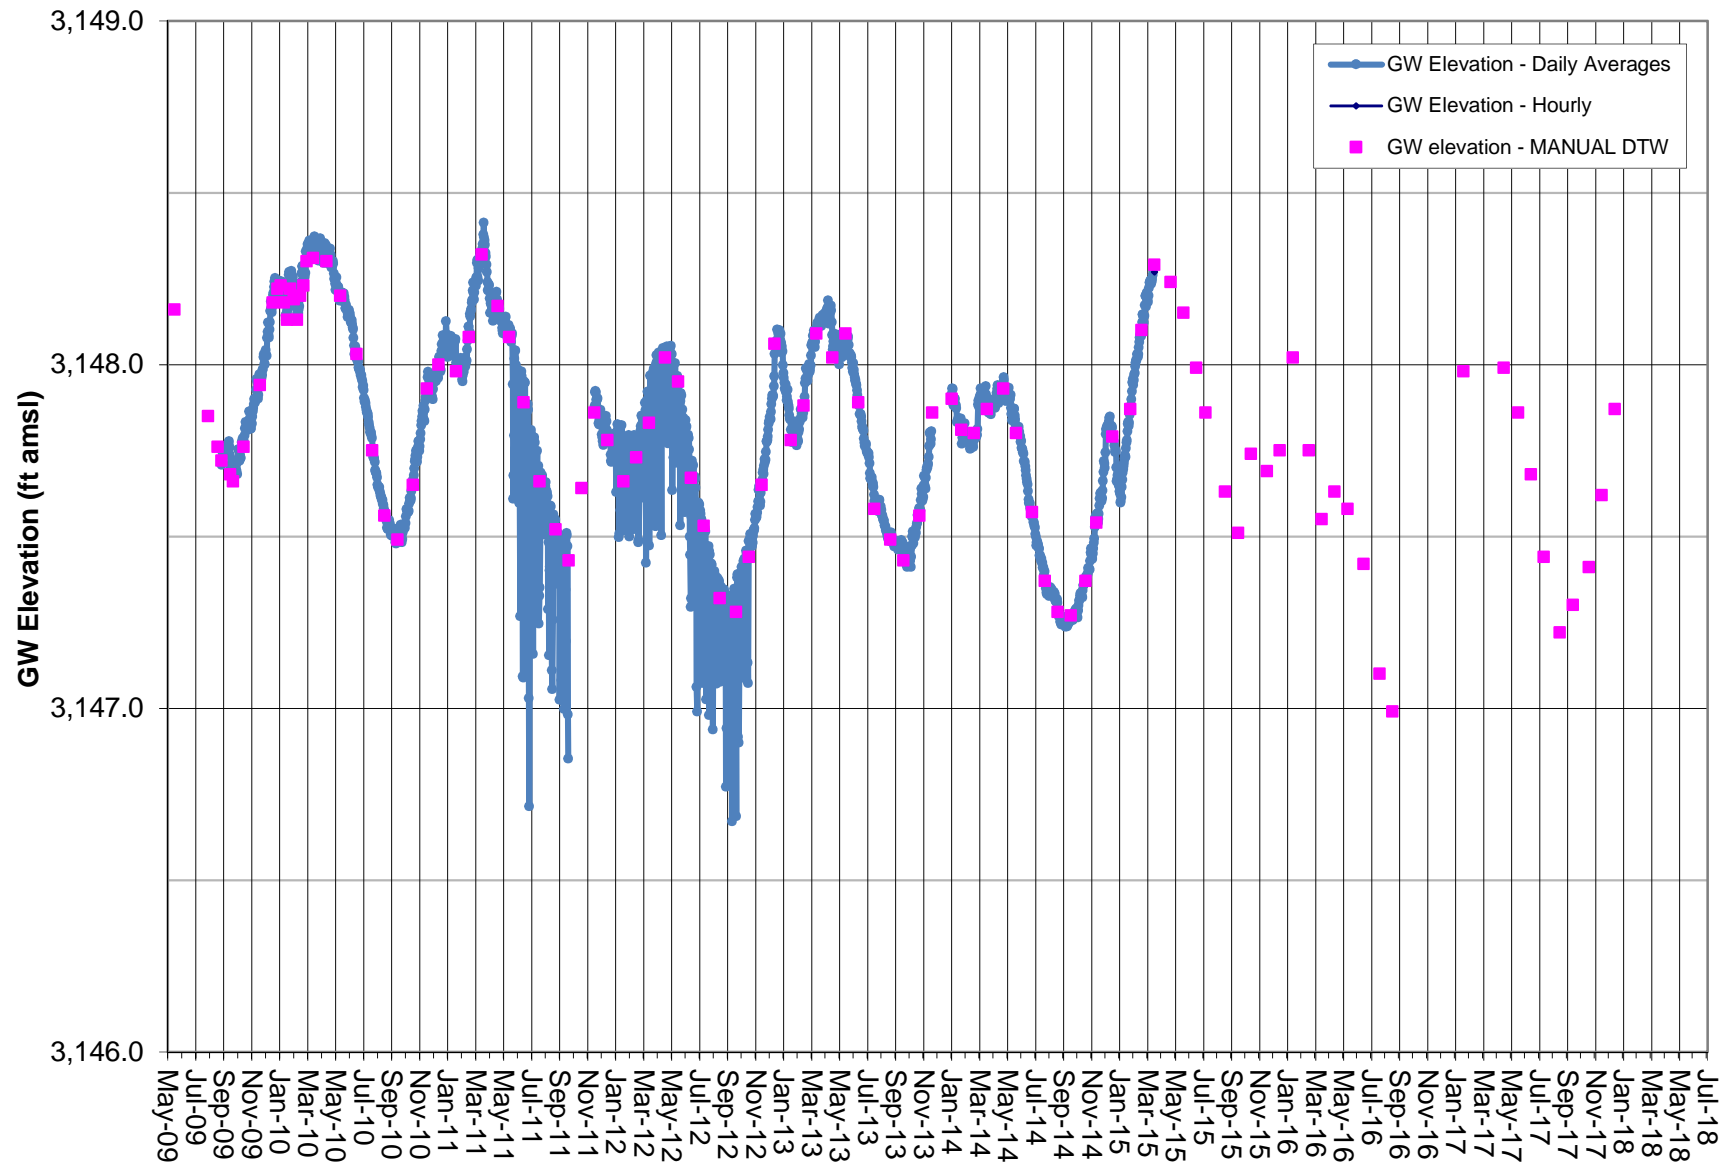


Note: Pressure Transducer removed in 2015 as approved by ICWD. Surveyed monitoring point altered by well owner after Jan 2017.

SURFACE WATER ELEVATION DATA - Transducer RV220 - Little Lake Ranch Stilling Well (Lake Surface)

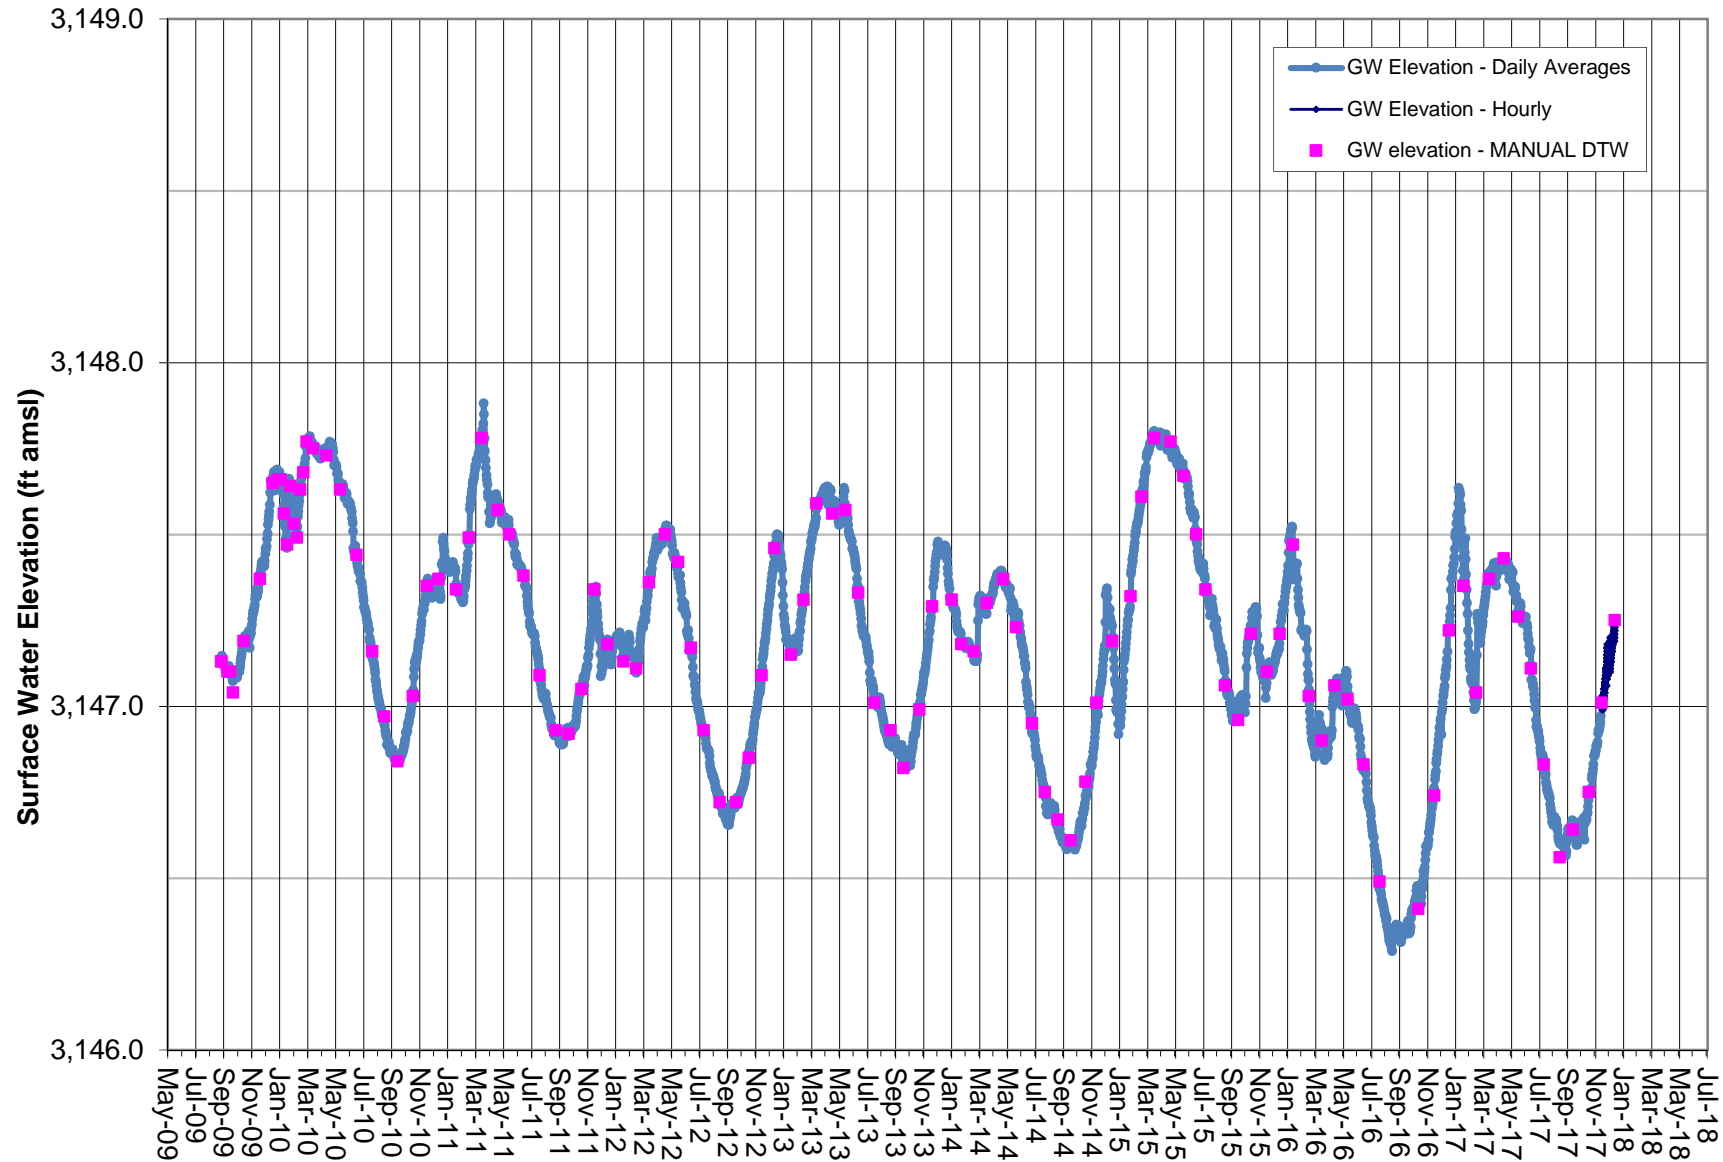


Note: Vented transducer data correlated to Manual DTW measurements. Represents surface water elevation of Little Lake.
Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

GROUNDWATER ELEVATION DATA - Transducer RV260 - Little Lake Ranch Hotel Well

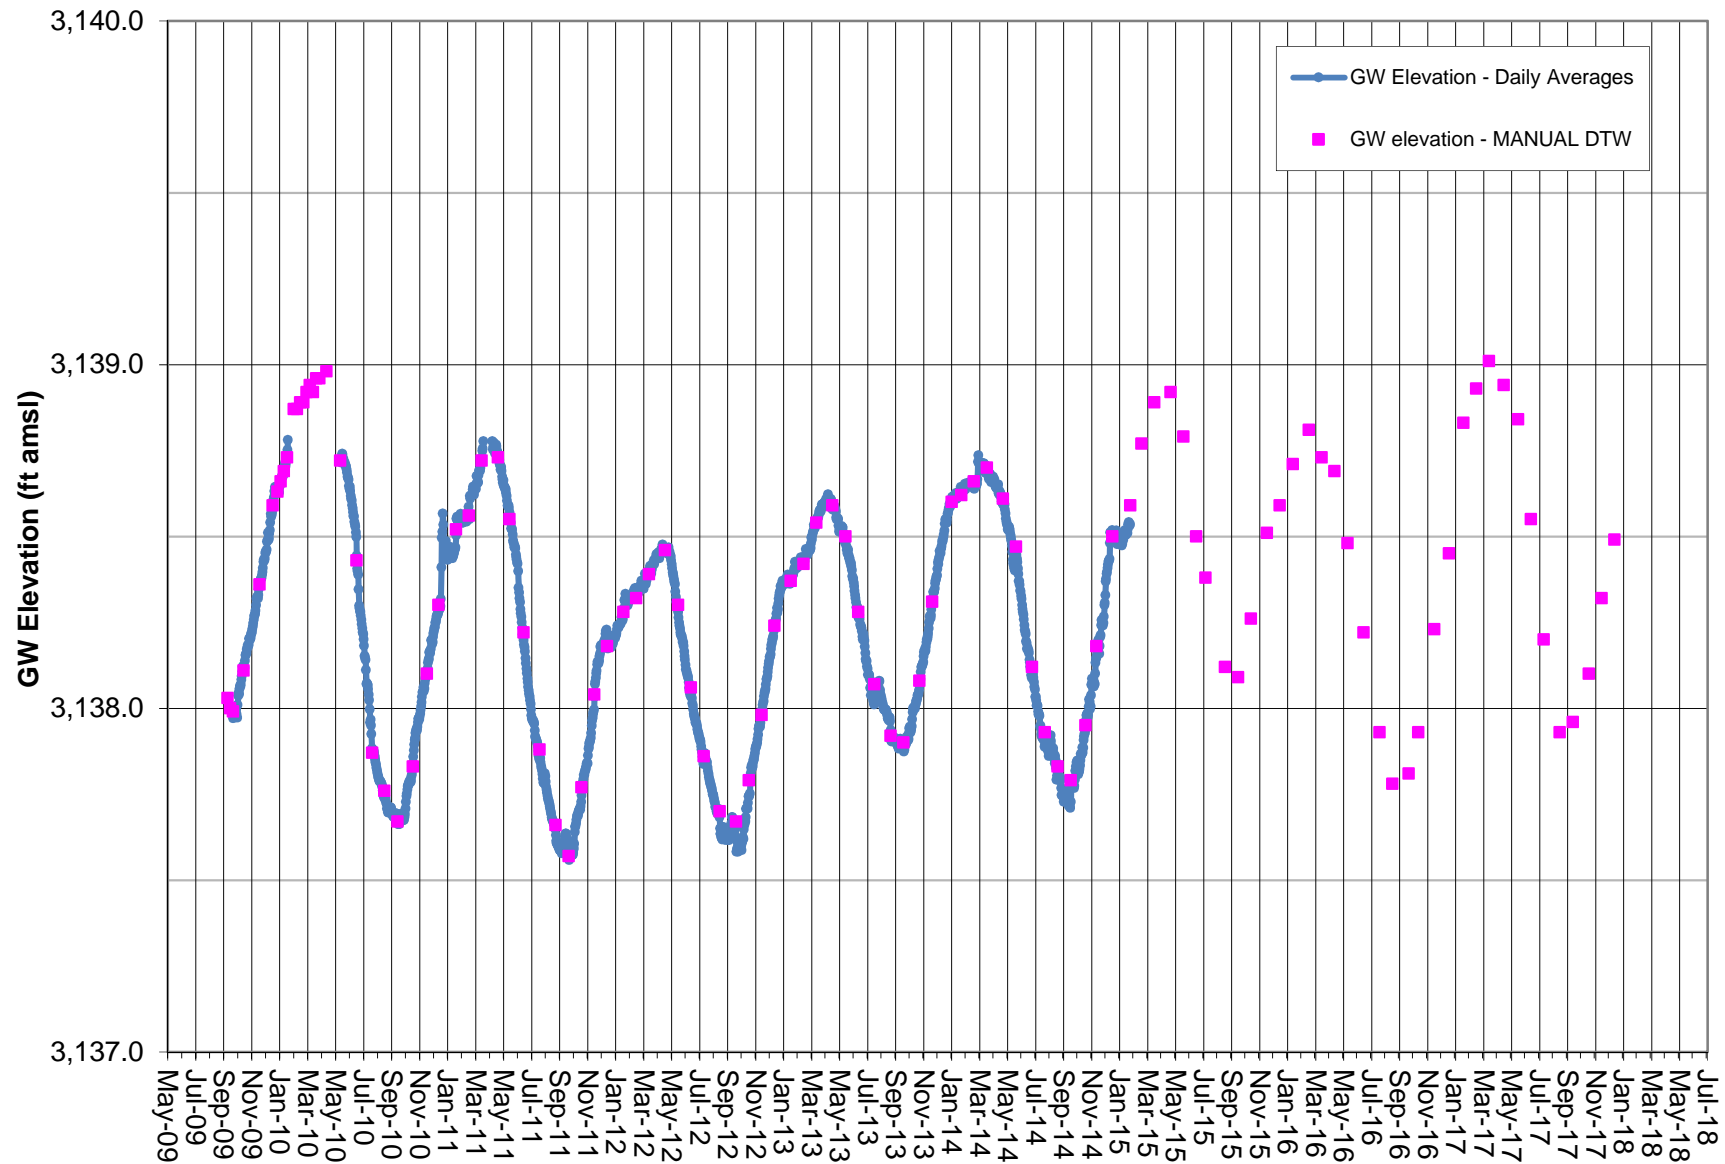

Note: Pressure Transducer removed in 2015 as approved by ICWD.


BAROMETRIC PRESSURE as Logged by BaroTroll

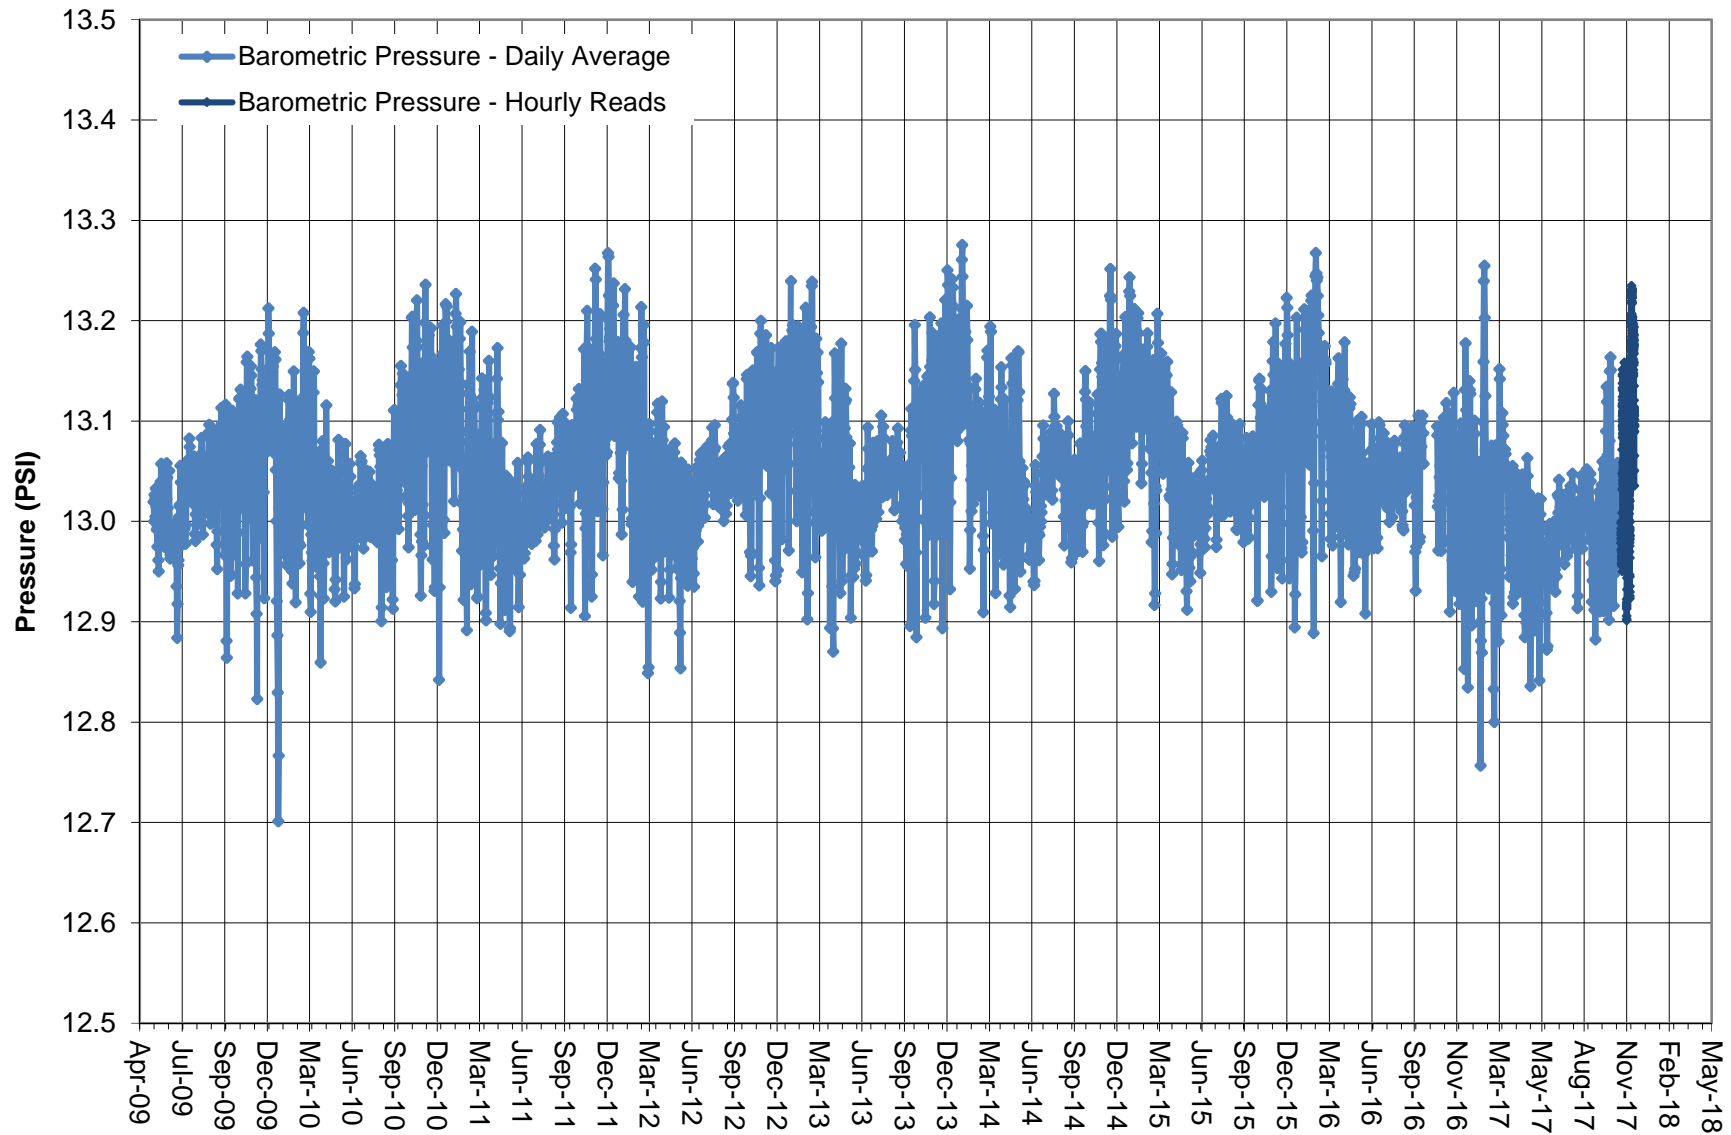

Note: BaroTroll located in well casing of well HR-2B.
Used to adjust pressure readings in non-vented transducers.
BaroTroll stopped working and was replaced 10/19/2016.


SURFACE FLOW TRANSDUCER

Surface Flow- Transducer RV 112- Davis Ranch South Flow

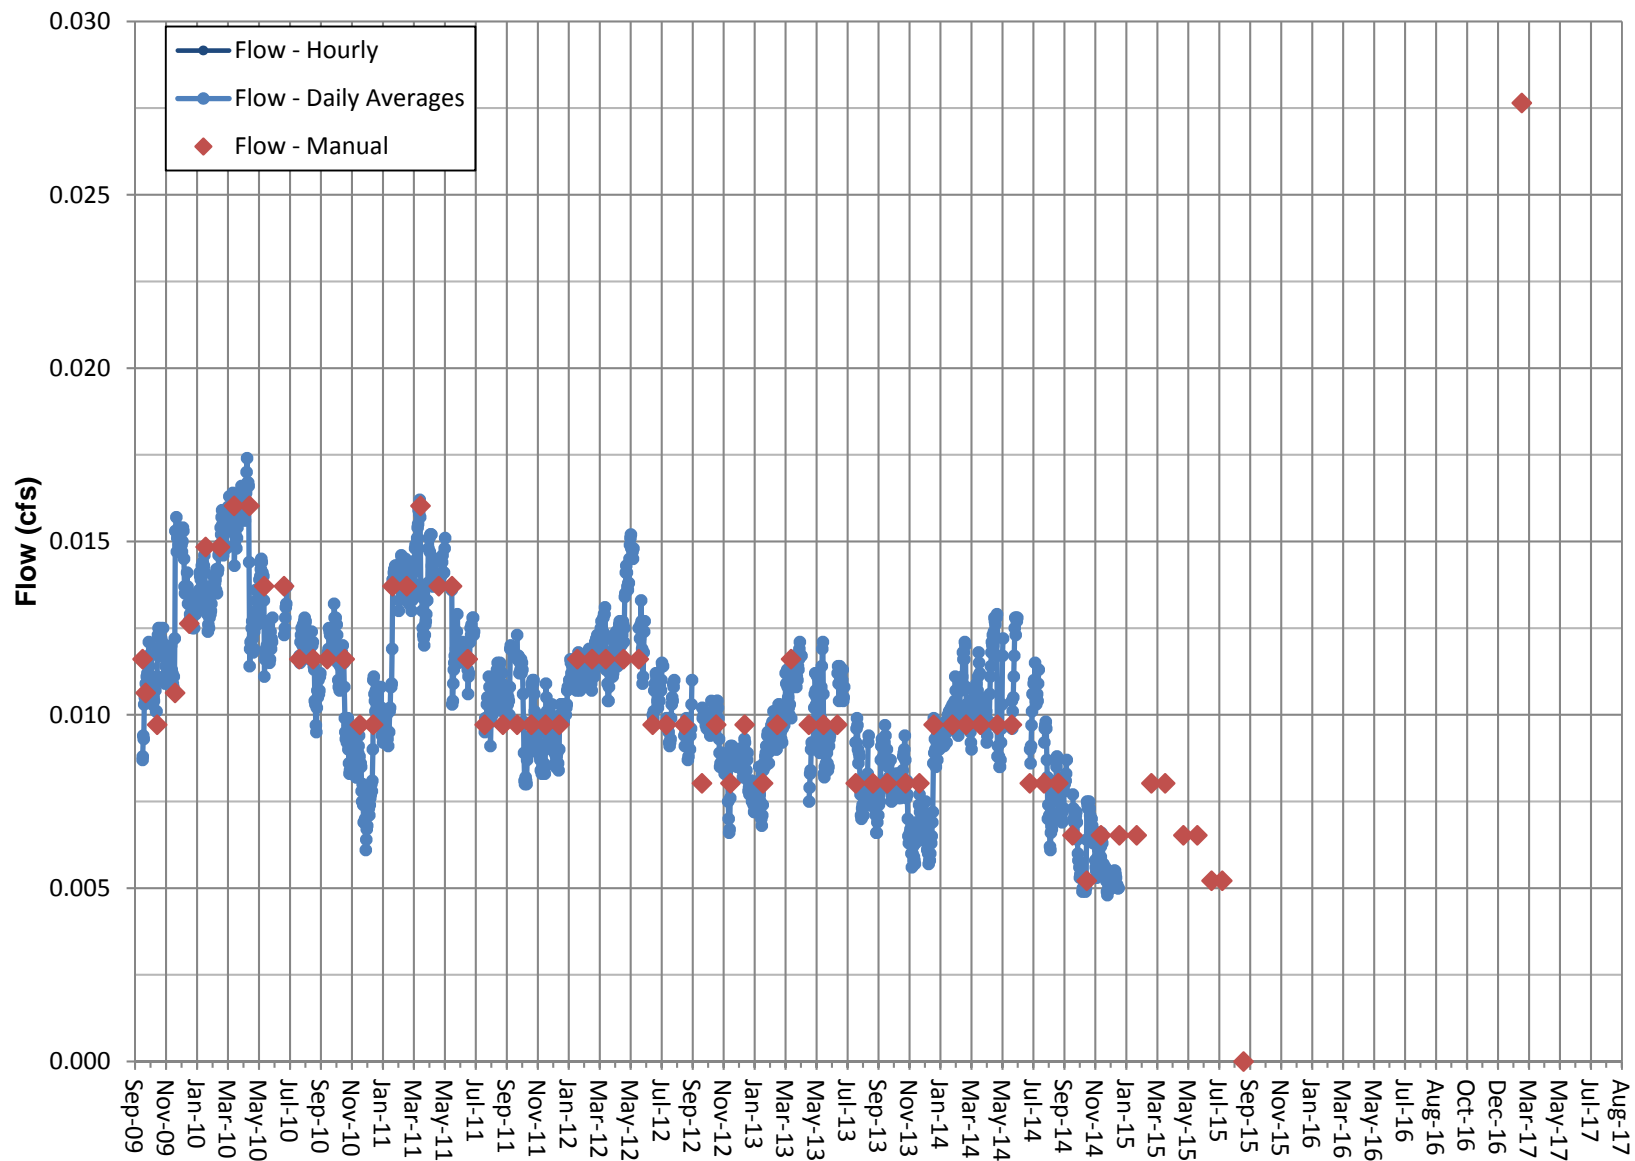


Note: Transducer removed in 2015, water supply pump was installed in DR South Well in July 2015. Pumped water can now bypass flume, flow not monitored as of Sept. 2015.

Surface Flow- Transducer RV 230- Little Lake Outflow

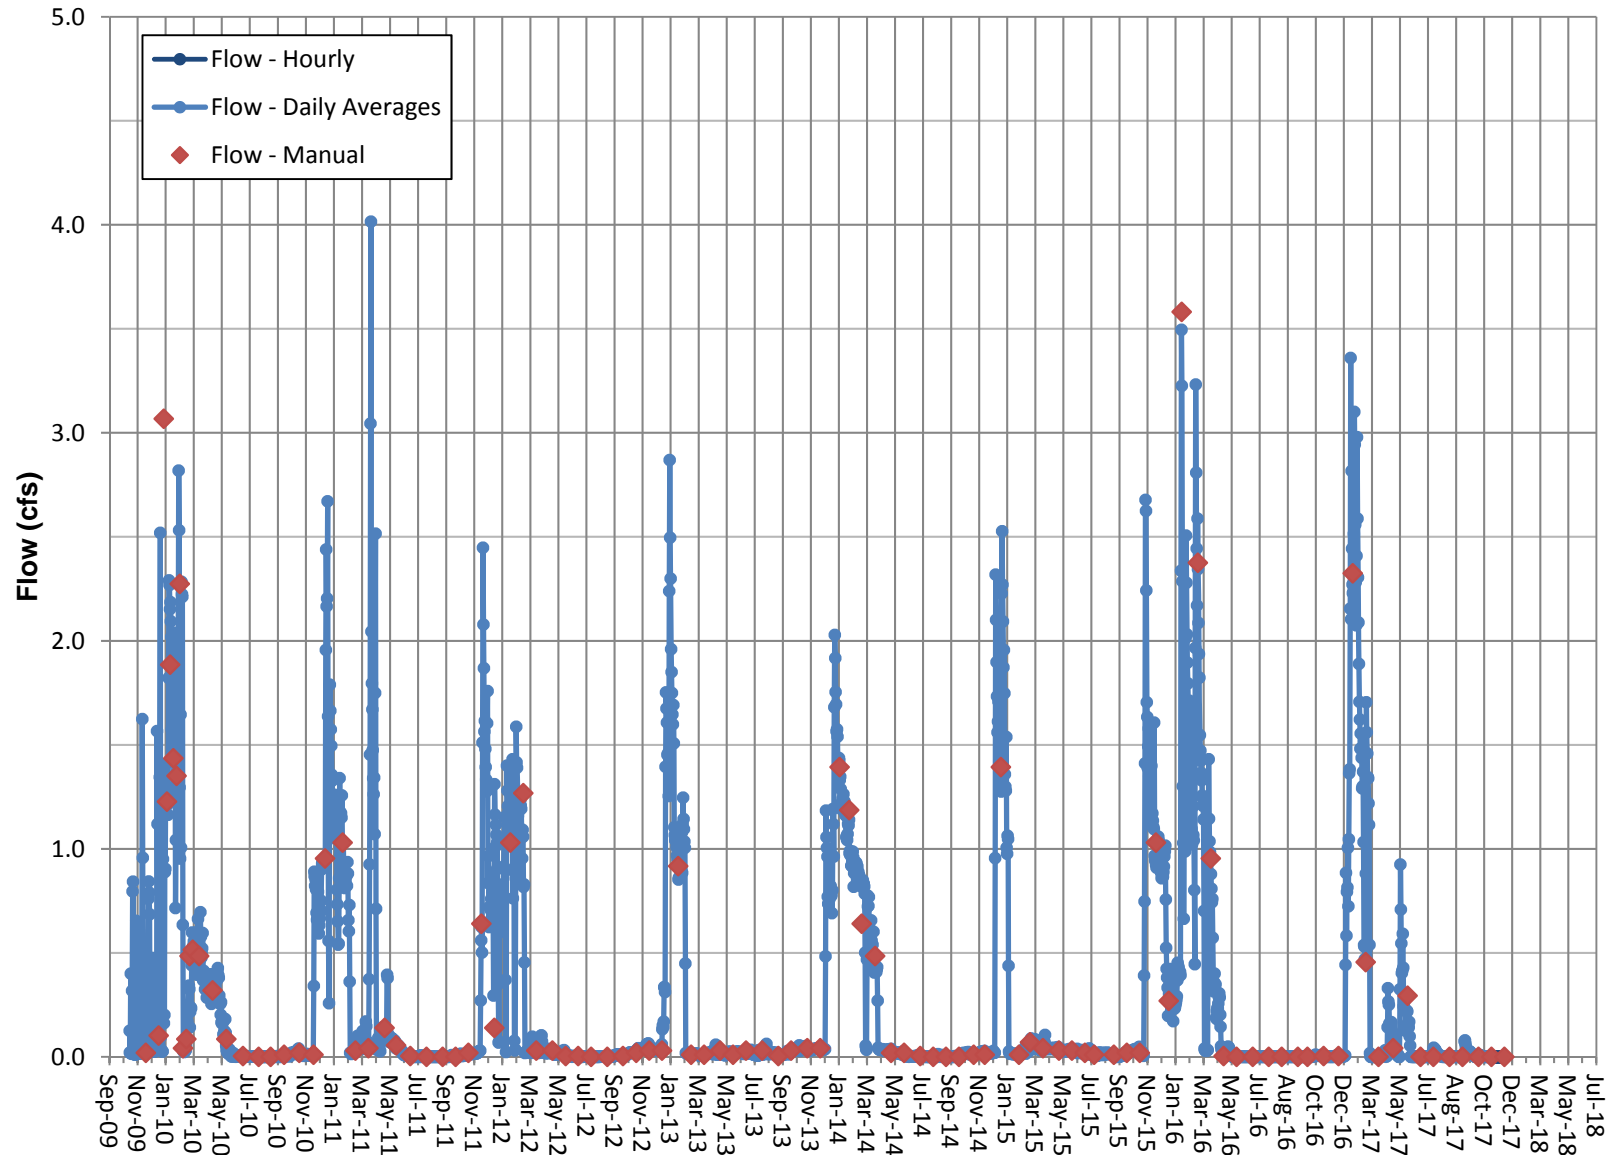


Note: Flows through Little Lake Outflow are influenced by natural and water management processes at Little Lake Ranch. Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.

Surface Flow- Transducer RV 240- Coso Springs

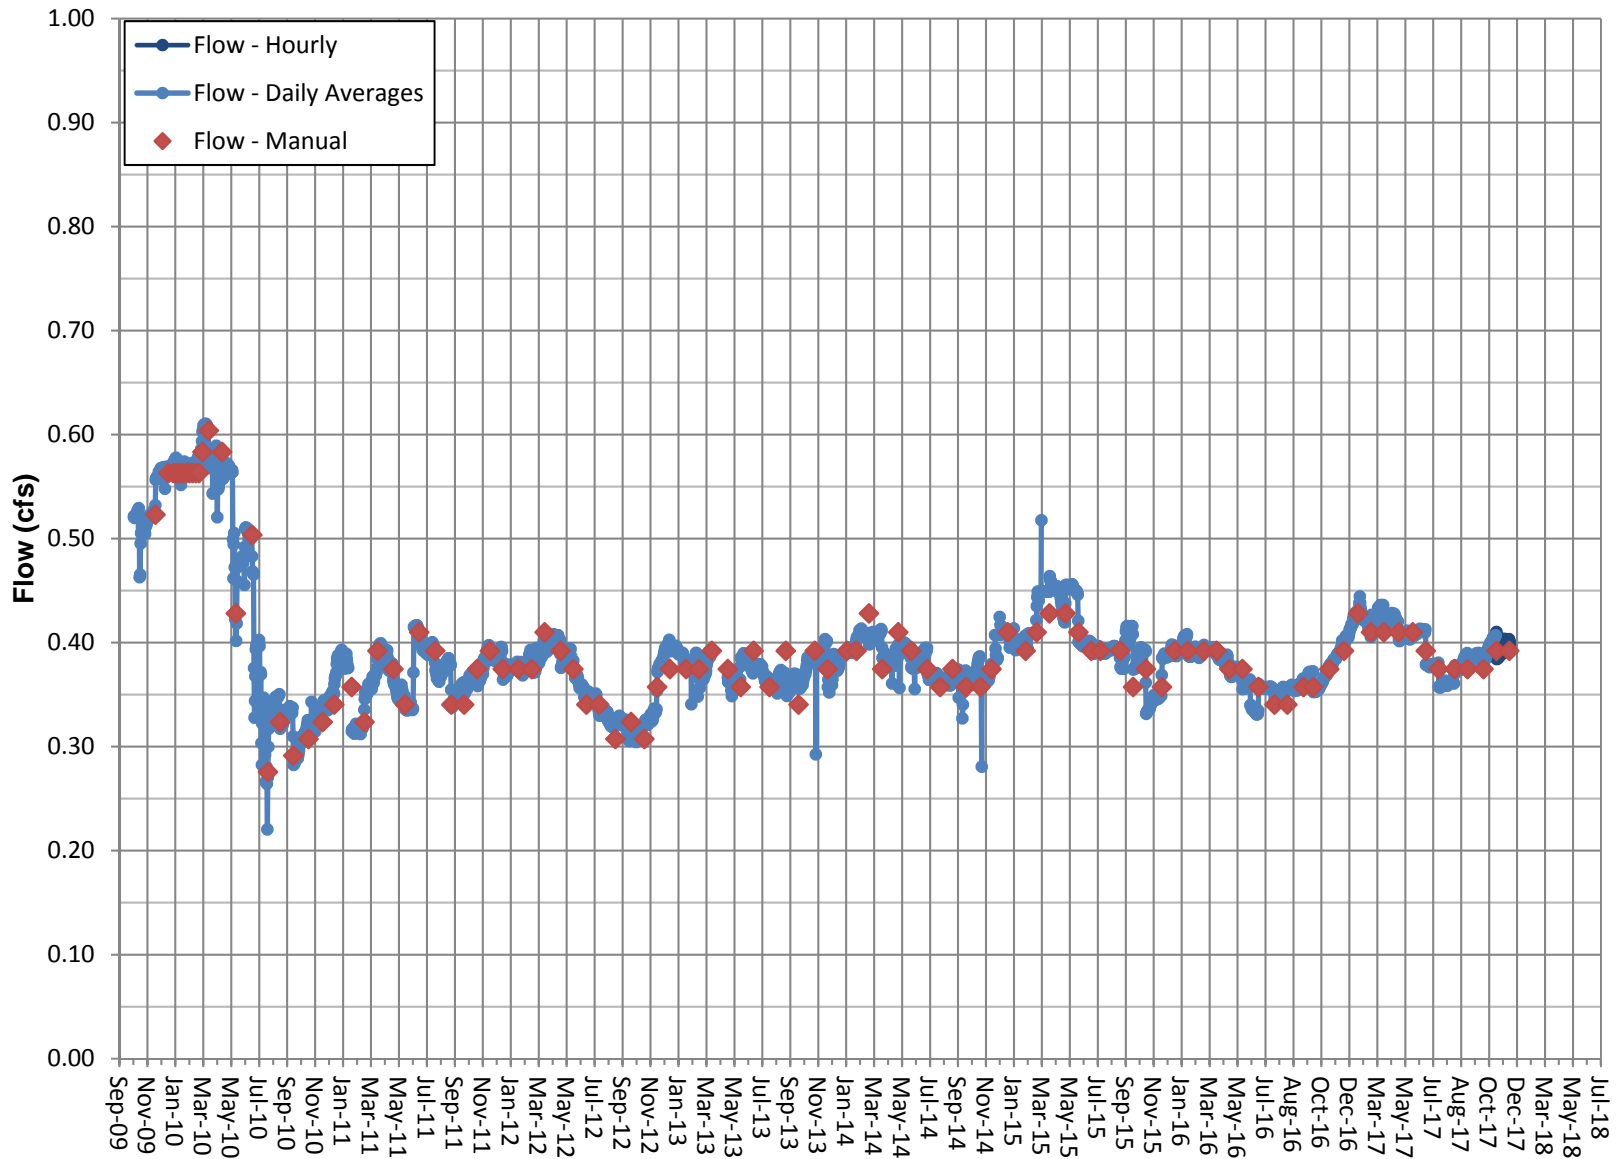

Note: Coso Springs is an artesian spring.

Surface Flow- Transducer RV 245- North Culvert

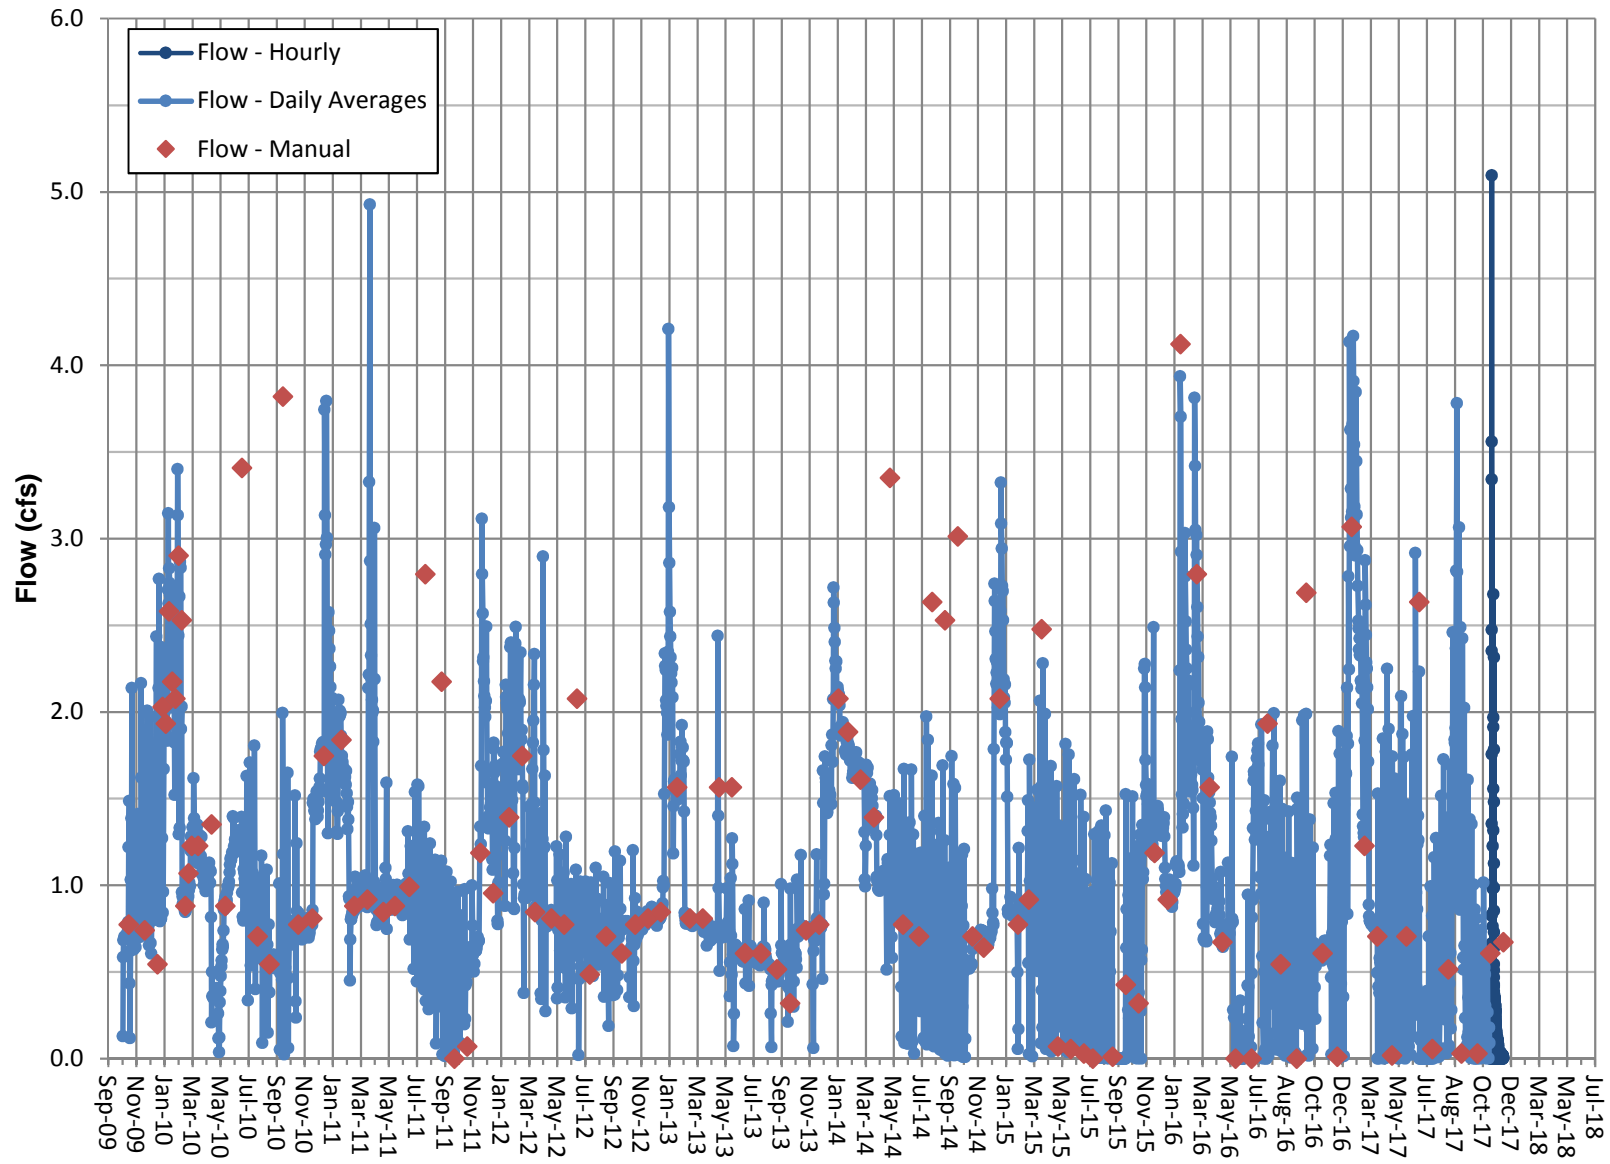

Note: Flows through North Culvert are influenced by natural and water management processes at Little Lake Ranch. Coso Operating Co. initiated Hay Ranch Project pumping on 12/25/09.